

Kubota

TRURE



COMPANY PROFILE

HARD-WORKING KUBOTA TOOLS TO HELP YOU GET MORE DONE

For more than 50 years, Kubota has been your partner in pursuit of your property dreams.

As a do-it-yourselfer, you count on hard-working tools to help you get more done every day. And, like you, Kubota believes anything worth doing is worth doing right.

Whether you manage a two-acre yard or 2,000-acre ranch, hay field or construction site, our precision engineered orange equipment helps you conquer your goals one project at a time.

The entire Kubota product line – from utility vehicles and mowers, to tractors, hay tools and a full range of construction equipment – is quality built to keep you growing and improving your property, your business, and your community for years to come.

This brochure is a comprehensive look at our entire line and all the hard-working tools ready to help you get more done. Check out our recent innovations, new market entries, and products you likely already know well. We are constantly evolving to expand our products to better meet your needs for today and well into the future.

For more ideas to help you get more done, visit our website at KubotaUSA.com.

Kubota[®]



TABLE OF CONTENTS

MOWERS

2	T Series
4	GR Series
6	Z200 Series
8	Z400 Series
10	Z700 Series
12	SZ Series
14	W Series
16	ZG200 Series
18	ZG300 Series
20	ZD1000 Series
22	ZD1200 Series
24	ZD1611 Series
26	F Series
28	Kubota Services



MOWERS



T Series

T2290KW | T2290KWT

	T2290KW	T2290KWT
Engine Type	OHV, air-cooled, gasoline, 2-cylinder, V-twin	
Engine Model	Kawasaki FR651V	
Horsepower (gross)	21.5**	
Transmission	Hydrostatic	
Fuel Capacity (gal.)	3.6	
Speed (mph) (forward)	0-5.7	0-6.7
Overall Length	75.2"	
Deck Size	42"	48"
Overall Width (w/o mower)	39.8"	
Weight (lbs.)	622	661

ADDITIONAL IMPLEMENTS AND ACCESSORIES

Armrest Kit	Standard	
Grass Catcher (blower not necessary)	GCK42-90T	GCK48-90T
Mulching Kit	T2832	T2838
Front Push Blade (48")	T2833	
Two-Stage Snowblower (46")	T2834	

Easy to operate, fun to drive, the Kubota T Series is durable, and packed with premium features to keep you mowing efficiently and comfortably.

- > Equipped with a high performance 21.5-horsepower Kawasaki Engine
- > All models are equipped with hydrostatic transmissions (HST) for precise control
- > High-back seat provides extra cushioning and support, with dual armrests for comfort
- > The thicker and higher-positioned steering wheel helps to reduce fatigue and enhances operator comfort and control
- > Convenient 12V power outlet lets you charge your phone or power accessories like an air compressor
- > Short 14" turning radius allows easy maneuvering around difficult objects
- > Mower height adjusts from 1" to 4" right from the operator's seat with simple dial-cam setting
- > Upgraded fabricated mower deck, along with new tubular-frame structure, improves strength, rigidity, and durability
- > Ductile cast iron front axle is strong and durable, handling all sorts of bumps & shocks
- > Compatible with a full line of performance-matched, quick-attach front implements

MID-MOUNT MOWER SPECIFICATIONS		
	RCK42P-90T	RCK48P-90T
Number of Blades	2	3
Cutting Width	42"	48"
Cutting Height	1-4"	
Height Adj. Increments	1/4"	
Lift System	Manual w/ gas assist	



MOWERS



GR Series GR2020G | GR2120

With Kubota's revolutionary Glide Steer[®], all-wheel drive, plus tight turning, even difficult mowing conditions are now effortless.

- › Your choice of a 3-cylinder, 17-horsepower Kubota diesel engine or a 2-cylinder, 20-horsepower Kohler gasoline engine
- › Glide Steer[®] provides excellent turning maneuverability with front wheels that turn up to 70 degrees while helping to prevent turf damage
- › All-wheel drive (AWD) characteristics provide outstanding traction needed for mowing on rolling terrain
- › Versatile HST transmission is controlled by a single foot pedal for a smooth and comfortable ride
- › Shaft-driven mower, transmission, and PTO offer smooth, virtually trouble-free operations
- › Cruise control, full-flat operator platform and a comfortable high-back, adjustable suspension seat increase operator comfort
- › 5" deep, 48" and 54" contoured design mower decks are able to produce professional results
- › Equipped with Kubota's Reverse Awareness System (KRA) for additional safety when mowing in reverse
- › Variety of implements available for year-round versatility, including a grass catcher, two-stage snowblower, front blade, and mulching kit

GR Series

	GR2020G	GR2120
Engine Type	Air-cooled, gasoline, 2-cylinder	Liquid-cooled, diesel, 3-cylinder
Engine Model	Kohler	Kubota
Horsepower (gross)	20.5*	17**
Transmission	Hydrostatic	
Steering System	Glide Steer, hydrostatic power steering	
Deck Size	48"	48" / 54"
Overall Length	77.2"	
Overall Width (w/ mower)	61" (w/48")	66.9" (w/54")
Weight (lbs.) (w/ mower)	871 (w/48")	970 (w/54")

ADDITIONAL IMPLEMENTS AND ACCESSORIES

Front Blade	48"
Grass Catcher	3-bag, 10-bushel capacity
Mulching Kit	Optional
Snowblower	2-stage 46"
Rear Weight Bracket	Optional
Suitcase Weights	Optional

MOWER SPECIFICATIONS

	RCK48-GR	RCK54-GR
Number of Blades	3	
Cutting Width	48"	54"
Cutting Height	1-4"	
Height Adj. Increments	1/4"	
Lift System	Hydraulic	

* SAE J1940; ** SAE J1995



MOWERS



Z200 Series

Z232KW-42 | Z242KH-48 | Z242KW-48 | Z252KH-54 | Z252KW-54

The ultimate residential zero-turn mower — combining style, comfort, and performance.

- › K-Ride® comfort system provides enhanced comfort (features may vary)
- › Adjustable suspension seat standard on KW 48" & 54" models, optional on KH models
- › Folding ROPS standard on KW 48" & 54" models, optional on KH models
- › A 10-gauge steel, welded mower deck provides exceptional cutting performance for homeowners
- › Push button start allows for easy one-handed starting
- › Covered storage box keeps things out of the weather and safe
- › Convenient cup holders keep your drinks at hand
- › Wide-tread tires give you better traction and weight distribution to help protect your lawn
- › The K-Lift (mechanical one-push deck-lift pedal) makes adjusting the cutting height simple
- › Z232KW comes with a 42-inch deck to maneuver in and out of intricate spaces smoothly and with ease
- › Zero-turn steering for superior machine control and precision mowing
- › The Z200 series is covered by a limited four-year, 300-hour factory warranty

Z200 Series

	Z232KW-42	Z242KH-48	Z252KH-54	Z242KW-48	Z252KW-54
Engine Type	Air-cooled, gasoline, V-Twin				
Engine Model	Kawasaki FR	Kohler 7000		Kawasaki FR	
Horsepower (gross)	21.5*	22**	25**	21.5**	24**
Displacement (cu. cm.)	726	725	747	726	
Transmission	Hydro-Gear™ Commercial ZT2200 Integrated Zero-Turn Transaxle	Hydro-Gear™ Commercial ZT3100 Integrated Zero-Turn Transaxle			
Fuel Tank Capacity (gal.)	3.6	4.3			
Speed (mph) (forward/reverse)	0–6.5 / 0–4	0–8 / 0–4			
Overall Length	74.4"	79.0"			
Overall Width (w/ mower chute down)	55.1"	61.1"	67.3"	61.1"	67.3"
Overall Height	66.7"	73.0" Fixed ROPS		68.4" Foldable ROPS	
Wheel Base	48.7"	47.0"			
Weight (lbs.)	643	811	827	844	860

MOWER SPECIFICATIONS

Mower Deck Type	Pro performance fabricated deck				
Mower Lift System	Mechanical				
Mower Height, Increment	1.5–4.25", 1/4"	1.5–4.5", 1/4"			
Mower Deck Width	42"	48"	54"	48"	54"
Blade Tip Speed (fpm)(max):	17,700	18,100			

IMPLEMENTS AND ACCESSORIES

Grass Catcher	Optional				
Mulching Kit	Optional				
Seat Suspension Kit	N/A	Optional		Standard	
LED Working Light Kit	Optional				
Canopy Sunshade & Deck Lift Assist Kit	N/A	Optional			
Arm Rest Kit	Optional	N/A			
Hitch Kit	Optional	N/A			

* These Kawasaki engines have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, and certified by SAE International. The gross power ratings of these engines were determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified, determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

** Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 or J2723 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions and other factors. The gross engine horsepower information is for comparison purposes only.

MOWERS



Z400 Series

Z412KW | Z422KW | Z422KWT | Z411KW | Z421KW | Z421KWT
Z452KWI | Z452KWT

Designed for the user who seeks professional performance and durability, as well as comfort and convenience.

Z412 and Z422 Features

- › Premium 22" high back 3" suspension seat offers thick cushion with high back and a 4" adjustable seat slide that improves comfort and reduces fatigue
- › Suspension seat is standard on the Z412, Z422, and the Z452 models
- › Powered by Kawasaki FS and FT Series Engines, the Z400 provides the torque you need to power through tall, tough grass conditions
- › The Z400 is driven by the dependable and durable Hydro-Gear ZT-3600 transmission
- › Maximum forward travel speed of 10 mph contributes to quickly completing the job at hand
- › A generous fuel tank capacity of 6.8 U.S. gallons (25.7 L)
- › Smooth patented weighted control lever operation with dampers that have three adjustment positions (weighted control levers not available on Z411 or Z421 models)
- › All deck sizes have 13"x6.5"-6" front pneumatic tires
- › The Z411, Z412, Z421 and Z422 have the pneumatic front caster tires. Z452 has semi-pneumatic front caster tires.
- › Simple operation of the mower lift pedal efficiently raises the mower deck
- › The operation panel is conveniently and integrally located on the right fender and features a simple, easy-to-operate design
- › Convenient 12V power outlet lets you charge your phone or power accessories like an air compressor
- › The seat features a thick cushion construction and the seat slides a full 4" travel forward and back, allowing even prolonged operations to be undertaken in maximum comfort (Z411 & Z421)

Z400 Series

	Z412KW-48 Z411KW-48	Z422KW-54 Z421KW-54	Z422KWT-60 Z421KWT-60	Z452KWi-54	Z452KWTi60
Engine Type	Air-cooled, gasoline, 2-cylinder			EFI - Air cooled V-twin vertical crank shaft gasoline engine	
Engine Model	Kawasaki FS 651V	Kawasaki FS 730V		Kawasaki FT 730V EFI	
Horsepower (gross)*	22	24		26	
Displacement (cu. cm.)	726				
Transmission	Hydro-Gear ZT-3600				
Front Tire	13" x 6.5" -6" (Z412 & Z422) 13" x 5" x 6"			13 x 6.5-6 Semi-pneumatic	
Fuel Capacity (gal.)	6.8				
Speed (mph) (forward/reverse)	0-10 / 0-5				
Overall Length	48.7"		54.2"		80.9
Overall Width (w/ mower chute)	61.1"	67.3"	73.6"	67.3	73.6
Overall Height (w/ROPS upright)	69.8"				
Weight (lbs.) (w/ mower)	856	870	904	954	988

MOWER SPECIFICATIONS

	RCK48P-400Z	RCK54P-400Z	RCK60P-400Z	RCK54P-400Z	RCK60P-400Z
Mower Deck Type	Kubota Side Discharge				
Mower Lift System	Mechanical / Foot pedal				
Deck Depth	5"				
Cutting Height	1.5-5", 1/4"				
Cutting Width	48"	54"	60"	54"	60"
Blade Tip Speed (fpm) (max.)	18880	18700	18300	18700	18300

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	Z400 Series
Grass Catcher Kit	Optional
Mulching Kit	Optional
Chute Block Kit	Optional
Suspension Seat Kit	Optional
LED Work Light Kit	Optional
Operator Controlled Discharge Chute	Optional
Canopy Sunshade	Optional
Maintenance Lift Kit	Optional

* SAE J1995

These Kawasaki engines have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, and certified by SAE International. The gross power ratings of these engines were determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified, determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 or J2723 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions and other factors. The gross engine horsepower information is for comparison purposes only.

MOWERS



Z700 Series

Z781KWiTW | Z751KWi | Z781KWi | Z781KWiTi Z724XKW |
Z726XKW | Z723KH | Z724KH | Z725KH

Designed for the commercial landscape professional, the Z700 Series offers performance, productivity, comfort and the durability that Kubota is known for.

Z781KWiTW

- › Airless (Tweel) tires now standard on 54" and 60" models

Z700EFI Model Features

- › Kawasaki FX EFI engines feature a fully integrated electronic governor (E-GOV) and a cutting edge ECU control unit. They deliver outstanding performance without power loss
- › EFI dial throttle control delivers effortless engine control
- › LCD engine meter provides all the information you need to keep your Z700 EFI unit running at optimum efficiency
- › Equipped with 24" low profile tires
- › 12V Power outlet can charge or power many devices

All Model Features

- › Premium adjustable suspension seat offers a thick cushion with a 21.2" high back 3" suspension seat with 6" adjustable seat slide that allows you to find the ideal seating position for maximum comfort
- › New deck step indicator provides easier access
- › New water and dust proof safety switches help to reduce failures
- › 6"-deep mower deck and anti-scalp rollers help to provide fast, clean, superior grass-cutting performance
- › With an 11.2 mph maximum speed, it's Kubota's fastest zero-turn mower
- › Dual Parker transmission with an integrated pump and motor designed for increased efficiency and simplified maintenance

Z700 Series

	Z781KWi-54 Z781KWTi-60 Z781KWITW						
	Z751KWi-48	Z724XKW-3-48	Z724XKW-3-54	Z726XKW-3-60	Z723KH-3-48	Z724KH-3-54	Z725KH-3-60
Engine Type	Air-cooled, gasoline, V-Twin						
Engine Model	Kawaski FX 730V EFI	Kawaski FX 850V EFI	Kawasaki FX FX 730V	Kawasaki FX FX 801V	KOHLER Command Pro® CV682	KOHLER Command Pro® CV732	KOHLER Command Pro® CV742
Horsepower (gross)	25.5*	29.5*	23.5*	25.5*	22.5**	23.5**	25**
Displacement (cu. cm.)	726	852	726	852	694	694	747
Transmission	Parker HTG14						
Fuel Capacity (gal.)	11.6						
Speed (mph) (forward/reverse)	0–11.2 / 0–5.6						
Overall Length	83.9"						
Overall Width (w/ mower)	61.3"	67.3"/ 73.8"	61.3"/ 67.3"	73.8"	61.3"	67.3"	73.8"
Overall Height (w/ ROPS upright)	70.1"						
Wheel Base	50.9"						
Weight (lbs.) (w/ mower)	1,215	1,254/1,285	1,207/1,223	1,276	1,212	1,226	1,257

MOWER DECK SPECIFICATIONS

Mower Deck Type	Commercial fabricated deck						
Mower Deck Width, Lift System	48" Mechanical	54"/60" Mechanical	48" / 54" Mechanical	60" Mechanical	48" Mechanical	54" Mechanical	60" Mechanical
Cutting Height	1–5"						
Height Adj. Increments	1/4"						
Mower Deck Depth	6"						
Blade Tip Speed (fpm) (max):	18,600	18,400 / 18,600			18,600		

IMPLEMENTS AND ACCESSORIES

Premium Suspension Seat	Standard
Grass Catcher	Optional – 10 bushels (48" / 54"), 11 bushels (60")
Mulching Kit	Optional
Operator-Controlled Discharge Chute	Optional
Towing Hitch	Optional
LED Working Light Kit	Optional
Maintenance Lift Kit	Optional
Canopy Sunshade	Optional
Karu Mulching Blade	Optional, 60" only

* SAEJ1995

These Kawasaki engines have been tested in accordance with SAE J1995, verified by TÜV Rheinland Group, and certified by SAE International. The gross power ratings of these engines were determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified, determined by using measurements according to SAE J1995 which were witnessed by SAE-approved witnesses from TÜV Rheinland Group. Torque ratings of these engines were not certified by SAE. Actual power and torque output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

** SAE J1940

Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 or J2723 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions and other factors. The gross engine horsepower information is for comparison purposes only.

MOWERS



SZ Series

SZ19NC-36-2 | SZ22NC48-2 | S26NC-52-2 | SZ26NC-61-2

The Kubota SZ series commercial stand-on is the answer to get more done, faster and more efficiently, in even the tightest spaces while delivering superior comfort and durability.

All Models

- › Commercial-grade Kawasaki FX & FT EFI gas engines equipped with Hydro-Gear integrated transmissions
- › Adjustable front baffle on cutting decks (on 48", 52" and 61")
- › Smooth 3-position adjustable dampened controls
- › Tool-less adjustable front reference bar
- › Large operator platform (48", 52" and 61" models)
- › Tool-less tracking adjustment
- › Ergonomic cushion pad
- › No-flat front castors

SZ Series

	SZ19NC-36-2	SZ22NC-48-2	SZ26NC-52-2	SZ26NC-61-2
Engine Type	Kawasaki FX600V	Kawasaki FX691V	Kawasaki FT730V-EFI	
Horsepower (gross)*	19 HP	22 HP	26 HP	
Transmission	Hydro-Gear ZT3100	Hydro-Gear ZT3600		
Speed	9 MPH	11 MPH		
Fuel Capacity (gal.)	5.1	6.5		
Deck Type	Fabricated Floating			
Deck (ga)	7 ga top and side skirts w/ 3 ga reinforcement	10 ga top and 7 ga side skirts w/ 3 ga reinforcement w/ adjustable front baffle (on -2 models)		
Deck Spindle & Bearings	1" Shaft w/ Maintenance-Free Seal Bearings			
Deck Size	36"	48"	52"	61"
BladeTip Speed (fpm)	17,950	17,773	18,585	18,850
Cutting Height	Adjustable 1.5" - 4.5"			
Front Tires (Flat-Free)	11" x 6"-5"	13" x 6.5"-6"		
Rear Tire	20" x 8"-10"	23" x 8.5"-12"	23" x 10.5"-12"	
Weight (lbs.)	800	961	991	1,028
Length	64"			
Height	45"	45.75"		

ATTACHMENTS

Mulch Kit	SMK36	SMK48-2	SMK52-2	SMK61-2
Discharge Plate	SBP36	SBP48-2	SBP52-2	SBP61-2
Weight Kit	SWK36	SWK48		
Striping Kit	N/A	SSK48	SSK52-61	
Deck Lift Assist	N/A	SZLA01		
Accelerator Grass Catcher 1	SGC61			

* SAEJ1995



MOWERS



W Series

WHF14NC-36-2 | WHF15NC-48-2 | WHF19NC-52-2

Kubota's durable Commercial Walk-Behind Mowers offer options for all commercial mowing, small and large.

WHF14NC-36-2 / WHF15NC-48-2 / WHF19NC-52-2

- › The ergonomic handle design and intuitive control layout keep operators mowing confidently and comfortably
- › All models use commercially proven Kawasaki FS-series engines to deliver reliable performance and superior durability
- › The durable Hydro-Gear ZT-2800 hydrostatic transaxles deliver smooth and simple operation with ground speeds of up to 6.5 mph
- › The large rear wheels provide ample ground clearance to enable smooth, easy maneuverability on all types of terrain
- › The dependable cutting decks are equipped with steel-fabricated spindle assemblies and welded baffle systems
- › Easy to maintain features include a tool-less oil drain, a handy external oil filter location and easy battery access

Walk-Behind Mowers

	WHF14NC-36-2	WHF15NC-48-2	WHF19NC-52-2
Engine Type	Kawasaki FS481V	Kawasaki FS541V	FS600V Kawasaki
Horsepower (gross)*	14.5	15	18.5
Fuel Capacity (gal.)	5		
Speed (mph)	6.5		
Transmission	Hydro-Gear ZT-2800 transmissions		
Mower Deck Type	Fabricated Floating Deck with Wear Band		
Deck (ga)	10 ga deck with 10 ga top and 7 ga skirts		
Blade Tip Speed (fpm)	18,127	16,832	18,645
Cutting Height	1.5" - 4.5"		
Starter	Electric		
Hand Controls	Ergonomic Bull Horn		
Deck Spindle	Maintenance-free with 1" shaft		
Spindle Bearings	Precision-ground double-sealed bearings		
Deck Drive	Warner Mag Stop 105 ft-lb electric clutch		
Front Tires	11" x 6"-4" No-Flat		
Rear Tires	20" x 6.5" - 8"	20" x 8" - 8"	
Brakes	(-2) Hydrostatic Dynamic Braking		
Weight (lbs.)	774	789	832
Length	78"		
Height	40.3"	43"	

* SAE J1995

MOWERS



ZG200 Series ZG222 | ZG227

The professional-quality performance, exceptional comfort, and outstanding reliability of the ZG200 Series make it the ultimate mowing machine for both professionals and homeowners.

- › Powered by durable 21.1- and 26-horsepower air-cooled Kubota gasoline engines
- › Zero-turn steering for superior navigation
- › Reliable, ultra-smooth, hydrostatic transmission offers superior durability and performance
- › Heavy-duty Pro Commercial Mower Deck features a unique baffle system that discharges grass clippings for professional looking results
- › Optional mulching system provides a beautiful finish, even in thick grass
- › Foot-operated hydraulic deck-lift system for easy adjustment
- › Spacious platform, comfortable and supportive seating, and an easy-to-reach cup holder for operator comfort
- › Operator-friendly instrument panel puts everything within close reach
- › Convenient mower, HST, and engine access for hassle-free maintenance
- › Foldable ROPS standard

ZG200 Series

	ZG222-48	ZG227-54/60
Engine Type	Kubota air-cooled, gasoline, 2-cylinder	
Engine Model	Kubota KGZ770-M3	Kubota KGZ770-M2
Horsepower (gross)*	21.1	26
Displacement (cu. cm.)	768	
Transmission	2-HST w/gear reduction	
Fuel Capacity (gal.)	7.1	
Speed (mph) (forward/reverse)	0–9 / 0–5	
Overall Length	82.5"	82.5" / 83.7"
Overall Width (w/ mower chute)	61"	67.3" / 75.2"
Overall Height (w/ROPS upright)	69.9"	
Overall Height (w/ROPS folded)	52.8"	
Weight (lbs.) (w/ mower)	1,168	1,190 / 1,235

MOWER SPECIFICATIONS

	ZG222-48	ZG227-54/60
Mower Deck Type	Welded, side discharge	Welded, side discharge
Mower Deck Width / Lift System	48" / Hydraulic	54 or 60" / Hydraulic
Cutting Height	1–5"	
Height Adj. Increments	1/4"	
Mower Deck Depth	6" (48)	6"

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	ZG200 Series
Canopy Sunshade	Optional
Grass Catcher	Optional
Mulching Kit	Optional
Working Light Kit	Optional

* SAE J 1940

MOWERS



ZG300 Series ZG327P | ZG327RP

Built for power, durability, and performance, the ZG300 Series features deep mower decks for exceptional cutting performance.

- › ZG300 mowers are available with durable Kubota air-cooled gasoline engines with 26 gross horsepower
- › Durable HST transmission optimizes performance to achieve maximum results
- › Pro Commercial Deck is a superior deep mower deck that helps to ensure excellent cutting performance
- › Anti-scalp swivel rollers can rotate a full 360 degrees helping to prevent unsightly turf damage
- › Large-capacity dual fuel tanks on ZG300 Series models
- › Foot-controlled hydraulic deck lift and PTO wet disc clutch
- › Unique maintenance lift system allows easy mower access (optional on ZG300 models)
- › Tie-down for securing onto flatbed truck or trailer for convenient transportation
- › “Flat-free” front caster tires are standard with ZG300 and enable mowing operation without worrisome flat-tire downtime

ZG300 Series
**ZG327P-60
ZG327RP-60R**

Engine Type	Kubota air-cooled, gasoline, 2-cylinder
Engine Model	Kubota KGZ770
Horsepower (gross)*	26
Displacement (cu. cm.)	768
Transmission	2-HST w/gear reduction
Fuel Capacity (gal.)	12.7
Speeds (mph) (forward/reverse)	0–10.6 / 0–5.3
Overall Length	87.8"
Overall Width (w/ mower)	75.2"
Overall Height	75.4"
Weight (lbs.)	1,565

MOWER SPECIFICATIONS

Mower Deck Type	Welded, side, or rear discharge
Mower Deck Width / Lift System	60" / Hydraulic
Mower Height / Increment	1–5" / 1/4"
Mower Deck Depth	6.5"

ADDITIONAL IMPLEMENTS AND ACCESSORIES
ZG300 Series

Canopy Sunshade	Optional
Front Utility Blade	Optional
Grass Catcher**	Optional
Mulching Kit	Optional
Spark Arrester	Optional
Striping Kit	Optional
Working Light Kit	Optional
Karu Mulching Blade	Optional

* SAE J 1940

MOWERS



Product may be shown with optional equipment

ZD1000 Series ZD1011 | ZD1021

Top to bottom, front to back, and inside and out, Kubota's ZD Series of zero-turn mowers is engineered for quality. Versatile and reliable, the ZD1000 compact mower can handle jobs big and small.

- › The Kubota ProDeck with ACS (Aerodynamic Cutting System®) delivers professional looking results, meaning you can get the job done better and faster
- › Redesigned clean-cut blades have a new shape that improves overall load balance and provides a longer service life
- › Discharge chute has been redesigned with a flexible yet strong material, to help ensure a smoother and more uniform discharge of clippings
- › Improved fuel efficiency — up to 22% better
- › Low center of gravity provides stability on slopes and uneven ground
- › A two-pedal hydraulic deck-lift system lets you easily raise and lower the deck with your foot

ZD1000 Series

	ZD1011-48 / ZD1011-54	ZD1021-60
Engine Type	Kubota liquid-cooled, diesel, 3-cylinder	
Engine Model	Kubota D782-E4-ZD-3	Kubota D902-E4-ZD-2
Horsepower (gross)*	19.3	21.6
Displacement (cu. cm.)	778	898
Transmission	2-HST w/gear reduction	
Fuel Capacity (gal.)	6.0	
Speed (mph) (forward/reverse)	0-9 / 0-5	
Overall Length	87.8"	88.8"
Overall Width (w/ mower chute)	61.6" / 67.3"	73.8"
Overall Height (w/ ROPS upright)	74.4"	
Front Tires	13 x 5.0-6 smooth pneumatic	13 x 6.5-6 smooth pneumatic
Rear Tires	24 x 9.5-14 low-profile tire	24 x 12.0-14 low-profile tire
Brakes	Wet multi-discs, foot applied, released	
Weight (lbs.) (w/ mower)	1,296 / 1,323	1,389

MOWER DECK SPECIFICATIONS

	RCK48P-1000Z	RCK54P-1000Z	RCK60P-1000Z
Mower Deck Type	Kubota ProDeck with ACS		
Mower Lift System	Hydraulic		
Deck Depth	6"		
Cutting Height	1-5"		
Cutting Width	48"	54"	60"
Blade Tip Speed (fpm) (max.)	17100		18200

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	ZD1011-48 / ZD1011-54	ZD1021-60
"Catch All" 2-Bag Style Grass Catcher	Optional	
Hitch Kit	Optional	
Operator-Controlled Discharge Chute	Optional	
Work Light Kit	Optional	
Canopy Sunshade	Optional	

* SAE J1995



ZD1200 Series

ZD1211 | ZD1211R | ZD1211L | ZD1211RL

With a bigger engine and wider mower deck, the ZD1200 gets the job done with speed and efficiency. These premium mowers incorporate the best of Kubota's advanced technology in every detail and it helps to ensure both superior mowing performance and supreme operator comfort.

- › The large LCD meter shows all of the key indicators you need to maximize cutting performance and operability
- › For faster operation and better ergonomics, the mower deck controls are on the right side within easy reach of your hand, letting you quickly and easily adjust the cutting height
- › Equipped with low profile tires
- › Redesigned HST levers not only provide more legroom but more settings to choose from, to help ensure smoother operation, better zero-turn maneuverability, and greater job efficiency
- › A more comfortable, fully padded and reclining bucket seat means less operator fatigue and greater productivity — with dual adjustable armrests, higher backrest, and lumbar support
- › The optional “Catch All” hopper-style grass catcher holds 11.4 bushels of clippings and can be emptied while the operator remains seated

ZD1200 Series

	ZD1211-60 / ZD1211R-60R	ZD1211L-72 / ZD1211RL-72R
Engine Type	Kubota liquid-cooled, diesel, 3-cylinder	
Engine Model	Kubota D1105-E4-ZD-2	
Horsepower (gross)*	24.8	
Displacement (cu. cm.)	1,123	
Transmission	2-HST w/gear reduction	
Fuel Capacity (gal.)	13.0	
Speed (mph) (forward/reverse)	0–10.6 / 0–5.3	
Overall Length	89"	93.7"
Overall Width (w/ mower chute)	73.8" / 63"	85.8" / 75.2"
Overall Height (w/ROPS upright)	78.7"	
Front Tires	15 x 6.5-8 smooth semi-pneumatic	
Rear Tires	26 x 12.0-16 low-profile tire	
Brakes	Wet multi-discs, foot applied, released	
Weight (lbs.) (w/ mower)	1,687 / 1,720	1,764 / 1,786

MOWER DECK SPECIFICATIONS

	RCK60P-1200Z	RCK60RP-1200Z	RCK72P-1200Z	RCK72RP-1200Z
Mower Deck Type	Kubota ProDeck with ACS	Kubota ProDeck	Kubota ProDeck with ACS	Kubota ProDeck
Mower Lift System	Hydraulic			
Deck Depth	6.0"	5.5"	6.0"	5.5"
Cutting Height	1–5"			
Cutting Width	60"		72"	
Blade Tip Speed (fpm) (max.)	18,050	16,900	18,050	18,000

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	ZD1211-60 / ZD1211-60R	ZD1211L-72 / ZD1211RL-72R
“Catch All” Hopper-Style Grass Catcher	Optional	
“Catch All” 2-Bag Style Grass Catcher	Optional	
Karu Mulching Blade	Optional, 60" & 72"	
Hitch Kit	Optional	
Operator-Controlled Discharge Chute	Optional	
Work Light Kit	Optional	
Canopy Sunshade	Optional	

* SAE J1995

MOWERS



ZD1611 Series

ZD1611RL | ZD1611LF | ZD1611RFL

The ZD1611 stakes its place at the top of the line of Kubota's diesel zero-turn mowers with the electronically controlled Kubota diesel engine and the Aerodynamic Cutting System® to significantly enhance cutting performance.

- › The flexible discharge chute helps to ensure superior scattering of clippings
- › Wider, thicker, and more durable blades contribute to optimized air flow
- › Compared to previous model the ZD1611 features an enlarged flywheel that is responsible for an increase from 29.1 hp (21.7 kW) to 30.8 hp (23 kW)
- › The hydraulic transmission, a unique Kubota feature, ideally complements the V1505 Kubota diesel engine
- › The 3.5" (88.9 mm) wide LCD Panel provides machine diagnostics and machine performance indicators
- › Two-pedal type hydraulic lift system enables the operator to easily raise the mower deck when an obstacle is encountered
- › Operators do not need to remove hands from levers to engage the parking brake through use of the conveniently located parking brake pedal
- › The simple and easy to use two-pin type maintenance lift allows for quick access to the mower deck making maintenance a breeze

ZD1600 Series

	ZD1611RL-60R	ZD1611LF-72 / ZD1611RLF-72R
Engine Type	Diesel, liquid-cooled (4cyl.) with DPF	
Engine Model	Kubota V1505-CR-TE5-ZD1	
Horsepower (gross)*	30.8	
Displacement (cu. cm.)	1,498	
Transmission	2-HST w/gear reduction	
Fuel Capacity (gal.)	13.0	
Speed (mph) (forward/reverse)	0–10.6 / 0–5.3	
Overall Length	105.7"	
Overall Width (w/ mower chute)	63"	85.8" / 75.2"
Overall Height (w/ROPS upright)	78.7"	
Front Tires	15 x 6.5-8 smooth semi-pneumatic	
Rear Tires	26 x 12.0-16 low-profile tire	
Brakes	Wet multi-discs, foot applied, released	
Weight (lbs.) (w/ mower)	2,105	2,094 / 2,105

MOWER DECK SPECIFICATIONS

	RCK60RP-1500Z	RCK72P-1500Z	RCK72RP-1500Z
Mower Deck Type	Kubota ProDeck	Kubota ProDeck with ACS	Kubota ProDeck
Mower Lift System	Hydraulic		
Deck Depth	5.5"	6.0"	5.5"
Cutting Height	1–5", 1/4"		
Cutting Width	60"	72"	
Blade Tip Speed (fpm) (max.)	17,200	18,300	

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	ZD1611RL	ZD1611LF	ZD1611RFL
Mulch Kits	Optional		
Work Light Kit	Optional		
Canopy Sunshade	Optional		
Operator Controlled Discharge Chute (OCDC)	N/A	Optional	N/A
Karu Mulching Blade	Optional, 72"		

* SAE J1995

MOWERS



F Series F2690E | F2690 | F3710

The F Series sets a new standard for professional front-mount mowers with cleaner emissions and greater power, precision, and efficiency.

- › Kubota diesel engines provide fast, and efficient job performance with high-torque rise that allows you to power through tall or wet grass
- › The F3710 offers the highest-ever horsepower among all Kubota front-mount mowers
- › 6" deep, side-discharge deck design lets tall grass stand up so it can be cut more easily with a cleaner appearance
- › Large operator's platform, deluxe high-back seat with four separate adjustments and operator levers, for maximum driving comfort and convenience
- › Hydrostatic power steering reduces operator fatigue and makes it easier to mow around trees and other obstacles

F Series

	F2690E	F2690	F3710
Engine Type	Kubota liquid-cooled, diesel, 3-cylinder		Kubota liquid-cooled, diesel, 4-cylinder
Engine Model	Kubota D1105		Kubota V1505-CR-TE5-FM2
Horsepower (gross)*	24.8		36.9
Displacement (cu. cm.)	1,123		1,498
Transmission	Hydrostatic, 2-range		
Fuel Capacity (gal.)	16.1		
Speed (mph) (forward/reverse)	0-12 / 0-6.2	0-12.4 / 0-6.8	
Overall Length	96.5"		99.6"
Overall Width	48.8"	53.9"	
Overall Height	77.8"	78.1"	
Min. Ground Clearance	6.9"	7.3"	
Weight (lbs.)	1,559	1,590	1,872

MOWER SPECIFICATIONS

	RCK60P-F39	RCK72P-F39	RCK60R-F36	RCK72R-F36
Mower Deck Type	Welded, side discharge		Welded, rear discharge	
Cutting Width	60"	72"	60"	72"
Cutting Height	1-5", 1/4"			
Mower Deck Depth	6"		5.5"	

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	F2690E	F2690	F3710
Hard Cab Enclosure		Optional	
Cab Heater		Optional	
Grass Catcher 12-Bushel, Low-Dump Style		Optional	
Debris Blower		Optional	
60" Front Blade		Optional	
60" Rotary Sweeper		Optional	
Snow Blower		Optional	
Mulching Kit		Optional	

* SAE J1995

KUBOTA SERVICES

KUBOTA GENUINE PARTS

Kubota provides customers parts support, parts, and manuals through Kubota's national dealer network. We support our dealers with four large warehouses located strategically throughout the United States.

Kubota Genuine Parts is a full line of O.E.M. and maintenance parts designed and engineered to original factory specifications to keep your Kubota equipment operating at peak performance.

KUBOTA ORANGE PROTECTION PROGRAM®

The Kubota Orange Protection Program gives you the opportunity to extend your coverage, without interruption, by one or two years. You can purchase your warranty extension through your Kubota dealer any time before the expiration of the regular Kubota Limited Warranty.¹

BENEFITS AT A GLANCE

- > Comprehensive coverage
- > Protects your investment
- > Provides peace of mind
- > Reliability of genuine Kubota parts
- > Extends both the Basic and applicable Power Train coverage
- > Administered by Kubota Tractor Corporation
- > Sold and serviced by your authorized Kubota Extended Warranty dealer
- > Financing available, if purchased at the same time as your tractor
- > No deductibles
- > Fully transferable

FOR MORE INFORMATION:

VISIT YOUR LOCAL KUBOTA DEALER OR CALL 888-398-9782

KUBOTA CREDIT CORPORATION, U.S.A.

Since 1982, Kubota has extended a wide range of financing alternatives to customers through Kubota Credit Corporations, U.S.A. (KCC). KCC offers competitive interest rates, flexible down payments, monthly and seasonal payment terms, and a Kubota-sponsored property damage insurance program. Kubota dealers can tailor a variety of finance programs² to meet the specific requirements of their customers.

FOR MORE INFORMATION, VISIT YOUR LOCAL KUBOTA DEALER OR WWW.KUBOTACREDITUSA.COM

¹ - Orange Protection is available in Florida for Commercial Customers only.

² - Subject to credit approval through Kubota Credit Corporation, U.S.A.



**KUBOTA-BACKED, NO DEDUCTIBLE
EXTENDED WARRANTY SOLUTION**

Kubota®
GENUINE PARTS

KTAC INSURANCE AGENCY

Created specifically for Kubota customers, KTAC Insurance is a Kubota-endorsed physical damage insurance program providing “all risk” protection.*

BENEFITS AT A GLANCE

- › Coverage against flood, wind, infestation, upset and collision, falling objects, theft, fire, vandalism, and more
- › In-transit and off-property protection
- › Low \$250 deductible
- › Convenient payment options
- › Transportation reimbursement

KCC customers also receive original sales price protection (including taxes and fees)** for the first 60 months of the finance agreement.

FOR MORE INFORMATION, CONTACT A KTAC REPRESENTATIVE AT 800-348-5802 OR VISIT WWW.KTACINSURANCEAGENCY.COM.

* See policy for details

**This is a summary of the Kubota-Endorsed Property Damage Insurance Program. This information is descriptive only and is not intended to be a solicitation or an offer to sell any insurance product or service, nor is the information a complete description of all of the terms, conditions and exclusions applicable. Actual coverage is subject to the language of the policy issued. This policy is underwritten by Ohio Indemnity Company.

KUBOTA LEASING

In this credit-tight economy, leasing is critical to getting the Kubota equipment your business needs to grow. With the new Kubota Leasing program, commercial customers have access to flexible leasing that makes the full Kubota product line more affordable.


PROGRAM HIGHLIGHTS INCLUDE:

- › Affordable monthly payments
- › Fast, easy application process
- › Application only required up to \$150,000
- › Same-day credit decisions with complete information
 - › Transactions starting at \$3,000 and up
 - › 24-, 36-, 48- or 60-month terms
- › Flexible structures to match your cash flow and budget

Download the myKubota app and see all compatible attachments for your unit

Find Kubota performance matched implements & attachments to go along with your unit directly in the myKubota app.

Scan to download now

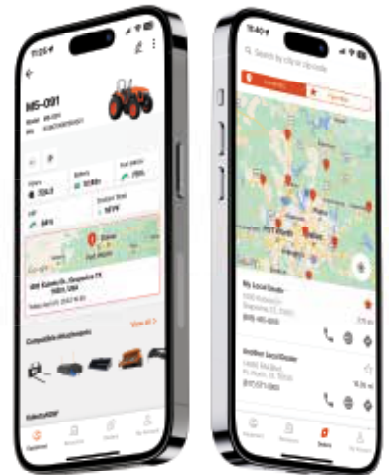

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.



KUBOTA TRACTOR CORPORATION

1000 Kubota Drive
Grapevine, TX 76051
KubotaUSA.com



This brochure is for descriptive purposes only. Please contact your local Kubota dealer for warranty and safety information. See dealer for details.
77700-13569 Rev. 2-25 Turf Full Line Brochure | © 2025 Kubota Tractor Corporation