



Kubota



**2026 FULL LINE
BROCHURE**



COMPANY PROFILE

HARD-WORKING KUBOTA TOOLS TO HELP YOU GET MORE DONE

For more than 50 years, Kubota has stood with the people who shape the land we all live on—the people who take pride in owning it, working it, and building something greater from it. We understand that anything worth doing is worth doing right, and we design every piece of equipment with that belief at its core.

Whether you're maintaining a two-acre yard, managing a 2,000-acre ranch, harvesting hay, overseeing a fleet, or taking on a new project around the farm, Kubota equipment is built to give you the strength, comfort, and confidence to handle what's ahead. Our signature orange machines deliver the performance, reliability, and precision you need—helping you move your world forward one job at a time.

From utility vehicles and mowers to tractors, hay tools, and a full range of construction equipment, our comprehensive lineup is engineered for the people who use what they have to build something better. Every solution is crafted to support real work and real progress—not just for today, but for years and generations to come.

This brochure offers a complete look at our trusted favorites and our newest innovations, all designed to meet your needs on your terms. Because at Kubota, progress isn't just about equipment—it's about empowering you to do the work that matters.

Explore the possibilities and discover how Kubota can help you get more done. For even more ideas and resources, visit KubotaUSA.com.



TABLE OF CONTENTS

SUB-COMPACT TRACTORS

2 BX Series

COMPACT TRACTORS

6 B01 Series

8 LX Series

12 Standard L Series

14 L70 Series

UTILITY TRACTORS

22 MX Series

24 M60 Series

26 M4 Series

28 M5 Series

30 M6S Series

32 M6 Series

AGRICULTURE TRACTORS

34 M7 Generation 4 Series

36 M8 Series

UTILITY/SPECIALTY AG TRACTORS

38 M Narrow Models

40 M Low-Profile Models

42 High-Clearance Models

HAY TOOLS

44 Disc Mowers

46 Disc Mower Conditioners

52 Tedders

54 Rotary Rakes

56 Wheel Rakes

58 Balers

60 Wrappers

62 VS Series

TRACTOR LOADER BACKHOES

64 Loaders/Landscapers

CONSTRUCTION EQUIPMENT

66 SCL1000 Series

68 SSV Compact Skid Steer Loaders

70 SVL Compact Track Loaders

72 Excavators

78 Wheel Loaders

UTILITY VEHICLES

80 RTV Series

83 Sidekick Series

86 RTV-X Series

MOWERS

94 T Series

96 GR Series

98 Z200 Series

100 Z400 Series

102 Z700 Series

104 SZ Series

106 W Series

108 ZG200 Series

110 ZG300 Series

112 ZD1000 Series

114 ZD1200 Series

116 ZD1611 Series

118 F Series

KUBOTA SERVICES

120 Kubota Services



SUB-COMPACT TRACTORS



BX Series BX1880 | BX2380 | BX2680

	BX1880	BX2380	BX2680
Engine Type	Kubota, liquid-cooled, diesel, 3-cylinder		
Horsepower (gross)*	16.6	21.6	23.3
Horsepower (PTO)	13.7	17.7	19.2
Displacement (cu. in.)	43.9	54.8	61.1
Length (w/ 3-point)	95.5"		
Width (min. tread)	44.1"	45.1"	
Height (with ROPS)	81.9"	83.1"	
Wheelbase	55.1"		
Ground Clearance (front axle)	5.8"	6.5"	
Speed (mph) (front/reverse)	0-7.8 / 0-5.9	0-8.4 / 0-6.5	
Rear 3-point hitch	Category I		
Lift capacity 24" behind pin lbs. (kg)	680 (310)		
Transmission	HST, high-low gear shift (2 forward/reverse)		
Tractor Weight (lbs.)	1,404	1,454	1,520

* SAE J1995

Reliability. Comfort. Versatility.

- › Kubota's Swift-Tach® loader allows for quick and easy removal and installation of the front loader without tools and without getting off the operator station
- › With an overall height of less than 7', the BX1880, BX2380, and BX2680 make storage a breeze — not having to fold the ROPS to park your tractor in a standard garage saves time and hassle
- › With a Standard Category I 3-point hitch, optional mid-mount mower decks, and an available front hitch, the BX Series can be equipped with an implement to quickly and easily handle most any loading task
- › The BX2380 and BX2680 deluxe operator's station with tilt steering and a deluxe high-back seat with armrests create a comfortable operator experience, making any chore seem less like work and more like fun
- › Equipped with a hydrostatic transmission (HST), the BX Series tractors are easy to use — simply press the pedal forward to go forward, press the pedal backwards for reverse — our treadle pedal system will have you feeling like a professional in no time
- › Got snow? The Kubota heated cab is a great dealer-installed option to add to your BX Series to improve comfort and protect yourself during those cold winter months



KEY ATTACHMENTS					
Front Loader	LA344 – Pin-on Style Bucket LA344S – Two-Lever Quick-Attach Bucket				
Mid-Mount Mower	48", 54"		54", 60"		
Easy-Over Mower	N/A		54", 60"		
FRONT LOADER SPECIFICATIONS	LA344			LA344S	
	BX1880	BX2380/BX2680		BX1880	BX2380/BX2680
Maximum Lift Height	70.7"	71.0"		70.7"	71.0"
Lift Capacity at Pivot Pin (1500 mm height) (lbs.)	820			699	
Breakout Force (bucket pivot pin) (lbf.)	1,407			1,286	
MOWER SPECIFICATIONS	MID-MOUNT			EASY-OVER	
Cutting Width	48"	54"	60"	54"	60"
Discharge	Side				
Mounting Method	Suspended				
Adjustment of Cutting Height	Dial				

SUB-COMPACT TRACTORS



BX Series BX23S

BX23S

Engine Type	Kubota, liquid-cooled, diesel, 3-cylinder
Horsepower (gross)*	21.6
Horsepower (PTO)	17.7
Displacement (cu. in.)	54.8
Length (w/3-point)	99.0" w/front guard
Width (min. tread)	45.1"
Height (w/ROPS)	86.2"
Wheelbase	55.1"
Ground Clearance (front axle)	6.5"
Speed (mph) (front/reverse)	0–8.4 / 0–6.5
Transmission	HST, high-low gear shift (2 forward/reverse)
Tractor Weight (lbs.)	1,598

* SAE J1995

Reliability. Comfort. Versatility.

- › Kubota's Swift-Tach® loader allows for quick and easy removal and installation of the front loader without tools and without getting off the operator station
- › The Kubota Swift-Connect® backhoe on the BX23S is designed to match perfectly with the tractor and loader—not only designed to tackle tough digging jobs but also designed to be versatile, the BX23S backhoe can be removed from the tractor quickly and easily without tools
- › With an optional Category I 3-point hitch, optional mid-mount mower decks, and an available front hitch, the BX Series can be equipped with an implement to quickly and easily handle almost any task
- › The BX23S has a deluxe high-back seat with armrests, tilt steering, and reversible seat for comfort when operating the tractor, loader, or backhoe
- › The ROPS operator opening has been widened, giving the operator additional room and comfort when operating the backhoe
- › Equipped with a hydrostatic transmission (HST), the BX Series tractors are easy to use—simply press the pedal forward to go forward, press the pedal backwards for reverse—our treadle pedal system will have you operating like a professional in no time
- › Got snow? The Kubota heated cab is a great dealer-installed option to add to your BX Series to improve comfort and protect yourself during those cold winter months

KEY ATTACHMENTS

Front Loader	Included
Backhoe	Included
Mid-Mount Mower	54", 60"
Easy-Over Mower	54", 60"

FRONT LOADER SPECIFICATIONS

	LA340 Pin-on Style Bucket	LA340S Two-Lever Quick-Attach Bucket
Maximum Lift Height	71"	
Lift Capacity at Pivot Pin (1500 mm height) (lbs.)	820	699
Breakout Force (bucket pivot pin) (lbf.)	1,407	1,286

BACKHOE SPECIFICATIONS

	BT603
Digging Depth	6' 2"
Transport Height	67.7"
Reach from Swing Pivot	102.8"
Bucket Size	8", 12", 16"
Thumb	Optional – Mechanical

MOWER SPECIFICATIONS

	MID-MOUNT		EASY-OVER	
Cutting Width	54"	60"	54"	60"
Discharge	Side			
Mounting Method	Suspended			
Adjustment of Cutting Height	Dial			

COMPACT TRACTORS



B01 Series B2301HSD | B2601HSD | B2401DT | B2401DTN

	B2301HSD	B2601HSD	B2401DT	B2401DTN
Engine Type	Kubota, liquid-cooled, diesel, 3-cylinder, Engine gross HP is 20.9HP for B2301 and 24.3HP for B2601		Kubota liquid-cooled, diesel, 3-cylinder	
Horsepower (gross)*	20.9	23.3	21.9	
Horsepower (PTO)	17.4	19.4	19.2	
Displacement (cu. in.)	61.1	68.5	68.5	
Length (w/o 3-point)	93.7"	94.9"	93.7"	92.8"
Width (min. tread)	45.3"	49"	48.8"	35.6"
Wheelbase	61.4"		61.4"	
Ground Clearance	12"	12.8"	12.2"	11"
Speed (mph) (front/reverse) with standard tires	0-11.8 / 0-8.9	0-12.7 / 0-9.5	0-11.7 / 0-6.0	0-10.9 / 0-5.6
Rear-3 point hitch	Category I			
Lift capacity 24" behind LP lbs. (kg)	1,411		1,290	
Transmission (HST)	HST (3-range)		Gear (9F/3R)	
Tractor Weight (lbs.)	1,566	1,632	1,521	1,433

Affordability. Power. Functionality.

- › The Standard B Series can be equipped with a Kubota-engineered-and-built front-end loader designed to meet your task needs and be easily removed from the tractor—no tools required
- › Kubota's Swift-Tach® loader, the LA435, allows for quick and easy removal and installation of the front loader without tools and without getting off the operator station
- › Available with a 54" or 60" mid-mount mower deck, the Standard B Series is designed to meet your turf mowing needs
- › Available Kubota front hitch allows for easy attachment or removal of front blade, front sweeper, and front snow blower
- › Both the B2301HSD and B2601HSD models are designed to be comfortable throughout the entire day with features such as an easy-to-use HST transmission, a large semi-flat operator deck, tilt steering, and a high-back suspension seat with standard arm rests
- › The B2401 model provides power and functionality at an affordable price with features such as a gear-drive transmission, a large semi-flat operator deck, easy-to-use control levers, and the unmatched Kubota quality
- › A Category I 3-point hitch with a quarter inching valve allows for a multitude of rear implements to meet customer needs
- › The B Series offers a wide variety of tires and sizes to fit your needs; the Goodyear R14 tires are a hybrid of the R4 (Industrial) and R1 (Ag) tires for maximum versatility

KEY ATTACHMENTS

Front Loader	LA435
Backhoe	BH70
Mid-Mount Mower	54", 60"

FRONT LOADER SPECIFICATIONS

	LA435
Maximum Lift Height at Pivot Pin	78.5"
Lift Capacity at Pivot Pin (1500 mm height) (lbs.)	1,175
Breakout Force (bucket pivot pin) (lbf.)	2,146

BACKHOE SPECIFICATIONS

	BH70
Digging Depth (2 ft. flat bottom)	85.2"
Loading Height	61.6"
Reach from Swing Pivot	116.8"
Bucket Size	10", 12", 16"
Thumb	Optional—Mechanical

MID-MOUNT MOWER SPECIFICATIONS

Cutting Width	54", 60"
Discharge	Side
Mounting Method	Suspended
Adjustment of Cutting Height	Dial

COMPACT TRACTORS



LX20 Series

LX3520DTN | LX3520HSD | LX4020HSD

	LX2620HSD	LX2620SUHSD	LX3520DTN	LX3520HSD	LX4020HSD
Engine Type	Indirect injection, vertical, water-cooled, 4-cycle diesel		Direct injection, vertical, water-cooled, 4-cycle diesel with turbo charger		
Horsepower (gross)*	23.3		34.9		39.8
Horsepower (PTO)	19.4		29.6	28.7	32.6
Displacement (cu. in.)	77.0		91.4		
Transmission	HST (3 ranges)		Gear	HST (3 ranges)	
Speed (mph) (front/reverse) with standard tires	0-11.2 / 0-8.4		0-14.7 / 0-14.6		0-17.0 / 0-13.0
Rear 3-point hitch	Category I				
Lift capacity 24" behind lift point (lbs.)	1,676		1,819	1,962	
Length	101.8"		2,494	101.6"	
Width	53.7"		39.4"	53.7"	
Wheelbase	65.6"		61.0"	66.7"	
Min. Ground Clearance	14.6"		12.8"	8.9"	
Tractor Weight (lbs.)	1,775		2,154	2,191	2,624

* SAE J1995

Comfort. Modern Styling. Operability.

- > Clutchless for easy operation, Kubota's proven 3-range hydrostatic transmission (HST) provides optimal speeds to match your job. Choose from low range when you need extra power at a low speed, mid range for normal operations, or high range for transporting from place to place. In addition, the brake pedal is positioned on the left side for comfort and functionality
- > The LX20 Series offers a wide variety of tires and sizes to fit your needs; the Goodyear R14T tires are a hybrid of the R4 (Industrial) and R1 (Ag) tires for maximum versatility
- > The LX20 Series can be equipped with a Kubota-built, performance-matched front loader. Features include a standard 2-lever quick coupler for universal attachments, an optional Swift-Tach® kit with a one-lever quick coupler for faster loader removal, and an optional mechanical self-leveling kit for easier material handling including pallet fork applications
- > The LX20 tractors can be equipped with mid-mount mower decks in 60" or 72" making them among the largest mid-mount mower decks available. Additionally, the 60" and 72" options for the LX3520 and LX4020 come standard with an integrated wash port to quickly and effectively clean all three mower blades, making cleanup a breeze
- > The LX3520 Narrow is ideal for spraying, mowing, and towing between tight rows. With a total width of just 39.4", the LX3520 Narrow can easily maneuver through orchards, vineyards, and nurseries

FRONT LOADER SPECIFICATIONS

	LX2620HSD / LX2620SUHSD	LX3520SUHSDC / LX3520HSD / LX3520HSDC	LX3520DTN	LX4020HSD / LX4020HSDC
Maximum Lift Height at Pivot Pin	LA535 84.0"	LA545 87.6"	N/A	LA545 87.6"
Maximum Lift Capacity at Pivot Pin (1500 mm height) (lbs.)	1,324	1,325	N/A	1,325

BACKHOE SPECIFICATIONS

	BH77*
Digging Depth (2 ft. flat bottom)	86.8"
Loading Height	70.2"
Reach from Swing Pivot	123.7"
Bucket Sizes	10", 12", 16", 24"
Thumb	Optional-Mechanical

MID-MOUNT MOWER SPECIFICATIONS

Cutting Width	60" and 72"
Discharge	Side
Mounting Method	Floating
Adjustment of Cutting Height	Gauge wheel

* Specifications shown when attached to an LX3520HSD. BH77 specifications may vary depending on the tractor.

COMPACT TRACTORS



LX20 Series

LX3520SUHSDC | LX3520HSDC | LX4020HSDC

	LX2620HSDC	LX3520SUHSDC	LX3520HSDC	LX4020HSDC
Engine Type	Indirect injection, vertical, water-cooled, 4-cycle diesel	Direct injection, vertical, water-cooled, 4-cycle diesel with turbo charger		
Horsepower (gross)*	23.3	34.9		39.8
Horsepower (PTO)	19.4	28.7		31.2
Displacement (cu. in.)	77.0	91.4		
Transmission	HST (3 ranges)			
Speed (mph) (front/reverse) with standard tires	0–11.2 / 0–8.4	0–17.0 / 0–13.0		
Rear 3-point hitch	Category I			
Lift capacity 24" behind lift point (lbs.)	1,676	1,962		
Length	103.9	101.6"		
Width	53.7			
Wheelbase	65.6	66.7"		
Min. Ground Clearance	14.6	8.9"		
Tractor Weight (lbs.)	2,249	2,590		2,624

* SAE J1995

Comfort. Modern Styling. Operability.

- › The LX20 Series boasts three different horsepower options to meet a variety of needs. While focusing on operator comfort, noise reduction, and front loader operability, the LX20 models are the answer to comfort, ease of operation, and workability
- › Clutchless for easy operation, Kubota's proven 3-range hydrostatic transmission (HST) provides optimal speeds to match your job. Choose from low range when you need extra power at a low speed, mid range for normal operations, or high range for transporting from place to place. In addition, the brake pedal is positioned on the left side for comfort and functionality
- › The LX20 Series factory-installed cabs optimize operator comfort year-round with deluxe features such as A/C and heater, front LED headlights and work lights, a wide, spacious flat deck, reclining high-back suspension seat with standard armrests, tilt-steering, cruise control, telescopic stabilizers, mid* and rear PTO, integrated loader joystick, and easy-to-use premium color-coded controls
- › The LX20 Series can be equipped with the Kubota-built, performance-matched front loader. Features include a standard 2-lever quick coupler for universal attachments, an optional Swift-Tach® kit with a one-lever quick coupler for faster loader removal, and an optional industry-exclusive mechanical self-leveling kit for easier material handling including pallet fork applications
- › In addition to the premium cab, the Special Utility (SU model) cab adds an economy cab tractor to the LX20 series lineup. The high power engine delivers performance while maintaining the comfort, quality, and versatility of the LX20 Series
- › The LX20 tractors can be equipped with mid-mount mower decks in 60" or 72", making them among the largest mid-mount mower decks available. Additionally, the 60" and 72" options for the LX3520 and LX4020 come standard with an integrated wash port to quickly and effectively clean all three mower blades, making cleanup a breeze.

*Mid PTO standard on LX2620HSDC, LX3520HSDC, and LX4020HSDC

FRONT LOADER SPECIFICATIONS				
	LX2620HSDC	LX3520SUHSDC	LX3520HSDC	LX4020HSDC
	LA535		LA545	
Maximum Lift Height at Pivot Pin	84.0"		87.6"	
Maximum Lift Capacity at Pivot Pin (1500 mm height) (lbs.)	1,324		1,325	

BACKHOE SPECIFICATIONS	
	BH77*
Digging Depth (2 ft. flat bottom)	86.8"
Loading Height	70.2"
Reach from Swing Pivot	123.7"
Bucket Sizes	10", 12", 16", 24"
Thumb	Optional-Mechanical

MID-MOUNT MOWER SPECIFICATIONS	
Cutting Width	60" and 72"
Discharge	Side
Mounting Method	Floating
Adjustment of Cutting Height	Gauge wheel

* Specifications shown when attached to an LX3520HSD. BH77 specifications may vary depending on the tractor.

COMPACT TRACTORS



Standard L02 Series L2502DT/HST | L3302DT/HST | L3902DT/HST | L4802DT/HST

	L2502F (2WD)		L2502 (4WD)		L3302 (4WD)		L3902 (4WD)		L4802DTN (4WD)		L4802F (2WD)		L4802 (4WD)	
	DT	HST	DT	HST	DT	HST	DT	HST	DT	DT	DT	HST	DT	HST
Engine Type	Direct injection, vertical, water-cooled 4-cycle diesel													
Horsepower (gross)*	23.3		33.0		37.5		48.4				48.4			
Horsepower (PTO)	19.8	18.4	28.0	26.1	32.1	30.3	40.5				40.5		39.0	
Displacement (cu. in.)	100.5		111.4		111.4		148.5				148.5			
Transmission	Constant mesh with synchronized shuttle, 8 forward and 8 reverse	Hydrostatic transmission, 3-range speed	Gear shift with synchronized shuttle, 8 forward and 8 reverse	Hydrostatic transmission, 3-range speed	Gear shift with synchronized shuttle, 8 forward and 8 reverse	Hydrostatic transmission, 3-range speed	Constant mesh with synchronized shuttle, 8 forward and 8 reverse				Constant mesh with synchronized shuttle, 8 forward and 8 reverse		Hydrostatic transmission, 3-range speed	
Speed (mph) (front/reverse) with standard tires	0.9–10.7 / 0.9–10.7	0–11.5 / 0–10.3	1.1–13.2 / 1.1–13.2	0–14.1 / 0–12.7	1.1–13.2 / 1.1–13.2	0–14.1 / 0–12.7	1.2–12.9 / 1.2 / 12.4	1.4–14.9 / 1.3–14.3	1.2–12.9 / 1.2 / 12.4	1.2–12.9 / 1.2 / 12.4	0–15.8 / 0–14.2			
Rear 3-point hitch	SAE Category I													
Lift capacity 24" behind lift point (lbs.)	1,389		1,435		2,320						2,320			
Length	111.4"		108.7"		117.5"		122.8"		120.3"					
Width (min. tread)			55.1"		52.7"		62.2"							
Wheelbase (2WD/4WD)	63.8"		63.4"		72.6"									
Min. Ground Clearance	13.6"		13.4"		11.5"		15.2"							
Tractor Weight (lbs.)	2,601	2,833	2,734	2,778	2,767	2,778	3,362	3,296	3,428	3,549				

Comfort. Modern Styling. Operability.

- > The L02 Series continues the legendary Kubota Standard L history and further improves it. The L02 is once again designed with a Kubota-engineered-and-built diesel engine, all metal hood and fenders, and new Kubota-engineered-and-built front loader while improving the overall comfort, operation, and styling
- > Updated with new LED headlights and side work lights, lever grips, and redesigned bonnet and front grille for a new updated styling look
- > Improved ease of use with clutchless independent PTO switch (HST models only)
- > Comfort enhanced operator stations that include standard rubber floor mats, improved suspension seat, redesigned brake pedal layout (HST models only), and optional armrests
- > The L02 series provides multiple horsepower options as well as 2WD/4WD and DT or HST transmission options to ensure there is the right L02 model to fit your needs
- > The LA526 and LA766 front loader has a round-shaped bucket profile to maximize material handling performance when compared to previous models. It is available with an optional brush guard that offers improved protection for the LED headlights and bonnet as compared to the standard grill guard



	L2502F (2WD) & L2502DT/HST (4WD)	L3302 DT/HST & L3902 DT/ HST (4WD)	L4802DTN	L4802F (2WD) & L4802 DT/ HST (4WD)
Front Loader		LA526	N/A	LA766
Backhoe		BH77	N/A	BH92

FRONT LOADER SPECIFICATIONS

	LA526	N/A	LA766
Maximum Lift Height at Pivot Pin	94.8"	N/A	105.2"
Maximum Lift Capacity at Pivot Pin (1500 mm height) (lbs.)	1,446.0	N/A	2,147.7

BACKHOE SPECIFICATIONS

	BH77	N/A	BH92
Digging Depth (2 ft. flat bottom)	89.8"	N/A	109.8"
Loading Height (length of dipper cyl.=680 mm)	65.7"	N/A	84.3"
Reach from Swing Pivot	124.3"	N/A	150.4"

COMPACT TRACTORS



L70 Series

L3770 Deluxe | L4270 Deluxe | L3970 Premium | L4470 Premium
L5070 Premium | L6070 Premium

	L3770 Deluxe	L4270 Deluxe	L3970 Premium	L4470 Premium	L5070 Premium	L6070 Premium
Engine Gross Horsepower**	37	42	39	44	50	60
Power Take-Off Horsepower	28.0	32.5	30.9	36.2	39.8	53.0

All models are available in an open ROPS (Rollover Protective Structure) or enclosed cab configurations.

** SAE J1995 Engine Gross Power

L70 Series

	DELUXE		PREMIUM	
	ROPS	Cab	ROPS	Cab
Bluetooth		○		●
Daytime Running Lights			●	●
Drive Modes			●	●
Engine	Naturally Aspirated		Turbo	
Front Sightline Camera			○	○
Hands-Free Phone		○		●
Hydro-Dual Speed (H-DS) ¹			●	●
K-Command Functionality	Navigation Pad		Jog Dial	
LED Lighting	●	●	●	●
Multi-Function Loader Joystick			●	●
Mid-Power Take-Off				○
Rear Sightline Camera				○
Rear Remotes ²	○	○	○	○
Rear Working Lights	○	○	○	○
RPM Memory Switches (x2)			●	●
Telescopic Steering Wheel				●
Tilt Steering Wheel	●	●	●	●
USB Charger				●

¹ Manual lever is standard on the premium and cold weather models.

² Two remotes are standard for the cold weather models, and up to three remotes are optional for all models.

● Standard
○ Optional



COMPACT TRACTORS



Hard work meets high end.

> **K-Command Display**

Access customizable tractor settings, hands-free calling, and Bluetooth® wireless technology through a vibrant color display that puts advanced control and information at your fingertips.

> **Remote Start**

Start your machine to warm up or cool down the cab before you climb in—an optional feature designed to enhance comfort and convenience.

> **Sightline Cameras**

Enhance visibility of your surroundings and attachments with optional front and rear cameras integrated into the K-Command Display. Useful for low-speed loader applications and field work, these cameras improve situational awareness and simplify the process of attaching and detaching implements.

> **Seat Options - Optional**

Heated, air-ride, degrees of swivel—all-day comfort awaits.

> **Work Lights and LED Running Lights**

Front and rear work lights, plus running lights, enhance visibility and safety from dawn to dusk.

> **HVAC System**

Stay comfortable year-round with a powerful HVAC system featuring defrost vents, air recirculation, and adjustable airflow. Whether you're working through rain, shine, heat, or snow, you'll remain focused, productive, and in complete control.

> **Ergonomic Layout**

Every detail is placed for ease and comfort from tilt steering and lever spacing, to flat floors and ample storage. The uncluttered platform keeps you focused and agile, even in work boots.

Performance That Adapts

Kubota's three-range intelligent hydrostatic transmission (iHST) delivers smooth, responsive power you can tailor to almost any task. Adjust pedal sensitivity, shift between High and Low on the fly, and customize drive modes for total control in almost any condition.

- › **Customizable Drive Modes**
Select from Snow, Road, Loader, and Cutter modes. Each mode offers customizable iHST settings that let you fine-tune performance to the task at hand.
- › **Auto Throttle Advance**
Automatically increases engine speed as you press the pedal, delivering the power you need without separate throttle control.
- › **Hydro-Dual Speed (H-DS)**
Manually or automatically shift between high and low speeds for all three ranges with no stopping required. This increases operator efficiency during transport or while moving material.
- › **HST Throttle Response**
Whether you want steady, gradual movement or quick and responsive acceleration, adjust iHST pedal sensitivity from slow to fast to match your preference or task.
- › **Stall Guard**
Senses engine strain and makes real-time adjustments to the transmission to help prevent the engine from stalling when mowing thick brush or pushing into heavy material.
- › **Engine Start Security**
Help prevent unauthorized use with a built-in anti-theft system.



COMPACT TRACTORS



Built to Perform

The Grand L70 Series features three performance-matched loaders that transform your tractor into a versatile material-handling powerhouse. Now available with Kubota's Mechanical Self-Leveling Loader to keep your load level with enhanced precision. Our loaders deliver the reliability and performance needed to maximize productivity across a wide range of applications.

- › **Dual Function Loader Valve**
Operate with greater efficiency and control through simultaneous use of the boom and bucket.
- › **Multi-Function Loader Control Joystick**
(Premium Models Only)
Your most-used controls are in the palm of your hand. Select drive mode, engage/disengage auto-throttle advance, and utilize third function hydraulics.
- › **Tucked-In Hydraulic Lines**
Cleaner visibility and added protection from snow and ice buildup.
- › **Parking Stands and Toolless Loader Removal**
Quickly remove or reattach the loader without tools using integrated parking stands.
- › **Grill and Brush Guard**
Protect front-end components during loader work and rough terrain. The grill comes standard with the loader while the optional brush guard adds an extra layer.
- › **3rd Function**
Add more versatility with the optional third-function valve, ideal for running attachments like grapples or snow blades that require independent hydraulic control.
- › **Under-Boom LED Work Lights**
Enhance visibility in low-light conditions with optional under-boom LED work lights. The protected, low-profile design helps keep them out of harm's way.



COMPACT TRACTORS



Cold weather models

Ready to take on harsh winters and heavy snow, the Grand L70's cold weather models keep you moving when the forecast says otherwise. Inside the ProCab, our high-output HVAC keeps you warm through long shifts. Visibility-enhancing features like rear LED work lights, heated glass, and a rear wiper make it easier to operate in low-light and snowy weather conditions. With two factory-installed rear remotes, you can run hydraulic implements like snowblowers and blades without leaving the cab.

- › **Heated Cab Comfort**
Stay warm and alert with HVAC, defrost vents, and adjustable airflow.
- › **Rear and Side Defrosters**
Clear snow and fog quickly for full visibility in cold, wet conditions.
- › **Three-Point Hitch Accumulator**
Optional three-point hitch accumulator reduces bounce and stress when using rear snow implements, especially over uneven terrain.
- › **Floating Lift Rods**
Optional lift rods help the front-mounted snow blade or broom glide smoothly over surface changes.
- › **Remote Start**
Optional remote start allows you to start your machine indoors so it's warm and ready when you are.
- › **Nokian Brand Snow Tires**
Optional snow tires provide excellent traction in snow and ice, ensuring confidence in the most challenging conditions.
- › **Under-Boom LED Work Lights**
Optional low-profile lights brighten your path whether it's early or late.

GRAND L70

	L3770 Deluxe	L4270 Deluxe	L3970 Premium	L4470 Premium	L5070 Premium	L6070 Premium
ENGINE						
Model	D1803-CR-E5	V2403-CR-E5	D1803-CR-TE5	V2403-CR-TE5	V2403-CR-TE5	V2403-CR-TIE5
Direction Injection, Water-Cooled 4-Cycle Diesel, Common Rail System	•	•	•	•	•	•
Turbocharger			•	•	•	•
Intercooler						•
Cylinders	3	4	3	4		
Total Displacement - n3 (L)	111.4 (1.826)	148.5 (2.434)	111.4 (1.826)	148.5 (2.434)		
Bore & Stroke - in. (mm)	3.4 x 4.0 (87 x 102.4)					
Rated Revolution - RPM	2,600			2,300		
Low Idling Revolution - RPM	800					
Engine Gross Power* - HP (kW)	37 (27.6)	42 (31.3)	39 (29.1)	44 (32.8)	50 (37.3)	60 (44.7)
PTO HP Power - HP (kW) / RPM	28 (20.9) / 2,600	32.5 (24.2) / 2,600	30.9 (23.0) / 2,300	36.2 (27) / 2,300	39.8 (29.7) / 2,300	53 (39.5) / 2,300
Maximum Torque - lbf. x ft. (N x m)	84.2 (114.1)	98.5 (133.5)	109.4 (148.3)	130.5 (177)	144.3 (195.6)	180.7 (245)
Battery	12 V, RC: 133 min, CCA: 582 A		Non-Cold Climate: 12 V, RC: 133 min, CCA: 582 A Cold Climate Model: 12 V, RC: 150 min, CCA: 680 A			
DIMENSIONS						
Overall Length (without 3-point) in. (mm)	115.9 (2,945)	123.6 (3,140)	121.9 (3,095)	129.5 (3,290)		133.9 (3,400)
Overall Width (minimum tread) in. (mm)	59.8 (1,520)	66.5 (1,690)	59.8 (1,520)	66.5 (1,690)		67.3 (1,710)
Standard Tire Size – Front	7.0–16	8.3–16	7.0–16	8.3–16		9.5–16
Standard Tire Size – Rear	12.4–24	14.9–24	12.4–24	14.9–24		14.9–26
Overall Height – Cab - in. (mm)	91.3 (2,320)	91.9 (2,335)	91.3 (2,320)	91.9 (2,335)		93.3 (2,370)
Overall Height – ROPS - in. (mm)	97.2 (2,470)	97.6 (2,480)	97.2 (2,470)	97.6 (2,480)		98.0 (2,490)
Wheelbase - in. (mm)	71.1 (1,805)	74.6 (1,895)	77.0 (1,955)	80.5 (2,045)		81.3 (2,065)
Minimum Ground Clearance - in. (mm)	14.2 (360)		13.5 (342)	14.2 (360)		15.4 (392)
Tread – Front - in. (mm)	45.5 (1,155)				52.2 (1,325)	
Tread – Rear - in. (mm)	47.2 (1,200)	50.6 (1,285)	47.2 (1,200)	50.6 (1,285)		52.2 (1,325)
	51.2 (1,300)	56.5 (1,435)	51.2 (1,300)	56.5 (1,435)		56.3 (1,430)
	54.5 (1,385)	60.2 (1,530)	54.5 (1,385)	60.2 (1,530)		
	58.3 (1,480)		58.3 (1,480)			
Weight – Cab - lbs. (kg)	4,034 (1,830)	4,288 (1,945)	4,387 (1,990)	4,663 (2,115)		4,762 (2,160)
Weight – ROPS - lbs. (kg)	3,726 (1,690)	3,935 (1,785)	4,057 (1,840)	4,266 (1,935)		4,387 (1,990)
Minimum Turning Radius (with brake) - ft. (m)	8.9 (2.7)			9.5 (2.9)		
TRANSMISSION						
Hydrostatic Transmission (3 ranges)	•	•	•	•	•	•
Braking System – Wet Disk Type	•	•	•	•	•	•
Hydro-Dual Speed (H-DS)	•	•	•	•	•	•
Traveling Speed - mph (km/h)	0.1~17.2 (0.1~27.7)	0.1~17.7 (0.1~28.5)	0.1~18.3 (0.1~29.4)	0.1~17.9 (0.1~28.8)		0.1~18.5 (0.1~29.8)
HYDRAULICS						
Hydrostatic Power Steering	•	•	•	•	•	•
Pump Capacity - gal (L) / min	8.03 (30.4)	9.40 (35.6)	9.83 (37.2)			
Maximum Lift Force (at lift points) - lbs. (kg)	3,748 (1,700)	3,858 (1,750)	3,748 (1,700)	3,858 (1,750)		
Maximum Lift Force (24 in. behind lift points) - lbs. (kg)	2,646 (1,200)	2,756 (1,250)	2,646 (1,200)	2,756 (1,250)		2,976 (1,350)
Optional Rear Remotes	3					
POWER TAKE-OFF						
Rear PTO	SAE 1 - 3/8, 6 Splines					
Rear PTO – Engine Speed - RPM	540 / 2,491			540 / 2,299		540 / 2,258
3-Point Hitch	SAE Category 1					SAE Category 1, 2

* SAE J1995

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota Dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global website. Kubota does not provide parts, warranty, or service for any Product which is re-sold or retained in any country other than the country for which the Product(s) were designed or manufactured.

COMPACT UTILITY TRACTORS



MX Series

MX4900 | MX5400 | MX6000

	MX4900 DT (4WD) / DTC (4WD) / HST (4WD) / HSTC (4WD)	MX5400F (2WD) / DT (4WD) / DTC (4WD) / HST (4WD) / HSTC (4WD)	MX6000HST (4WD) / HSTC (4WD)
Engine Type	Kubota liquid-cooled, diesel, CRS, Direct Injection		
Horsepower (gross)*	50.3 (DT/DTC) / 51.8 (HST/HSTC)	55.5 (F/DT/DTC) / 57.0 (HST/HSTC)	63.4
Horsepower (PTO)	41.3	46.5	51.8
Displacement (cu. in.)	148.6		
Transmission	F/DT: Partially synchronized (3rd & 4th) Shuttle: Synchronized HST: Hydrostatic pedal operate		HST: Hydrostatic pedal operate
Number of Speeds (forward/reverse)	F/DT: 8F/8R HST: 3-range speed		3-range speed
Hydraulic Flow (gpm) (remotes/3-point hitch)	9.5		
Width	69.7"		
Wheelbase	74.6"		
Min. Ground Clearance	15.2"		
Tractor Weight (lbs.)	3,474 / 4,268	3,734 / 4,268	

Affordable. Comfort. Versatility.

- > Achieve year-round comfort with the MX cab. This wide, spacious cab features a flat platform with plenty of legroom, tilt-steering, A/C & heating, easy access, and use of operator levers and controls, as well as the ability to accessorize it to fit your needs
- > Kick back and relax in the MX ROPS with features such as a wide, spacious flat rubber floor-mat deck, suspension seat, and easy-to-use, ergonomically located color-coded controls



- > Whether your needs are to maximize productivity with the cost-effective gear-drive transmission, or to have smoother performance, greater operator comfort, and ease of use with the HST Transmission, the MX series offers you affordable choices in both CAB and ROPS models
- > Specifically designed to match the MX Series for maximum performance, the Kubota-built LA1065 front loader provides the power needed for heavy-duty jobs with its high lift capacity, lift height, and breakout force
- > Versatility is unmatched with the MX Series. With a tight-turning radius, Cat. 1 & 2 three-point hitch, Kubota's LA1065 front loader and BH92 backhoe plus a full lineup of Land Pride performance-matched implements, the MX Series was made for both big and small applications
- > Affordability isn't just the upfront purchase, it's there for the long haul. The MX Series feature strong, cast steel axles and rear end housing, a steel platform and fenders, a one-piece full-open steel hood, the world-renowned Kubota diesel engine, and protected hydraulic hoses. The MX Series is built to minimize maintenance cost by withstanding heavy loads or potential wear and tear over the years

KEY ATTACHMENTS

MX4900 / MX5400 / MX6000

Front Loader	LA1065
Backhoe	BH92 ¹

FRONT LOADER SPECIFICATIONS

LA1065

Maximum Lift Height at Pivot Pin	111.2"
Lift Capacity at Pivot Pin (Max Height) (lbs.)	2,275
Lift Capacity at Pivot Pin (1500 mm height) (lbs.)	2,864
Breakout Force (bucket pivot pin) (lbf.)	3981

BACKHOE SPECIFICATIONS

BH92¹

Digging Depth (2 ft. flat bottom)	109.8"
Loading Height (length of dipper cyl. = 680 mm)	84.3"
Reach from Swing Pivot	150.4"
Bucket Sizes	12", 16", 18", 24", 30", 36"
Thumb	Optional: Mechanical or Hydraulic

¹BH92 Backhoe cannot be used with cab models.

COMPACT UTILITY TRACTORS



M60 Series M5660 | M6060 | M7060

Dependable. Straightforward. Trustworthy.

- › Kubota's revolutionary common rail system (CRS) with exhaust gas recirculation system (EGR) and Diesel Particulate Filter (DPF) muffler combine more torque at low RPM with less emissions and better fuel efficiency than previous models
- › State-of-the-art external hydraulic cylinders improve lifting power and offer easier maintenance
- › The M5660SU offers an ample 17.2-gallon (65 L) fuel tank to keep you working longer between fill-ups
- › The innovative and stylish design of the cab gives the operator a more comfortable and spacious environment year-round, and a curved upper windshield increases upward visibility—ideal for long days inside the cab
- › Engines feature electronic control of engine RPM—with the push of a button, the system keeps engine revolution constant, making working with PTO-driven implements much more efficient
- › Hydraulic Shuttle Transmission is standard on all models for effortless shifting between forward and reverse

M60 Series

	M5660SUH (2WD) / SUHD (4WD)	M6060HFC (2WD, Cab) / HD (4WD) / HDC (4WD, Cab)	M7060HFC (2WD, Cab) / HD (4WD) / HDC (4WD, Cab) / HD12 (4WD) / HDC12 (4WD, Cab)
Loader Model	LA1154SU	LA1154A	
Engine Type (Kubota Injection, diesel)	V2403-CR-TE4, 4-cylinder, common rail system	E-CDIS, V3307- CR-TE4, 4-cylinder	E-CDIS, V3307-CR-TE4, 4-cylinder
Horsepower (gross)*	58.7	66.4	72.1
Horsepower (PTO)	50	56	M7060HFC/HD/HDC 62.0 M7060HD12/HDC12 60.0
Displacement (cu. in.)	148.5	203.0	
Alternator (amps)	45	45 (ROPS) / 60 (cab) (100 optional)	
Transmission/Shuttle	Fully synchronized hydraulic shuttle		
Height (top of ROPS / cab)	95.3"	96.9" / 100.6"	97.2" / 101"
Overall Width (Minimum)	73"		
Overall Length (2WD / 4WD)	138.7" / 136"	142.7" / 138"	
Std. Speeds (forward/reverse)	F8/R8	F8/R8	F8/R8, F12/R12
Hydraulic (gpm)	10.6	11.0	11.0 (16.0 on 12-speed models)
Hydraulic PTO (rpm)	540 (540/540E optional)		540 (540/540E optional) (540/540E standard on 12-speed)
Category I/II, 3-Point Hitch	Yes		
Tractor Weight – ROPS Models (2WD / 4WD) (lbs.)	4,189 / 4,387	N/A / 5,005	N/A / 5,027
Tractor Weight – Cab Models (2WD / 4WD) (lbs.)	N/A	5,226 / 5,358	5,248 / 5,380
Compatible Front Loader	LA1154SU	LA1154	
FRONT LOADER SPECIFICATIONS			
Maximum Lift Height / Power at Pivot Pin	130.9"	132.7" / 117.2"	
Lift Capacity at Pivot Pin (Max Height / Power) (lbs.)	2,469 / 2,928		
Lift Capacity at Pivot Pin (1500 mm height / power) (lbs.)	3,210 / 3,686		
Breakout Force Height / Power (bucket pivot pin) (lbf.)	4,230 / 5,354		

* SAE J1995



COMPACT UTILITY TRACTORS



M4 Series M4D-061 | M4-071 | M4D-071

	M4D-061HDC12 / 4WD	M4-071HDC12 / 4WD	M4D-071HDC12 / 4WD
Engine		V3307-CR-TE4	
No. of Cylinders/Aspiration		4 / turbocharged	
Horsepower (gross)*	65.4		72.1
Horsepower (PTO)	52		60
Total Displacement (cu. in.)		203	
Rated Engine (rpm)		2,400	
Fuel Tank Capacity (gal)		23.8	
Alternator (amps)		130	
Transmission No. of Speeds		F12 / R12 (option: F18 / R18 with Creep)	
Shuttle Shift		Hydraulic shuttle	
4WD Clutch Type	Electro-hydraulic on-the-go	Mechanical on-the-go	Electro-hydraulic on-the-go
Compatible Front Loader		LA1154	
FRONT LOADER SPECIFICATIONS			
Maximum Lift Height / Power at Pivot Pin		133.0" / 117.6"	
Lift Capacity at Pivot Pin (Max Height / Power) (lbs.)		2,674 / 2,928	
Lift Capacity at Pivot Pin (1500 mm height / power) (lbs.)		3,228 / 3,741	
Breakout Force Height / Power (bucket pivot pin) (lbf.)		4,079 / 5,128	

* SAE J1995

Comfort. Performance. Efficiency.

- > The spacious Category II cab comes standard with a high visibility roof panel and is designed for optimal functionality
- > Reduces fuel consumption and operating cost
- > With 16.7 gallons per minute of hydraulic flow, operators can complete more work in less time, especially for loader work
- > The interior console light delivers better visibility of controls while operating at night. With an electro-hydraulic shuttle and declutch button, Kubota delivers transitions between gears with simplicity and ease
- > Two remote valves, one Self-Canceling Detent and one Float valve, come standard on the Deluxe models
- > The M4 Series tractors are built tough with over 3,300 pounds of 3-point lift capacity at 24 in. behind the lift points
- > The instructor seat comes standard on the Deluxe model and is optional on the Standard model



HYDRAULICS			
	M4D-061HDC12 / 4WD	M4-071HDC12 / 4WD	M4D-071HDC12 / 4WD
Pump Capacity (3-Point Hitch) (gpm)	16.7		
3-Point Hitch (Category II)	Telescopic lower link ends, telescopic stabilizers		
Control System	Position, draft (top-link sensing), and mixed control		
Lift Capacity (lbs.) (24 in. behind lift point ISO)	3,307		
Standard Remote Valves	2 (SCD / FD), Max 3	1 (SCD), Max 3	2 (SCD / FD), Max 3
PTO Speed (rpm)	540 / 540E	540 (540/540E: OPT)	540 / 540E
DIMENSIONS AND WEIGHT			
Wheelbase	84.1"		
Overall Width	75.6"		
Overall Length	144"		
Overall Height (top of ROPS or cab)	101"		
Weight (lbs.)	6,008 / 5,952 / 6,008		

UTILITY AG TRACTORS



M5 Series M5-091 | M5-111

	M5-091						M5-111						
	HF (Open Station)	HFC (Cab)	HD (Open Station)	HD12 (Open Station)	HDC (Cab)	HDC12 (Cab)	HF (Open Station)	HFC (Cab)	HD (Open Station)	HD12 (Open Station)	HDC (Cab)	HDC12 (Cab)	HDC24 (Cab)
2WD / 4WD	2WD		4WD				2WD		4WD				
Engine	V3800CR-TIER4												
No. of Cylinders /Aspiration	4 / turbocharged												
Horsepower (gross)*	92.5						105.6						
Horsepower (PTO** at rated engine RPM)	76						89						
Total Displacement (cu. in.)	230												
Rated Engine (rpm)	2,400	2,600	2,400		2,600		2,400	2,600	2,400			2,600	
Fuel Tank Capacity (gal)	27.7												
Alternator (amps)	60	80	60		80		60	80	60			80	
Transmission No. of Speeds	F8/R8		F12/R12	F8/R8	F12/ R12		F8/R8		F12/ R12	F8/R8	F12/ R12	F24/ R24	
Shuttle Shift	Electro-hydraulic shuttle												
Max. Traveling Speed (mph)	17.7	19.2	17.7	22.6	19.2	22.6	18.6	20.1	18.6	23.6	20.1	23.6	23.4
Main Clutch Type	Multiple wet disc												
Compatible Front Loader	LA1854												

* SAE J1995; ** Internal Kubota Test

Precise. Dynamic. Productive.

> The M5-091 and M5-111 combine Kubota's DPF (Diesel Particulate Filter) with SCR (Selective Catalytic Reduction) technologies to meet Tier 4 Final regulations



- > Using the Constant RPM Management switch keeps engine revolution constant while reducing drops in PTO speed
- > We bring you luxury with the Ultra Grand Cab II: a fully enclosed cab with air conditioning, a sunroof with a retractable sunshade, rubber cushions under the cab, and an optional instructor's seat for new levels of comfort
- > Electro-hydraulic shuttle for smooth shifting between forward and reverse eliminates the need to depress the clutch every time you change directions
- > Hydraulic wet disc brakes increase overall tractor longevity
- > Bevel-gear front axle provides greater all-around maneuverability
- > A Category II 3-point hitch allows fast and simple attachment of rear-mounted implements
- > Floating lift rods come standard for a smoother ride and enhanced traction while using the 3-point hitch

HYDRAULICS

	M5-091					M5-111							
	HF (Open Station)	HFC (Cab)	HD (Open Station)	HD12 (Open Station)	HDC (Cab)	HDC12 (Cab)	HF (Open Station)	HFC (Cab)	HD (Open Station)	HD12 (Open Station)	HDC (Cab)	HDC12 (Cab)	HDC24 (Cab)
Rater Flow at Remote Outlets (gpm)	15.7	17.0	15.7		17.0		15.7	17.0	15.7			17.0	
3-Point Hitch (Category II)	Telescopic lower link ends, telescopic stabilizers												
Control System	Position, draft (top link sensing), and mixed control												
Lift Capacity (lbs.) (24 in. behind lift point ISO)	4,630		6,063	4,630	6,063	4,630		6,063	4,630	6,063			
Standard Remote Valves	2 (Max 3)												
PTO Speed (rpm)	540 ¹		540/ 540E ²	540 ¹	540/ 540E ²	540 ¹		540/ 540E ²	540 ¹	540/ 540E ²	540 ¹	540/ 540E ²	

DIMENSIONS AND WEIGHT

Wheelbase	90"		88.6"		90"		88.6"	
Overall Width	77.2"		78.3"		78.3"		79.1"	
Overall Length	156.5"		155.9"		156.5"		155.9"	
Overall Height (top of Open Station or Cab)	98.9"	100.2"	98.9"	100.2"	99.8"	101.2"	99.8"	101.2"
Weight (lbs.)	5,732	6,482	6,151	6,900	5,865	6,615	6,283	7,033

¹Optional 540E, Optional 540/1000; ²Optional 540/1000

UTILITY AG TRACTORS



M6S Series M6S-111

	M6S-111SHF (2WD) / SHC (2WD, Cab)	M6S-111SHD (4WD) / SHDC (4WD, Cab) / SHDC2 (4WD, Cab)	M6S-111SDS2 (4WD) / SDSC (4WD, Cab) / SDSC2 (4WD, Cab)
Engine	V3800-CR-TIEF4		
No. of Cylinders / Aspiration	4 / Turbocharger with intercooler		
Total Displacement (cu. in.)	230		
Rated Speed (rpm)	2,600		
Horsepower (gross)*	114.1		
Horsepower (PTO) at rated engine RPM**	95		
PTO Speed (rpm)	540 (540/1000 factory option)		
Fuel Tank Capacity (gal)	46.2		
Alternator (amps)	80		
Transmission – No. of Speeds	16F/16R (24F/24R w/creep)	32F/32R (48F/48R w/creep)	
Shuttle Shift	Electro-hydraulic		
Max. Traveling Speed (mph)	23.34 (Open Station) / 23.16 (Cab)		
Main Clutch Type	Wet disc electro-hydraulic operated		

* SAE J1995 **OECD Code 2

Economical. Functional. Reliable.

- › Technology-driven V3800 Tier 4 Final engine features a common rail system (CRS), intercooler, and exhaust gas recirculation (EGR), and uses a Diesel Particulate Filter (DPF) and selective catalytic reduction (SCR)
- › Design of the main shift lever provides a comfortable, easy-to-use feel and better visibility of the lever's shift stages (Hi-Lo, etc.) to increase operator efficiency
- › Swing Shift Plus Transmission models give you 32F/32R speeds and allow you to operate the Swing Shift as well as the dual speed with just one lever
- › De-clutch button is available on all models, allowing you to shift a gear without using the clutch pedal
- › This tractor is ready to accept implements requiring multiple valves with the M6S now having two standard rear remote valves—one self-canceling detent valve and one floating detent valve—and an optional third remote valve

HYDRAULICS

	M6S-111SHF (2WD) / SHC (2WD, Cab)	M6S-111SHD (4WD) / SHDC (4WD, Cab) / SHDC2 (4WD, Cab)	M6S-111SDS2 (4WD) / SDSC (4WD, Cab) / SDSC2 (4WD, Cab)
Type	Internal cylinder (external cylinder option)		
Control System	Top link		
Lift Capacity (lbs.) (24 in. behind lift point OECD)	3,858 (5,732 optional)		
Rear remotes	2 standard (3rd optional)		

DIMENSIONS AND WEIGHT

Wheelbase	95.9"	
Overall Width (min. tread)	91.5" (Open Station) / 92.5" (Cab)	
Overall Length	163.2"	
Overall Height (top of Open Station / Cab)	105.1" / 105.5"	
Weight (Open Station / Cab) (lbs.)	6,834 / 7,341	8,466 / 8,973



UTILITY AG TRACTORS



M6 Series M6-101-1 | M6-111-1 | M6-131-1 | M6-141-1

	M6-101-1	M6-111-1	M6-131-1	M6-141-1
Engine	V3800-TI-CRS		V6108-TI-CRS	
No. of Cylinders / Aspiration	4 Cylinder 3.8L		4 Cylinder 6.1L	
Total Displacement (cu. in.)	230		374	
Rated Speed (rpm)	2,600		2,200	
Horsepower (gross)*	104.5	114.1	131.6	141.4
Horsepower (PTO)**	82	92	104	114
Fuel Tank Capacity (gal)	50.2			
Alternator (amps)	130			
Transmission – No. of Speeds	Intelli-Shift – 24F/24R (32F/32R w/creep)			
Main Gear Shift	8-speed power shift			
Range Gear Shift	3-speed mechanical			
Shuttle Shift	Microprocessor-controlled electro-hydraulic shuttle			
Max. Traveling Speed (mph)	20.72		22.73	
Main Clutch Type	Multiple wet disc			

* SAE J1995 ** The M6-101 is tested per internal Kubota test. All others tested per OEDC Code 2.

Powerful. Flexible. Optimal.

- > Measuring 65.5" x 61.4", the Grand X Cab offers more headroom and legroom for a higher level of comfort and greater visibility than previous models
- > All M6 models include the 24F/24R Intelli-Shift® Transmission, featuring an 8-speed power shift with a 3-speed hi/mid/low range for 24 gears in forward and reverse
- > Tilt and telescopic power steering
- > When the M6 Series' Work Kruiise is turned on, there is no need for throttle adjustment
- > A Kubota-exclusive bevel-gear front axle ensures easy tight-turning radius and excellent maneuverability
- > M6 series tractors have 18.7 gpm (M6-101/M6-111) and 20.4 gpm (M6-131/M6-141) hydraulic pumps
- > The M6-141 DTSC-F model comes with a front suspended axle which provides the operator with a smoother ride, increased tractor stability, and higher productivity
- > M6 Series new features include:
 - Xpress Restart
 - Shuttle Shift Modulation
 - Stationary PTO
 - Updated Loader Joystick
 - Updated Shuttle Lever



HYDRAULICS

	M6-101-1	M6-111-1	M6-131-1	M6-141-1
3-Point Hitch (Category II)	Telescopic lower link ends, telescopic stabilizers			
Control System	Electronic draft control, lower-link sensing			
Lift Capacity (lbs.) (24 in. behind lift point OECD)	6,834 (9,447 optional)			
Remote Valves (mechanical)	2 standard (3rd, 4th optional) w/built-in flow control			
PTO Speed (rpm)	540/1,000			

DIMENSIONS AND WEIGHT

	M6-101-1	M6-111-1	M6-131-1	M6-141-1
Wheelbase	95.9"		105.9"	105.9" / 105.5"
Overall Width (min. tread)	82.7"		85.8"	
Overall Length	165.4"		171.7"	171.7", 171.3"
Overall Height	109.8"	111.8"		113.2"
Weight (lbs.)	9,601	9,788	10,945	10,945 / 11,387

FRONT LOADER SPECIFICATIONS

	LA1955***	LA2255***
Maximum Lift Height	145.7"	161.4"
Overall Height in Carrying Position	66.9"	74"
Lift Capacity at High Position (full height @ pivot pin) (lbs.)	4,299	4,877
Roll Back Angle	40	
Maximum Dump Angle	63° / 52° (at height position)	60° / 50° (at height position)

*** Euro Quick Attach Coupler Type optional

AG TRACTORS



M7 Series Tractors M7-134 | M7-154 | M7-174

Model	M7-134	M7-154	M7-174
Engine	V6108-CR- TIER 4 FINAL		
Type	Direct Injection with Intercooler turbocharger, water-cooled 4-cycle diesel engine		
No. of Cylinders	4 Cylinder 6.1L		
Total Displacement (cu. in.)	374		
Max Engine Power* (97/68EC) HP@RPM	128 @ 1,900	148 @ 1,900	168 @ 1,900
Boost HP	20	20	5
Rated PTO HP @ 2,000 engine RPM* (OECD Code 2)	100	120	140
Alternator (amps)	200 Amp		
Fuel Tank Capacity (gal)	87		
DEF Tank Capacity (gal)	10		

GRADE	DELUXE	PREMIUM	PREMIUM KVT
Transmission Type	Semi-Powershift		CVT
Main Gear Shift	6-Speed Powershift		CVT
Range Gear Shift	5-Speed Synchronized (GST)		CVT
No. of speeds	F30 / R15 (F54 / R27 w/optional creep)		CVT
Shuttle Shift	Electro-hydraulic shuttle		
Main Clutch	Hydraulic multi-plate wet disc		

* SAEJ1995; OECD Code 2.

M7 Series Tractors: more power, productivity, and comfort with the same Kubota quality, as well as new options and features for your operation.

- > M7 Gen 4 Deluxe models with high-performing CCLS hydraulics, mechanical rear remotes, and optional bar axles. High performance with less electronics and simplified controls
- > 30 x 15 with available factory installed creep for a total of 54 forward gears, transmissions with five ranges and six speeds. Widening the working range for increased in-field performance. Enhanced auto shifting with Range Advance for better travel operation
- > The Kubota V6108 engine has redefined torque curves and operates at a lower RPM
- > Improved KVT transmission control with a more responsive multifunction handle and smoother shuttle operation
- > All M7 Gen 4 tractors have loader-ready features standard
- > Optional front field installed and PTO available on all M7 Gen 4 models
- > 7" K-Monitor and optional 12" K-Monitor Pro add fingertip control for all tractor functions and ISO-BUS compatibility on all Premium and Premium KVT tractors
- > Models Available:
M7-134, M7-154, and M7-174 Deluxe
M7-154 and M7-174 Premium
M7-154 and M7-174 Premium KVT

New features:

- Xpress Restart (Deluxe & Premium)
- Shuttle Shift Modulation
- LED Lights are standard on Premium and KVT, optional on Deluxe
- Stationary PTO
- Multi-Speed Steering
- LM2606 Loader
- Loader Joystick (Deluxe)

HYDRAULICS			
Model	M7-134	M7-154	M7-174
Hydraulic System	Closed center, load sensing (CCLS)		
Pump Capacity (gpm)	29		
3-Point Hitch	Telescopic lower link, Category 3, 3N		
Control System	Electronic draft control / Lower-link sensing		
Lift Capacity at 24" (lbs.)	11,797		
No. of Remote Valves	Deluxe: 3 Standard up to 4 Mechanical Premium and KVT: 4 standard up to 5 Electronic		
Rear PTO Speed (rpm)	540 / 540E / 1000 / 1000E		
Front PTO Speed (rpm)	1,000		
Rear Axle Type	Flanged axle or 110" bar axle		
DIMENSIONS AND WEIGHT			
Overall Length (in.)	188"		
Overall Height (in.)	121.7		
Overall Width (in.)	Deluxe Models: 98.4" or 110" Premium and KVT: 110"		
Wheelbase (in.)	107"		
Weight (lbs.)	14,456		
LOADER			
Model	LM2606 Mechanical self-leveling loader with Z-bar linkage		
COMPATIBILITY			
Control Type	Mechanical (Deluxe), Electronic (Premium/KVT)		
Max. Lift Height at Pivot Pin	167"		
Lift Capacity at 800 mm forward Forward (lbs.) (max. height)	5,765		
Standard Equipment	Third function valve, Single-lever hydraulic quick coupler, Accumulator (KSR: Kubota Shockless Ride)		

AG TRACTORS



M8 Series Tractors M8-181 | M8-201

Built Right. Built Ready.

- The M8 Series is a 200-horsepower tractor engineered to power through a wide range of jobs. From cutting, tedding, raking, and baling hay to material handling, tillage, planting, and more—this durable tractor is built right, built ready for business all year round
- Stay comfortable in the cab with an easily accessible A/C, radio, and lights. The cab provides multiple power and charging outlets for almost any device
- The M8 Series is paired with a formidable Cummins B6.7L Performance Series engine that is available in 180 and 200 horsepower featuring an EGR-free design to enhance fuel efficiency and lower emissions
- The M8 series is customizable to your needs. Combining precision and speed, the M8 comes with reliable hydraulics, and a 3-point hitch that offers flexibility and strength. The 3-point hitch can lift mounted equipment and handle a wide range of implements

ENGINE		
Model	M8-181	M8-201
Engine	Cummins B6.7 Tier 4 Final / Stage V	
No. of Cylinders	6 cylinders	
Fuel Tank Capacity (gal)	99 gallons; 375 Liters	
DEF Tank Capacity (gal)	9 gallons; 35 Liters	
Rated Engine Horsepower* @ 2,100 Engine RPM HP	180	200
PTO		
Rated PTO Horsepower** @ 2,000 Engine RPM HP	145	159
Responsive Power Delivery Boost	Additional 25 HP	
Rear PTO Types	540 6 Spline and 1,000 21 Spline (Optional 1,000–20 Spline)	
Rear PTO Speed (rpm)	540/540E/1,000/1,000E	

Factory estimated rating. Kubota Tractor Corporation and Kubota Canada Ltd. reserve the right to change the stated specifications without notice. This material is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this material. For complete warranty, safety, and product information, consult your local Kubota Dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This material is intended for the United States, US territories, and Canada only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global website. Kubota does not provide parts, warranty, or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.

TRANSMISSION		
Model	M8-181	M8-201
Transmission Type	Semi-Powershift 30F x 15R - 6 Gear 5 Ranges	
KVT	CVT	
Max. Traveling Speed - MPH (KM)	24.8 (40) (Optional 31 (50))	
HYDRAULICS		
Hydraulic System	Closed center, load sensing (CCLS)	
Standard Implement Pump Flow gpm (ℓ/min)	31.7 (120)	
Optional Implement Pump Flow gpm (r/min)	42.2 (160)	
No. of Remote Valves	3 standard, up to 5	
Trailer Brake	(Hydraulic) Optional	
Drawbar Category	CAT III (Optional CAT IIIHD)	
Lift Cap, 24" Behind Lift Points (OECD)' lbs. (kg)	11,200 (5,080)	
Rear 3-Pt Hitch Optional: Lift Capacity (OECD)' lbs. (kg)	13,600 (6,170)	
FRONT 3-PT HITCH		
Front 3-Point Hitch	Optional	
Lift Capacity at Hooks (OECD)' lbs. (kg)	8,818 (4,000)	
REAR AXLE		
Bar Axle 98" Overall Length	Standard	
Bar Axle 118" Overall Length	Optional	
CAB		
K-Monitor	7" K-Monitor Standard, (12" K-Monitor Pro Optional)	
Exterior Lighting	Exterior Lighting Standard 8 Halogen (Optional 12 Halogen) (LED Lighting Optional 12 LED)	
DIMENSIONS AND WEIGHT		
Height in. (mm)	128" (3,250)	
Wheel base in. (mm)	114" (2,895)	
Measurement Avg Shipping Weight lbs. (kg)	19,510 (8,850)	
LOADER		
Model	M77 mechanical self-leveling (MSL)	
Leveling System	Mechanical self-leveling (MSL)	
Control Type	Electrical Joy Stick	
Standard Equipment	Third function valve, Hydraulic valve quick couplers, Accumulator (KSR: Kubota Shockless Ride)	
Max Lift Height	To Pivot Pin in. (mm) 181.2 (4,600) Under Level Bucket in. (mm)	
Lift Capacity**	(Pivot Pin, Max. Height) lbs. (kg) 5,200 (2,360) (800 mm Forward, Max. Height) lbs. (kg) 5,490 (2,490) (Pivot Pin, Ground Level) lbs. (kg) 6,940 (3,150) (800 mm Forward, Ground Level) lbs. (kg) 6,590 (2,990) Breakforce Force (800 mm Forward, Ground Level) lbs. (kg) 10,140 (4,600)	

** Loader lift capacity is limited by GVW and proper ballasting.

UTILITY/SPECIALTY AG TRACTORS



Narrow Models

M4N-071 | M5N-091/111 | M5N-091PK - CAB
M4N-071 | M5N-092/112 - Open Station

Capable. Compact. Nimble.

- › Narrow models (M4N-071 | M5N-091PK | M5N-091/111 Cab | M5N-111 | M5N-092/112 Open Station) measure just 48" outside to outside at rear axle with standard tires
- › The 4WD M5N-091PK (Power Krawler), with its powerful engine and independently oscillating left and right rear tracks, provides excellent traction and sure-footed climbing in vineyards and other hilly terrain
- › Electro-Hydraulic Shuttle Transmission is standard on all M Series models and makes shifting between forward and reverse a smooth and quick operation
- › Bevel gear front wheel drive with bi-speed turn on the M Series narrow tractors delivers strength, maneuverability, and durability
- › Automatic 4WD braking on all M4N/M5N models from 2WD mode
- › The M4N and M5N have a V3800 Tier 4 engine, increased alternator capacity, larger radiator, larger diameter cooling fan, and RPM memory for repetitious actions compared to previous models
- › To promote operator efficiency, all main controls are on the right-hand side of the operator while the steering wheel now has up to 25 degrees of tilt
- › Tracks offer an alternative to keep the narrow profile of the tractor while in the field

Narrow Models

	M4N-071 HD12 / HDC12	M5N-091PK Power Krawler	M5N-091HDC12 M5N-091HDC24 M5N-092HD12 M5N-092HD24	M5N-111HDC12 M5N-111HDC24 M5N-112HD12 M5N-112HD24
Engine Type (Kubota, liquid-cooled, diesel)	CRS, Direct Injection, 4-cylinder, turbocharged, Tier 4	CRS, Direct Injection, 4-cylinder, turbocharged w/ intercooler, Tier 4		
Horsepower (gross)*	72.6	92.5		105.7
Horsepower (PTO)**	61	78	HD(C)12: 78 HD(C)24: 75	HD(C)12: 91 HD(C)24: 88
Displacement (cu. in.)	230			
Alternator (amps)	100 (130 opt. on cab model)	80 (130 opt. on cab models)		
Transmission (fully synchronized)	F12/R12 (F18/R18 w/ creep)		HD(C)12: F12/R12 (F18/R18 w/ creep) / HD(C)24: F24/R24 (F36/R36 w/ creep)	
Height (top of hood / cab)	54.7" / 90.2"	N/A / 93.3"	59.8" / 90.2"	
Overall Width (ROPS / cab)	51.6" / 53.9"	N/A / 48"	53.5" / 53.9"	
Overall Length	147.6" / 149.2"		155.5"	
Crop Clearance (front axle)	12" (ROPS) / 14.6" (cab)			
Wheelbase	83.9"			
Tractor Weight (ROPS/cab) (lbs.)	5,049 / 5,291	N/A / 7,275	5,357 / 5,622	

* SAE J1995; ** OECD Code 2



UTILITY/SPECIALTY AG TRACTORS



Low-Profile¹ Models M5L-111 | M6L-111

Robust. Anchored. Gentle.

- › Designed specifically for fruit and nut orchard applications, the M Series low-profile tractors are versatile enough to be used in poultry operations where low clearance operation is required
- › The M5L and M6L are equipped with a Kubota turbocharged V3800 Tier IV Final engine, which has a common rail system (CRS), intercooler, and exhaust gas recirculation (EGR), as well as a diesel particulate filter (DPF) and a selective catalytic reduction (SCR) system
- › An RPM Memory switch recalls preferred engine RPM with the touch of a button, and Constant RPM Management keeps the engine speed constant for stable operation
- › To promote operator efficiency and comfort, all controls are conveniently located on the right side, the floor pedals have been adjusted for better comfort, and the floor area has been increased along with ergonomic steps
- › Right-hand steel operator's guard helps keep low-hanging branches from coming into contact with the operator or critical controls
- › Kubota continues to use heavy-duty, wide steel fenders along with a steel sloping hood designed to reduce crop damage and gently deflect the branches of trees while protecting the operator and key controls
- › Lowered ROPS frames reduce the total height of the M5L to 66.3" and the M6L to a height of 89" with standard tires

Low-Profile¹ Models

	M5L-111	M6L-111
Engine Type (Kubota, liquid-cooled, diesel)	V3800-TIEF4, CRS, Direct Injection, 4-cylinder, turbocharged, w/intercooler	
Horsepower (gross)*	105.6	114.1
Horsepower (PTO)**	89	95
Displacement (cu. in.)	230	
Alternator (amps)	60 (80 amp opt.)	80
Transmission (fully synchronized)	F12/R12 (F18/R18 w/creep)	F32/R32 (F48/R48 w/creep)
Traveling Speed (mph)	20.1	0.86–18.56
Height (front of hood)	90.6" (ROPS) / 66.3" (ROPS folded)	89.4" (ROPS)
Overall Width	77.6"	83.5"
Overall Length	155.9"	163.2"
Crop Clearance (front axle)	16.3"	18.5"
Wheelbase	88.6"	95.9"
Tractor Weight (lbs.)	5,908	7,077
Front Loader	LA1854	LA1944A

* SAE J1995; ** OECD Code 2.



UTILITY/SPECIALTY AG TRACTORS



High-Clearance Models M6H-101

Elevated. Maneuverable. Agile.

- › The M6H-101 is designed for high crop clearance. With 25.8" ground clearance the M6H-101 will clear crops, and ensure less damage, meaning more productivity for you
- › Slow ground speed is key in most high-clearance, specialty crop applications — with a standard, factory-installed creep speed, the M6H-101 has a minimum ground speed of 0.11 MPH at rated engine RPM
- › A 24-speed transmission gives the operator a wide variety of speed selections—from creep speed in the field to high range on the road, the M6H's 3-range, 8-gear transmission will match the proper speed to the task being taken on
- › A left-hand, electro-hydraulic shuttle makes changing directions simple with fingertip control
- › The M6H-101 comes with two standard rear remote valves, a self-canceling detent, and float detent — with 17.6 gpm of hydraulic flow, the M6H is ready to be productive, straight from the factory

High-Clearance Models

M6H-101

Engine Type (Kubota, liquid-cooled, diesel)	V3800-TIEF4, 4 cylinders in-line, common rail system, direct injection, DPF, DOC, SCR
Horsepower (gross)*	104.4
Horsepower (PTO) at rated engine RPM	84
Displacement (cu. in.)	230
Alternator (amps)	80
Transmission (fully synchronized)	F24/R24 w/creep
Traveling Speed (mph)	0.11–16.37
Overall Height (ROPS unfolded)	111.6"
Overall Width	79.9"
Overall Length	168.3"
Minimum Ground Clearance***	25.8"
Wheelbase	95.3"
Standard Tire Size	13.6-38
Tread Width (front)***	61.6", 65.6", 72.0", 75.8", 79.7"
Tread Width (rear)***	60.8", 64.8", 73.4", 77.2", 81.1"
Weight (lbs.)	8,157



* SAE J1995 ***When standard tires are equipped



Disc Mowers

DM1017 | DM1022 | DM1024 | DM2028 | DM2032
DM3087 | DM4032 | DM5028 | DM5032 | DM5040

The tough and reliable Disc Mower Series is built with no compromises for maximum cutting performance.

- › Fully-welded cutterbar with overlapping C-channels
- › With three blades and counter-rotating discs, Kubota mowers have one blade in the crop at all times. This makes for a cleaner cut, uses less horsepower, and prolongs blade life
- › Even number of counter-rotating discs allows for improved overlap and a smooth, even crop flow
- › Specially machined gears with a rounded design and long teeth allow for quiet operation and efficient smooth power transmission
- › DM Series disc mowers offer flexible suspension, well-suited for work on slopes and hilly conditions
- › DM5000 Series mowers offer larger working widths, while their trailed-type design is ideal for lower HP tractors
- › All disc mowers come with a two-year limited warranty and a three-year limited warranty on gear boxes and cutterbars

Disc Mowers

	DM1017	DM1022	DM1024	DM2028	DM2032	DM3087	DM4032	DM5028	DM5032	DM5040	
Cutting Width	5' 6"	7' 2"	7' 10"	9' 2"	10' 6"	28' 7"	10' 6"	9' 2"	10' 6"	13' 1"	
Weight (approx., lbs.)	915	1,058	1,091	1,426	1,508	3,420	1,566	2,734	2,756	2,778	
Transport Width	3' 9"		4' 7"			9' 7"	9' 10"	8' 6"	9' 10"	12' 5"	
ATTACHMENT											
Hitch Option	Cat. I	Cat. II				Cat. II, III	Cat. II				
Drawbar Hitch	Not Applicable						Standard				
PTO (rpm)	540				1,000		540				
Min. PTO Horsepower Req.	36	42	46	50	55	120	40	45	65	85	
OPERATION											
Number of Discs and Blades	4/12	6/18		8/24		16/48		8/24		10/30	
Remotes	1				2		1	2			
Cutterbar Operating Range	±45°			±35°			±17°				
Stubble Height	0.78"–1.97"						1.25"–3.25"				
OPTIONAL EQUIPMENT											
Swath Boards (RH)	Standard					Optional					
Swath Discs (RH/LH)	Optional / Not Applicable					Optional / Optional		Not Applicable			
High Skids	Standard / Optional / Optional					Optional		Standard / Optional / Optional			
Road Lighting Kit	Optional					Standard					

A Frame Mounting Kit required for DM4032. Not needed for all other models.





Trailed Disc Mower Conditioners

DMC8028T | DMC8028R | DMC8032T | DMC8032R | DMC8032RS
DMC8036T | DMC8036R | DMC8036RS | DMC8532T | DMC8532R
DMC8532RS | DMC8536T | DMC8536R | DMC8536RS | DMC8540T
DMC8540R | DMC8540RS | DMC8547T | DMC8547R | DMC8547RS

Kubota Disc Mower Conditioners feature a full range of side pull and center pivot models, along with industry leading features, for quick & efficient hay harvesting.

- › DMC8000 and DMC8500 Series range from 9' 2" to 15' 6" working width
- › Choose between a left-hand drawbar or center pivot models
- › Long, curved gears run smoothly in oil and make for a low-noise cutterbar
- › Counter-rotating discs help improve overlap and ensure an even flow of crop into the conditioning unit
- › Full width conditioning helps ensure an evenly conditioned crop as well as a consistent windrow
- › The welded cutterbar is protected with built-in shear protection in each hub, providing optimal protection from contamination reaching the internal gears
- › With three blades and counter-rotating discs, Kubota mowers have one blade in the crop at all times
- › Kubota's patented SemiSwing tine conditioning system allows for more consistent conditioning action in a wide variety of crop conditions
- › Chevron roller conditioners with full width conditioning provide gentle yet effective conditioning of fragile crops
- › All DMCs come with a two-year limited warranty and a three-year limited warranty on gear boxes and cutterbars*

* See Kubotausa.com for more details.



Disc Mower Conditioners

	DMC 8028T	DMC 8028R	DMC 8032T	DMC 8032R	DMC 8032RS	DMC 8036T	DMC 8036R	DMC 8036RS
Drawbar	Left Hand							
Conditioner	Semi Swing	Roller cond.	Semi Swing	Roller cond.	Steel Rollers	Semi Swing	Roller cond.	Steel Rollers
Cutting Width	9' 2"		10' 6"			11' 5"		
Weight (approx., lbs.)	4,354	4,712	4,20	4,817		4,736	4,938	
Transport Width	8' 10"		9' 8"			11' 2"		
ATTACHMENT								
Hitch	Drawbar Hitch Standard / Cat. II Swivel Hitch Optional					Cat. II Swivel Hitch Standard / Drawbar Hitch Optional		
PTO (rpm)	540 Standard / 1,000 Optional							
Min. PTO Horsepower Req. (hp/kW)	70/50		80/60					
OPERATION								
Number of Discs	8				10			
Remotes Double Acting	2							
Stubble Height	1.25"–3.25"							
Cond. Rotor Speed	900/600	900	900/600	900		900/600	900	
Tires	31 x 13.5 - 15 Standard							
OPTIONAL EQUIPMENT								
Wide Spreading Kit	Optional							
High Skids	Optional							
Lighting Kit	Standard							
Alternative Cond. Speed Kit	1,015/500	1,200/750	1,015/500	1,200/750		1,015/500	1,200/750	

HAY TOOLS



Disc Mower Conditioners

	DMC 8532T	DMC 8532R	DMC 8532RS	DMC 8536T	DMC 8536R	DMC 8536RS	DMC 8540T	DMC 8540R	DMC 8540RS	DMC 8547T	DMC 8547R	DMC 8547RS
Drawbar	Center Point											
Conditioner	Semi Swing	Roller cond.	Steel Rollers	Semi Swing	Roller cond.	Steel Rollers	Semi Swing	Roller cond.	Steel Rollers	Semi Swing	Roller cond.	Steel Rollers
Cutting Width	10' 6"			11' 5"			13' 1"			15' 5"		
Weight (approx., lbs.)	5,225	5,401		5,349	5,546		5,513	5,976		7,365	7,585	
Transport Width	9' 10"			11' 2"			12' 6"					
ATTACHMENT												
Hitch	Cat. II Swivel Hitch Standard / Drawbar Hitch Optional											
PTO (rpm)	540 Standard / 1000 Optional			1,000 Standard / 540 Optional						1,000 Standard		
Min. PTO Horsepower Req. (hp/kW)	90/60						100/74			120/90		
OPERATION												
Number of Discs	8			10						12		
Remotes Double Acting	2											
Stubble Height	1.25"–3.25"											
Cond. Rotor Speed	900/600	900	900/600	900	900/600	900	900/600	900	450/600/900	900/1,200		
Tires	31 x 13.5 - 15 Standard											
OPTIONAL EQUIPMENT												
Wide Spreading Kit	Optional											
High Skids	Optional											
Lighting Kit	Standard											
Alternative Cond. Speed Kit	1015/500	1200/750		1015/500	1200/750		1015/500	1200/750		1015/500		



Mounted Disc Mower Conditioners

DMC6332R | DMC6332T | DMC6336TVARIO
DMC63100R | DMC63100T | DMC7332R
DMC7332T | DMC7336R | DMC7336T

- › DMC7300 front and DMC6300 rear 3-point series mowers range from 10' 6" to 33' 6" working width
- › The welded cutterbar is protected with built-in shear protection in each hub, providing optimal protection from contamination reaching the internal gears
- › Long, curved gears run smoothly in oil and make for a low-noise cutterbar
- › With three blades and counter-rotating discs, Kubota mowers have one blade in the crop at all times. This makes for a cleaner cut and uses less HP
- › Counter-rotating discs improve overlap and helps to ensure an even flow of crop into the conditioning unit
- › Full width conditioning helps ensure an evenly conditioned crop as well as a consistent windrow
- › Kubota's patented SemiSwing tine conditioning system allows for more consistent conditioning action in a wide variety of crop conditions
- › Chevron roller conditioners with full width conditioning provide gentle yet effective conditioning of fragile crops
- › All DMCs come with a two-year limited warranty and a three-year limited warranty on gear boxes and cutterbars

* Visit <https://www.kubotausa.com/service-support/warranty/limited-warranty>

Disc Mowers Conditioners

	DMC 6332R	DMC 6332T	DMC 6336T VARIO	DMC 7332T*	DMC 7332R*	DMC 7336T*	DMC 7336R*	DMC 63100T	DMC 63100R
Conditioner	Roller cond.	Semi Swing		Roller cond.	Semi Swing	Roller cond.	Semi Swing	Roller cond.	
Cutting Width	10' 6"		11' 5"	10' 6"		11' 5"		32'–33' 6"	
Weight (approx., lbs.)	3,219	3,086	3,351	2,756	2,835	3,042	3,175	6,798	7,033
Transport Width	9' 10"			11' 6"			9' 6"		

ATTACHMENT

Hitch	Category II								
PTO (rpm)	1,000								
Min. PTO Horsepower Req. (hp/kW)	90/66		120/90		75/55		80/60		200/150

OPERATION

Number of Discs	8		10		8		10		2x10
Remotes	2			1			1 Power Beyond		
Stubble Height	1.25"–3.25"								
Cond. Rotor Speed	950	1,000/700		1,000			950	1,000/700	950

ACCESSORIES

Wide Spreading Kit	Optional								
High Skids	Optional								
Lighting Kit	Standard								
Alternative Cond. Speed Kit	1,200/750	1,015/500							

* A Frame Mounting Kit is required for DMC7332 and 7336. Not necessary for all other models.





Tedders

TE4052T | TE6576C | TE8590C | TE10511C | TE12513C | TE14515C

Speed up your drying process with Kubota's versatile range of FarmLine and ProLine tedders.

- › Kubota tedders have working widths that range from 17' 1" to 36' 1"
- › Our symmetric Kubota Super-C tines allow for an efficient and even-spread crop flow that help ensure a uniform and consistent drying of crop
- › Kubota Super-C tines are made from 0.39" shot-peened spring steel; the spring coil diameter has a 20% larger diameter than conventional designs
- › FarmLine tedders are fitted with a one-time per season maintenance gearbox and the ProLine series is fitted with a maintenance free gearbox
- › Kubota's FarmLine tedders feature a pull-type design, making it the ideal tool for low-horsepower tractors
- › Kubota's ProLine tedders offer unique transport solutions — with hydraulically controlled transport wheels, these machines can quickly move from one field to another

Tedders

	TE4052T	TE6576C	TE8590C	TE10511C	TE12513C	TE14515C
Kubota Model	FarmLine	ProLine	ProLine			
Working Width	17' 1"	25' 7"	29' 6"	36' 9"	43' 11"	51' 2"
Transport Width	9' 6"	9' 9"	9' 6"	9' 7"	9' 8"	
Transport Length	9' 6"	14' 9"	13' 8"	13' 9"	22' 2"	
Storage Height	8' 8"	13' 7"	12' 2"	12' 9"		
Weight (approx., lbs.)	1,014	2,822	3,747	4,905	8,378	9,150
Capacity Theor (acres/h)	10.4	15.1	7.2	9.8	10.7	12.5

ATTACHMENT

3-Point, Trailing	N/A					
Linkage Drawbar	Standard	N/A				
2-Point, Linkage Arms	N/A	Category II			N/A	
Vibration Damper/Integral Lock	N/A		Standard	N/A		
Linkage Drawbar Eye	N/A				Standard	

ROTORS, TINES, GUARDS

Number of Rotors	4	6	8	10	12	14
Number of Tine Arms/Rotor	6	7	6			
Tine Adjustment System	Standard					
Adjustment of Spreading Angle	N/A	Standard				
Cab Contr. Border Tedding System – Mech.	N/A					
Cab Contr. Border Tedding System – Hydr.	N/A	Standard				
Reduc. Gearbox for Night Swaths	Optional					

TIRES, AXLES, LIGHTS

Running Wheels	18.5 x 8.5-8		16 x 6.5-8			
Tires on Central Unit	N/A		18.5 x 8.5-8		N/A	
Transport Wheels	N/A	10/75 - 15.3"			11.5/80 - 15.3"	15/55 - 17"
Front Wheel (16 x 6.5-8)	N/A		Optional (Tandem)	Optional	N/A	
Tandem Axles	Optional	N/A	Optional		N/A	
Warning Panels	Optional	N/A	Standard		N/A	
Warning Panels w/ Integrated Lighting	Optional	Standard				



Rotary Rakes

RA1035 | RA1042T | RA1047T | RA2071T EVO
RA2072 | RA2076 | RA2577 | RA2584

Kubota-patented TerraLink frame system helps to ensure complete gathering of the crop and ideal windrows in virtually any crop and condition.

- › Kubota rakes are equipped to perform with up to 13 double tangential tine arms and up to five double tines per arm, which ensures a uniform swath for faster drying and even feeding into the baler
- › Kubota's rakes feature the TerraLink Quattro flexibility system, which allows the rake to follow a variety of ground contours
- › All FarmLine rakes feature 0.35" wire diameter tines
- › A maintenance-friendly FarmLine rotor head operates within a fully enclosed oil-filled housing
- › All ProLine rakes feature heavy-duty 0.39" diameter wire tines
- › All ProLine machines come standard with the renowned, fully-enclosed gearbox and its maintenance-free oil bath solution
- › With the ability to make either one or two windrows, the RA2071T EVO can make two smaller windrows in heavy crop conditions or one windrow in light crop conditions
- › Kubota's center delivery rake models feature rear-controlled steering, allowing the rake to make headland turns of up to 80 degrees

Rotary Rakes

Kubota Model	FarmLine				ProLine			
	RA1035	RA1042T	RA1047T	RA2071T EVO	RA2072	RA2076	RA2577	RA2584
Working Width	11' 6"	13' 9"	15' 5"	9' 10"–22' 3"	20' 4"–23' 7"	23'–25' 7"	25' 3"	24' 11"–27' 7"
Transport Width	5' 9"	6' 7"	7' 10"	9' 10"	9' 2"		9' 9"	
Transport Length	11'	13' 2"	15' 9"	26' 11"*	19' 4"			20' 6"
Transport Height	5' 7"	7' 7"	8' 8"	7' 10"–9' 6"	12' 8"	11' 4"* / 13' 5"	12' 4"* / 14' 5"	11' 4"* / 13' 5"
Weight (lbs.)	926	1,257	1,466	2,976	3,430	3,616	5,049	4,299
Swath Width	N/A	N/A	N/A	N/A	3' 11"–6' 7"	4' 3"–7' 3"	N/A	4' 3"–7' 3"

HITCHING SYSTEM

Pivoting 3-Point Headstock	Category II				N/A			
Lower Links (2-point)	N/A				Standard			
Linkage Drawbar	N/A	Standard			N/A			
Gauge Wheel 16°	Optional		N/A	Optional	N/A			

ROTORS/TINE ARMS/TINES

Rotor Diameter	9' 2"	11'	12'	9' 8"	11'		12'	
Swath Delivery	Left		Slide	Left or Center	Center		Left	Center
Number of Rotors	1			2				
Number of Arms/Rotor	10	11	12	11/12	11		12/13	2 x 12
Number of Double Tines/Arm	4						4/5	4
Tine Diameter	0.35"						0.39"	
Detachable Tine Arms	Standard				N/A	Standard		
Height Adjustment	Mechanical			Hydr./Mech.	Mechanical			

WHEELS AND AXLES

Tires (rotors)	16 x 6.50-8	18.5 x 8.50-8			16 x 6.50-8			
Fixed Tandem Axle	Optional	Standard		(rear) Optional	Optional		N/A	Optional
Pivoting Tandem Axle	N/A							
Stand. Tires (carrying frame)	N/A				10.0/75-15.3		380/55-17	

OPTIONAL EQUIPMENT**

Warning Panels	Optional			Standard				
Road Lights	Optional			Standard				

* With detached tine arms and lowered headstock

** See Dealer for additional optional equipment



Wheel Rakes

RA108CR | RA110CR | RA210CR | RA212CR

The Kubota RA Series wheel rakes are fast and productive for handling dry hay in small to mid-size operations.

- › Transport is easy on the road or through narrow gates and openings. Ranging in transport widths from 9' 2" to 9' 6"
- › The 200 Series features easy multi-point adjustments for precise windrow formation, utilizing pins and the unit's implement jack
- › Adjustable for 12 different tractor drawbar heights to ensure proper working angles of the rake wheels
- › Independent wing cylinder lockouts allow for single sided, left, or right-only raking, and provide secure transport mode when both sides are engaged
- › Individual rake wheel suspension is ideal for rough and uneven hay fields, allowing each wheel to act independently and follow ground contour



Wheel Rakes

	RA108CR	RA110CR	RA210CR	RA212CR
Transport Length	21' 2"		24' 10"	
Working Length (Max)	21' 6"		25' 4"	
Transport Width	9' 4"	9' 6"	9' 2"	9' 3"
Transport Height, Min.	8'		8' 4"	
Transport Height, Max.	8' 5"	8' 9"	9' 7"	9' 11"
Min. Working Width	15' 8"	18' 4"	18"	21"
Max. Working Width	16' 8"	20' 4"	21'	25'
Min. Window	34"		36"	
Max. Window	72"		89"	
Working Height	55"			
Typical Weight w/o Options	1,460	1,640	1,790	1,970
Wing Spread	N/A		One hole changes window and working width 6"-7"	
Hydraulic Circuits	Closed-center or Open-center, one remote			
Hydraulic Power Required	1,880 psi 10 gpm			
Minimum Tractor HP	30	40	40	50
Counterbalance Valve	Optional		Standard	

See Dealer for optional equipment



Balers

BV4160 | BV4180 | BV4580 | BV5160 | BV5160N | | BV5160RN | BV5200
BV5200RN | BV5200NET

Leverage decades of experience in the round baler industry.*

- › All Kubota Balers, come equipped with Intelligent Density 3D that gives you the ability to adjust the bale density in three areas to match any crop or crop condition
- › All balers come silage ready
- › Kubota's BV5160 SC14, BV5160RN, BV5200RN, and BV5200 SC14 hydraulic drop floor enables the operator to clear blockages easily from the tractor cab
- › The Kubota BV5160/BV5160N and BV5200RN are equipped with the SuperCut-14 knife roller — an ideal solution for silage applications — featuring a chopping length of 2.75" that produces dense, finely chopped bales that reduce mixing time and are more digestible for nutrient absorption for livestock
- › Kubota's BV4160 and BV4180 models are fitted with an efficient fork feeder intake system, which provides direct feed into the bale chamber, allowing for fast and efficient baling
- › Kubota's balers that are equipped with the front mounted PowerBind net wrap technology are time efficient and feature simple loading, routing, and net that is applied tight on the bale time after time
- › The BV4580 round baler features a low-profile 86" wide pickup designed to deliver high crop volumes into the full-width rotary feeding system, producing high quality 5' x 6' bales
- › The Kubota BV5160RN and BV5200RN are equipped with a rotor intake—ideal for silage applications where chopping is not needed or working in high volume crops for silage or dry hay

* Kverneland Group was founded in 1879 and acquired by Kubota in 2012

Balers

	BV4160	BV4180	BV5160RN	BV5160 SC14	BV5200 SC14	BV5200RN	BV4580
Length	176"					187"	
Width	99"					116"	
Height	106"	112"	108"		111"		112"
Weight (lbs.)	4,842	5,842	6,614	7,055	7,849	7,275	
BALE CHAMBER							
Diameter Min.	31"		24"			31"	
Diameter Max.	65"	71"	65"		78.5"		60"
Bale Width	47"					62"	
Bale Formation	5 belts + 3 rollers						8 belts + 3 rollers
Endless Belts	N/A		Standard			N/A	
PICK-UP							
Working Width	79"		86"				
Number of Tine Rows	4		5				
Tine Spacing	2.36"						
Wind Guard	Crop Deflector		Roller Wind Guard				
Pneumatic Gauge Wheel	(2) Standard						
INTAKE SYSTEM							
Open Throat	Standard		N/A			Standard	
Intake System	Feeder Fork		Rotor			Easy Feed	
SuperCut-14 Knives	N/A		Standard		N/A		
Knife Group Selection	N/A		Standard		N/A		
Unblocking System	N/A		Hydraulic Drop Floor			N/A	
DRIVELINE							
1¼" Chains	Standard						
W-A PTO Shaft	Standard						
Shear Bolt Protection	Standard		N/A			Standard	
Cam Clutch Protection	Standard						
BINDING							
Twine Only	N/A						
Net Only	Optional	BV5160RN		Optional	BV5200RN	Optional	
Twine and Net	Optional	N/A		Optional	N/A	Optional	
OPERATIONS							
ISOBUS	Optional		Standard			Optional	
Operating Terminal	Focus 3		Tellus GO			Focus 3	
IsoMatch Tellus	Optional						
Hydraulic Outlets	Standard						
PTO (rpm)	540					540/1,000	
Min. Power Requirement (PTO hp)	55	60	75			70	
WHEELS AND AXLES							
Standard Wheel Size	PREM 31 x 13.5 x 15 Std.	PREM 31 x 13.5 x 15 Std.	31 x 13.5 x 15 Std.			14L-16.1SL	
Optional Wheel Sizes	Optional		19L-16.1SL			16.5-16.1SL, 19L-16.1SL	



Wrappers

WR1100C | WR1400CM | WR1600C

With remote-controlled, three-point mounted and trailed turntable wrappers, the perfectly wrapped bale is right at hand.

- › The entire wrapping process of the Kubota WR1100 can be controlled via standard handheld remote from the loading tractor
- › The Kubota WR1100 is ideal for “wrap and stack” operations, as it can be mounted on the rear or front hydraulics of the tractor, or used as a static machine with an external power pack unit
- › For smaller tractors, the extendable wheel arm of the Kubota WR1400 and WR1600 allows bales up to 2,200 and 2,650 lbs. respectively
- › Turntable with two driven rollers is designed for high bale stability and smooth, even rotation
- › The low design of the Kubota WR1400 and WR1600 ensures fast and gentle unloading of the bale with no need for an extra fall damper
- › The Kubota WR1600C is a high capacity wrapper, capable of wrapping one bale while carrying another one; it features two film applicators that reduce your wrapping time

Wrappers

	WR1100C	WR1400C	WR1400M	WR1600C
Transport Length	8' 10"	14' 12"	14' 2"	14'
Transport Width	5' 4"	8' 4"		8' 10"
Transport Height	69"	76"		81"
Weight (lbs.)	1,653	2,095		4,233

BALE

Max. Bale Size (L x D)	4 x 5			
Max. Bale Weight (lbs.)	2,646		3,307	

WRAPPING TABLE

Mounted Wrapper	Standard	N/A		
Pull-Type Wrapper	N/A	Standard		
Support Rollers/Belts	2/4			
Automatic Film Cutter	Standard			
Max. Wrapping Speed (rpm)	30			

PRE-STRETCHER

Pre-stretcher 29.5" (750 mm)	Standard		N/A	
Double Pre-stretchers 29.5" (750 mm)	N/A		Standard	

OPERATIONS

Manual Cable Control (M)	N/A		Standard	N/A
Programmable Computer (C)	Standard		N/A	Standard/ Joystick
Remote Control (C)	Standard	N/A		
Oil Consumption (gal/min)	7.4 (gal/min)			

WHEELS AND AXLES

10.0/80-12	N/A	Standard		N/A
15.0/55-17	N/A		Standard	

OPTIONS

Bale and Wrap Counter	Standard			
Auto-stop at End of Cycle	Standard			
Film End/Tear Sensor	Optional			
Road Lights	N/A	Optional		
Spare Film Holder	Optional			



VS Series

VS220 | VS600

The VS Series offers a unique pendulum spreader range for maximum accuracy, spreading quality, and ease of operation.

- > Pendulum movement of the spout ensures the application rate is always identical on both sides for excellent overlap
- > Available with manual control, hydraulic remote control from the cabin, or electronic control from the cab enables variable speed continuous adjustment
- > Minimum wind influence on the spreading pattern helps ensure the tractor does not get covered with fertilizer
- > Setting the application rate with the easy-to-read scale allows accurate adjustments in kilograms or pounds per acre, minimizing the risk of spreading errors
- > Low filling height makes refilling fertilizer easy, as the hopper can be moved under a tipping trailer or silo, or filled by hand
- > Agitator ensures an even material feed to the spreading unit, so there is less risk of crushing the fertilizer
- > Many different spouts and stainless liners available for spreading a variety of products

VS Series

	VS220*	VS600*
Basic Unit	N/A	N/A
Hopper Capacity (lbs.)	485	1,300
Hopper Capacity (cu. ft.)	7.8	21.2
Hopper Width	42"	69"
Filling Height	30"	38"
Weight (lbs.)	183	327
Required PTO HP	10	35
Hitch Category	Cat. I	Cat. II

* Spreads both powder and granules



TRACTOR LOADER BACKHOES



Loaders / Landscapers

B26 | L47 | M62

Our unique lineup of Tractor Loader Backhoes is engineered to save you time and effort on every job.

- › The HST Plus transmission* provides the user with auto throttle advance, hydro dual speed, HST response control, and stall guard plus
- › The throttle-up switch* mounted on the loader joystick allows the operator to increase the hydraulic flow to the front end loader, without increasing vehicle speed
- › Backhoes are quick attach— enabling the optional attachment of Cat. I or Cat. II** 3-point hitch
- › Powered by reliable Kubota diesel engines
- › Backhoe crawling mode* allows the operator to creep forward or backward without repositioning the seat
- › Quick engagement of PTO through electric switch for simple engage and disengagement while operating. Conveniently located, “push and turn” starts, and one push stops the PTO
- › Kubota’s hydraulic 2-lever quick coupler* lets you quickly and easily attach and detach front implements

* Only available on L47/M62 Models

** M62 Models only

Loaders/Landscapers

	B26	L47	M62
Engine Type (Kubota, liquid-cooled, diesel)	E-TVCS, 3-cylinder, Tier 4 Final	EPA Tier 4 Final	
Horsepower (gross)*	23.3	47.1	63
Displacement (cu. in.)	68.5	148.5	
Overall Length (w/ backhoe)	198.0"	233.9"	252.9"
Overall Width (w/ loader)	60"	72.5"	84.8"
Wheelbase	62.2"	72.5"	80.7"
Transmission	Hydrostatic (HST) infinite 3-range	HST Plus 6-range	
Tractor Weight (lbs.) (w/ loader, backhoe, and ROPS/FOPS)	4,001	7,205	8,925

COMPATIBLE IMPLEMENTS

Backhoe	BT820	BT1000B	BT1400
Front Loader	TL500	TL1300	TL1800

BACKHOE SPECIFICATIONS

	BT820	BT1000B	BT1400
Digging Depth	99.8"	121"	169.8"
Loading Height	77.3"	92.9"	130.9"
Bucket Sizes	12", 18", 24"	12–36"	12–36"

FRONT LOADER SPECIFICATIONS

	TL500	TL1300	TL1800
Maximum Lift Height	94.5"	113.9"	126.1"
Lift Capacity (lbs.) at Full Height/Pivot Point	1,301	2,848	3,960
Material Bucket	60"	72"	84"
Loader Feature	Mechanical spill guard	Automatic hydraulic self-leveling	

* SAE J1995



CONSTRUCTION EQUIPMENT



SCL1000

Compact in size and packed with performance, Kubota's Stand-On Compact Loader conquers the toughest of tasks, yet is nimble enough to get into tight spaces.

- › 23.7 HP turbo-charged Kubota engine provides quiet operation, high altitude performance, and requires no DPF
- › Vertical lift loader arms reach higher and further than the competition with a hinge pin height of 84.7" and a reach of 26" (at 45° dump angle)
- › 1,000 lbs. ROC combined with 15 gpm auxiliary hydraulic flow make for a powerful and productive compact utility loader
- › 4.3" color LCD monitor includes Keyless Start with passcode protection and easy-to-read consolidated machine monitoring with service reminders. A convenient 12-volt charging port is also standard
- › The patented T-drive handle provides intuitive and ergonomic steering. Hydraulic pilot-operated loader and drive control valves offer precise and responsive control of the machine
- › Right hand joystick controls loader arm and bucket movement. Auxiliary hydraulics are easily operated without removing your hand from the loader joystick. Continuous flow in either direction is as simple as pushing a button
- › Easy-to-access centralized filters and everyday maintenance items. Dash indicator light alerts when the air filter needs cleaning, and service information is readily available at the touch of a button
- › Heavy-duty cast CII coupler and protective cover for bucket cylinder fittings. CII coupler is standard. Optional welded 2-lever style coupler
- › Works in zero clearance yards with low impact wide track design (4.0 psi) minimizing damage to grass or landscaping with 4.9 mph travel speed
- › Auxiliary hydraulic lines are routed inside the loader arm for optimal protection. Case drain is standard. Auxiliary hydraulic couplers are pressurized

ENGINE	
Engine Type	Water-cooled 4-cycle diesel engine with 3 cylinder, turbo, EPA Tier 4
Model Name	KUBOTA D902-T
Total Displacement)	54.8 cu.in. (898 cm ³)
Engine Power - SAE J1995 Gross	23.7 HP (17.7 kW)
Rated Speed	2,800 rpm
Low Idling Speed	1,250 rpm
DIMENSIONS	
Overall Length - Transport (w/Std Bucket Parallel to Ground)	107.7" (2.74 m)
Overall Length (w/o Bucket)	84.9" (2.16 m)
Overall Height	55.7" (1.41 m)
Overall Width w/Std Bucket	36" (91.44 cm)
Operating Weight (w/o Operator) lbs.	3,035 (1,376 kg)
Rated Operating Capacity (35%)	1,000 lb. (453 kg) ROC
Tipping Load	2,857 lbs. (1,296 kg)
Wheelbase	40.5" (1.03 m)
Hinge Pin Height at Max. Lift	84.7" (2.15 m)
Reach at Max. Lift and 45° Dump	26" (66 cm)
Track Width	9.8" (24.9 cm)
Ground Clearance	7.4" (18.8 cm)
Angle of Departure	25.2°
PERFORMANCE	
Attachment Mounting System	CII (Common Industry Interface) or 2-Lever Quick-Attach
Travel Speed (Fwd/Rev)	4.9 mph (7.9 km/h)
Ground Pressure (with Operator)	4.0 psi, 28.0 kPa (0.28 kgf/cm ²)
Battery Capacity	12V, RC 80, 540 CCA
Auxiliary Hydraulic Flow	15 gal/min (56.7812 L/min)
Auxiliary Hydraulic Pressure	2,800 psi (19.3 mPa) (196.8 kgf/cm ²)
SERVICE & FILL CAPACITIES	
Fuel Tank Capacity	7.75 gal (29.3 L)
Hydraulic System	6 gal (22.7 L)





SSV Compact Skid Steer Loaders

SSV65 | SSV75

Greater power now comes in a smaller package. Our SSV Skid Steer Loader is easier to transport from site to site and easier to maneuver in tight spaces.


- › Increase operator comfort on our spacious cabs
- › The sliding front entry door can be opened or closed regardless of loader position
- › Cabin has an optimized air conditioning and climate control system for year-round operator comfort
- › Move more material faster in applications such as agriculture, construction, and landscaping
- › An optional multi-function lever allows fingertip control of all major vehicle and implement operations
- › The closed cab is radio-ready with speakers, wiring, and antenna standard equipment
- › Flip a switch on the hydraulic quick coupler to hook up or remove attachments without leaving your seat
- › Discover the high performance and productivity of the SSV Series

Skid Steer Loaders

	SSV65	SSV75
Operator Station	Open cab / Closed cab	
Operating Weight (lbs.) (inc. operator weight 175 lbs.)	6,790 / 7,055	8,157 / 8,422
ENGINE		
Model	V2607-CR-TE4	V3307-CR-TE4
Emission Certification	Tier 4	
Gross HP (hp/rpm)*	64/2,700	71.6/2,600
Displacement (cu. in.)	159.7	203.3
Cylinders	4	
Bore Stroke	3.5 x 4.4"	3.8 x 4.8"
Aspiration	Turbocharged	
LOADER PERFORMANCE		
Rated Operating Capacity 50% Tipping Load (lbs.)	1,950	2,690
Tipping Load (lbs.)	3,900	5,380
Hinge Pin Height (Max Lift)	121.5"	123.8"
Breakout Force – Bucket (lbf.)	4,839	5,884
Breakout Force – Lift Arm (lbf.)	3,858	4,850
Lift Arm Path	Vertical	
UNDERCARRIAGE		
Standard Tire Size	10x16.5 8PR	12x16.5 10PR
Chain Size ASA#	80	100
Travel Speed – Low (mph)	6.9	7.4
Travel Speed – High (mph)	11.1	11.8
Traction Force (lbf.)	7,339	8,494
Ground Clearance	7.6"	8.1"
HYDRAULIC SYSTEM		
Loader Hydraulic Pressure (psi)	3,271	
Aux. Hydraulic Flow (standard/high) (gpm)	18.0/28.0	20.9/30.4
Hydraulic Tank (gal)	4.2	
Fuel Tank (gal)	25.4	26.9



* SAE J1995

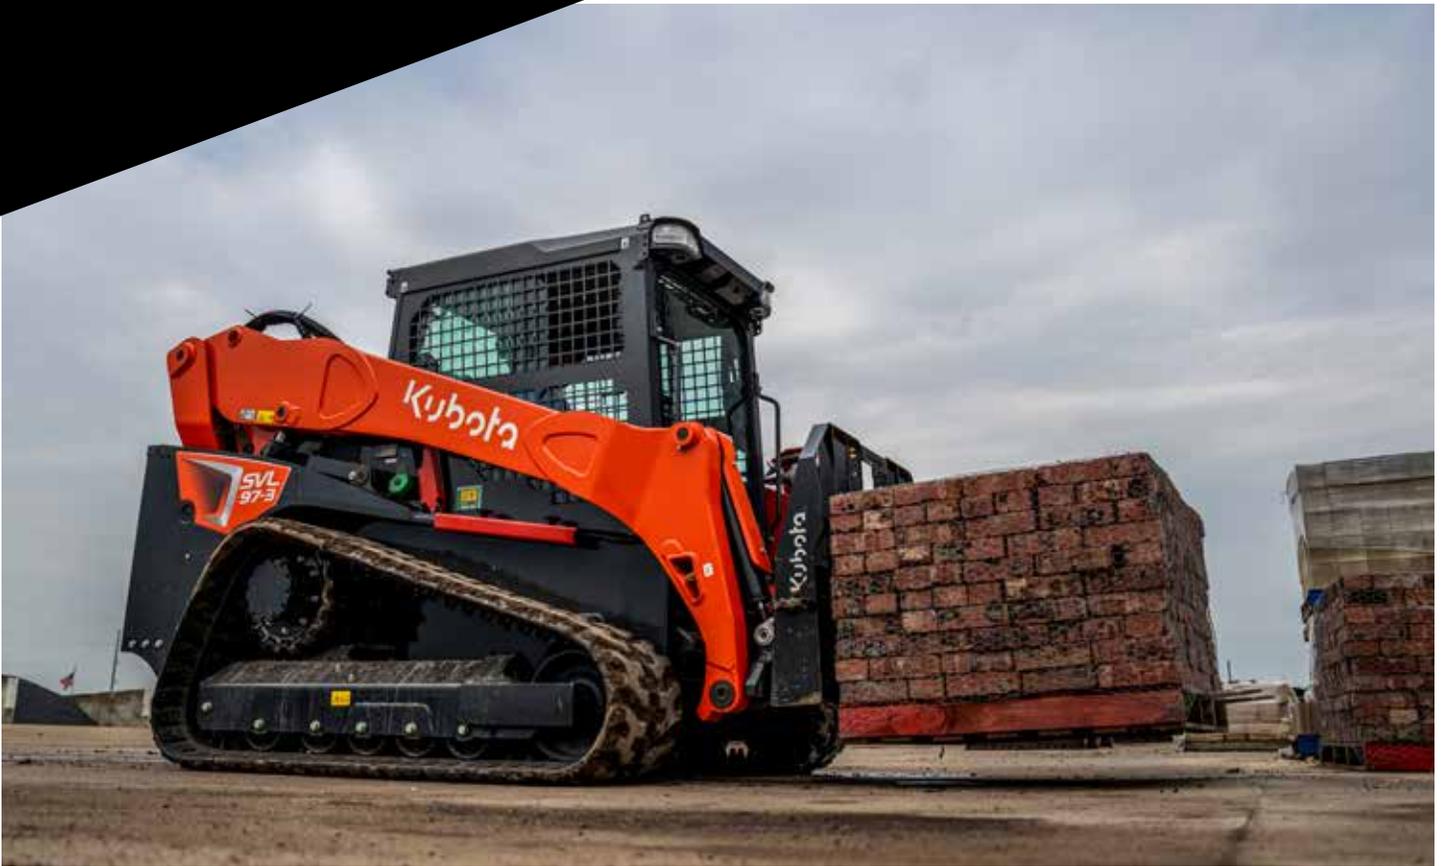

SVL Compact Track Loaders

SVL65-2 | SVL65-2s | SVL75-3
SVL97-3 | SVL110-3

The SVL Series provides powerful breakout force and lifting capacity for groundbreaking new levels of performance and productivity.

- › Powered by 4-cylinder Kubota turbocharged engines with 68.3, 71.6, 96.4, and 112.7* horsepower, these engines are equipped with common rail fuel injection and diesel particulate filters
- › Standard-equipped 2-speed travel and high ground clearance help ensure excellent travel performance on difficult terrain
- › Comfortable and spacious cab area features a luxurious, adjustable full-suspension seat and plenty of legroom
- › Angled track frame cover helps to prevent soil from accumulating during operation
- › Easy maintenance features include a large engine compartment door and well laid out engine compartments providing easy access to battery, filters, and fluid fill locations, simplifying daily routine checks
- › Choose an optional high flow system on the SVL65-2, SVL65-2s, or SVL75-3, and take productivity to a new level. With the high flow system on a SVL97-3 and a SVL110-3, utilize the variable hydraulic flow function to dial in your auxiliary flow for maximum hydraulic attachment performance

SVL65-2s, SVL75-3, SVL97-3 and SVL110-3

- › Kubota WorkSmart Telematics (Standard)
- › Rearview camera (Standard)

Compact Track Loaders

	SVL65-2	SVL65-2s	SVL75-3	SVL97-3	SVL110-3
Engine Type (Kubota, liquid-cooled, diesel)	V2607-CR-TE4 turbocharged 4-cylinder		V3307-TE5A turbocharged 4-cylinder	V3800 CRS-TE4 turbocharged 4-cylinder	V3800-TIE5-LA 4-cylinder
Horsepower (gross)*	68.4		71.6	96.4	112.7
Displacement (cu. in.)	159.6		203.3	230.0	
Overall Length (w/bucket on the ground)	136.4"		142.1"	153.6"	
Overall Height (top of cab)	79.9"		81.8"	83.1"	
Overall Width (w/bucket)	68" / 74"		68"	81"	
Operating Weight (lbs.) (ROPS/cab)	8,090 / 8,48		9,025 / 9,225	11,676 / 11,929	12,322
Operator Station	Open cab / Closed cab				Closed cab

LOADER PERFORMANCE

Rated Operating Capacity (ROC) 35% Tipping Load (lbs.)	2,100		2,490	3,459	3,700
Tipping Load (lbs.)	6,000		7,112	9,700	10,571
Hinge Pin Height (Max Lift)	118.5"		122.7"		128.5"
Breakout Force – Bucket (lbf.)	4,614		6,191	7,650	
Breakout Force – Lift Arm (lbf.)	4,266		4,723	5,288	
Lift Arm Path	Vertical				

UNDERCARRIAGE

Track Width (standard/wide)	12.6" / 15"		12.6" / 15.8"	17.7"	
Ground Pressure (psi) (standard/wide)	4.9 / 4.4		5.8 / 5.9	4.7 / 4.8	4.8
Track Rollers (per side)	4		4	5	
Track Ground Contact Length	57.9"		56.5"	65.6"	
Travel Speed (mph) (low/high)	4.9 / 7.1		5.6 / 8.6	5.5 / 8.4	
Traction Force (lbs.)	8,406		9,678	13,174	
Minimum Ground Clearance	9.1"		11.7"	11.0"	10.9"

AUXILIARY HYDRAULIC POWER

Aux. Hydraulic Pressure (psi)	3,263		3,185	3,553	
Aux. Hydraulic Flow (gpm) (standard/high)	18.5 / 28.1		19.2 / 29.8	23.1 / 41.2	45.0

* SAE J1995

CONSTRUCTION EQUIPMENT



Excavators K008-5 | KX018-4 | KX030-4 | KX033-4

Kubota's compact excavators combine maneuverability, power, and reliability with economy to help you haul away more pay dirt on every job.

- › The KX030-4's operation is aided by two features, the auto downshift feature (high to low) and the dozer blade float for back dragging
- › Compact size increases productivity in confined areas
- › Superior stability with long tumbler distance and wide variable track width (KX018-4) enables you to safely perform jobs using a host of Kubota attachments
- › Variable-width track frame can be hydraulically retracted with the switch of a lever to fit through most doorways (K008-5) and gates (KX018-4)
- › The large cab of the KX018 features ample legroom, adjustable seating, and a wide door to bring comfort to tough work
- › Digital display allows easy access and operation (KX018-4)
- › Two-pattern selection system lets operator choose ISO or SAE operating pattern
- › Easy access makes engine maintenance simple
- › With the stability and lifting capacity of a much bigger machine, the 3-ton KX033-4 offers a level of performance to handle a wide variety of tough excavating jobs

Standard Tail Swing Excavators

	K008-5	KX018-4	KX030-4	KX033-4 ¹
Engine Type (Kubota)	3-cylinder, liquid-cooled, overhead valve, indirect injected, E-TVCS diesel		4-cylinder, liquid-cooled, overhead valve, indirect injected, E-TVCS diesel	3-cylinder, liquid-cooled, overhead valve, direct injected
Engine Model	D722-E4-BH-4US	D902-E4-BH-4US	V1505-E4-BH-3USA	D1703M-DI-E4
Horsepower (gross)²	10.3	16.1	23.3	
Displacement (cu. in.)	44.0	54.8	91.5	100.5
Overall Length (transport)	9' 0"	12' 2.1"	15' 1.1"	15' 6"
Overall Height	7' 4"	7' 7"	7' 11"	8' 1"
Overall Width	2' 10" / 2' 4" ³	4' 3.2" / 3' 3" ³	4' 11"	5' 1"
Operating Weight (lbs.)⁴	2,315	3,747	6,272	7,420
Rear Swing Clearance	12.6"	16.5"	20.9"	18.7"
Maximum Digging Depth	5' 8"	7' 9.7"	9' 9"	10' 6" / 12' 2" ¹
Maximum Dumping Height	6' 8"	7' 9.7"	10' 4"	11' 7"
Pump Capacity (gpm)	5.6	12.0	23.0	26.5
Auxiliary Hydraulic Line Flow Rate (gpm)	5.5	7.4	13.1	15.8
Bucket Breakout Force (lbf.)	2,205	3,594	6,924	8,138
Maximum Traveling Speed (mph)	1.2 / 2.5	1.4 / 2.6	1.7 / 2.7	1.9 / 2.9
Ground Contact Pressure (psi)⁴	4.2	3.7	3.9	4.36
OPTIONAL ATTACHMENTS				
Hydraulic Breaker (ft./lb.)	150 / 200	200	350 / 500	
Hydraulic Thumb	N/A		Optional	
Pin-On Bucket	8"-16"	9"-18"	12"-24"	
Quick-Attach Buckets	N/A	9"-18"	12"-36"	
Quick Coupler	N/A	Mechanical		Mechanical/ Hydraulic Coupler

¹KX033-4 available with an extendable dipper arm; ²SAE J1995; ³Variable width tracks; ⁴Canopy, rubber





Excavators KX040-5 | KX057-5 | KX080-5

Get down to bedrock with these powerhouse excavators. The KX Series has outstanding utility and exceptional operation.

- › Remarkable breakout force of 14,660 lbs. helps ensure high productivity in the toughest applications (KX080-5)
- › Advanced Load-Sensing Hydraulic System provides optimum oil flow to each cylinder, making operation under most loads easier and smoother
- › Hydraulic 6-in-1 blade for KX040-5 angles 25 degrees and tilts 10 degrees to make leveling and backfilling work incredibly easy
- › Oil-flow settings are adjusted and stored via the digital panel for quick retrieval from job to job
- › Superior cabin design features air conditioner, two-pattern selection system, two-speed travel switch, deluxe suspension seat, and retractable seat belt
- › Triple opening covers, ground-level access, and angle track frame give you easy, hassle-free maintenance

KX080-5 Excavators

- › The KX080-5 showcases a 7" LCD color display with an excellent working picture and clear visibility
- › Keyless Start and rearview camera are standard kits for the KX080-5
- › Operator comfort is greatly improved on the KX080-5 with the dual adjustable seat and console as well as a much quieter cab standard when compared to the KX080-4

Standard Tail Swing Excavators

	KX040-5	KX057-5	KX080-5
Engine Type (Kubota)	3-cylinder, liquid-cooled, overhead valve, direct injected, E-CDIS diesel		4-cylinder, liquid-cooled, overhead valve, direct injected, E-CDIS diesel
Engine Model	D1803-CR-TE5-BEH5 / D1803-CR-TE5-BEH6, Meets Tier 4 emission standards (Canopy/Cab)		V2607-CR-E4
Horsepower¹	40.3	47.6	66.6
Displacement (cu. in.)	111.4	159.6	203.3
Overall Length (transport)	16' 8"	18' 1.3"	21' 1.9"
Overall Height	8' 1.8"	8' 4.4"	8' 4"
Overall Width	5' 6.9"	6' 5.2"	7' 2.6"
Operating Weight (lbs.)	9,199 ²	12,346 ²	18,365 ³
Rear Swing Clearance	17.7"	11.4"	14.2"
Maximum Digging Depth	11' 2.3"	12' 9"	15' 1.1"
Maximum Dumping Height	12' 9.5"	13' 7.5"	17' 2.7"
Pump Capacity (gpm)	24.4	39.4	44.6
Auxiliary Hydraulic Line Flow Rate (gpm)	17.2 / 9.8	19.8 / 9.8	26.4 / 17.6
Bucket Breakout Force (lbf.)	9,535	10,172	14,660
Maximum Traveling Speed (mph)	1.8 / 3.1	1.7 / 3.0	1.7 / 3.0
Ground Contact Pressure (psi)	4.53 ²	4.6 ²	5.25 ³

OPTIONAL ATTACHMENTS AND ACCESSORIES

Hydraulic Breaker (ft./lb.)	750	750 / 1,000	1,000 / 1,500
Hydraulic Thumb		Optional	
Pin-On Bucket	12"-36"	12"-48"	18"-60"
Pin Grabber Coupler	N/A	Optional	
Quick Attach Buckets	12"-39"	12"-48"	18"-60"
Quick Coupler	Mechanical/Hydraulic Coupler		Mechanical
Hydraulic Augers	6"-36" / 9"-36"		
Canopy Lights	Optional		
Travel Alarm	Optional		
Angle Blade	Optional		

¹SAE J1995, SAE J1349; ²Canopy, rubber; ³Cab, rubber





Excavators

U10-5 | U17-5 | U27-4 | U35-4 | U48-5 | U55-5

The U Series excavators offer performance, durability, convenience, and comfort to help you tackle tougher jobs in even tighter spaces.

- › Two-pattern selection system lets operator choose ISO or SAE operating pattern
- › Zero and tight tail swing offer excellent balance, stability, and better visibility in confined areas
- › Hydraulic variable-width track frame retracts to fit through gates, expands for stable operation (U10-5/U17-5)
- › Tried-and-true Kubota diesel engine
- › Unique hydraulic system and large-capacity variable displacement pumps deliver exceptional boom, arm, and bucket movements in the industry
- › The U27-4 has a dig depth of 9' 5" and provides one of the largest operator stations in the industry with a tight tail swing design
- › Optional cabs offer spacious operator area with air conditioning, interior light, and windshield wiper/washer for comfortable all-weather operation (U35-4, U48-5, and U55-5)
- › Digital display enhances productivity and makes operation easier

U48-5 and U55-5:

- › 7" LCD color display with an excellent working picture and clear visibility
- › Standard Keyless Start and an optional rearview camera

U-10:

- › The U10-5 has side lever joysticks for easier and more productive excavator operation

Zero and Tight Tail Swing Excavators

	U10-5	U17-5	U27-4	U35-4	U48-5	U55-5
Engine Type (Kubota)	3-cylinder, Tier 4 Final		3-cylinder, Tier 4 Final		4-cylinder, Tier 4 Final	
Engine Model	D722-E4-BH-5US	D902-E4-BH-6EU	D1105-E4-BH-5-KBM	D1703M-DI-E4B	D1803-CR-TE5	V2607-CR-T-E4B
Horsepower¹	10.3	17.0	20.8	23.9	40.4	47.6
Displacement (cu. in.)	44	54.7	68.5	100.5	112	159.6
Overall Length (transport)	9' 9"	11' 7.8"	13' 6"	15' 7"	17' 7"	18' 0.5"
Overall Height	7' 5"	7' 9.3"	7' 11"	8' 1.2"	8' 4"	8' 4.4"
Overall Width	3' 3" / 2' 6"	3' 3" / 4' 3.2"	4' 11"	5' 6.9"	6' 5"	6' 5.2"
Operating Weight (lbs.)³	2,646	3,702	5,688	8,129	10,848	12,247
Rear Swing Clearance	0.6"	0"	1.6"	2"	1.2"	2.5"
Maximum Digging Depth	5' 11"	7' 5.9"	9' 5"	9' 8.9"	10' 8"	11' 11"
Maximum Dumping Height	7' 3"	8' 1.2"	10'	11' 0.7"	12' 9"	13' 1.5"
Pump Capacity (gpm)	5.6	12.3	20.3	26.5	31.4	39.4
Auxiliary Hydraulic Line Flow Rate (gpm)	5.5	7.3	12.7	15.8	17.2	19.8 / 9.8
Bucket Breakout Force (lbf.)	2,337	3,417	7,014	7,924	9,304	10,172
Maximum Traveling Speed (mph)	1.2 / 2.5	1.4 / 2.7	1.6 / 2.7	1.9 / 2.9	1.7 / 3.0	
Ground Contact Pressure (psi)²	4.2	3.8	3.5	4.89	4.0	4.6

OPTIONAL ATTACHMENTS AND ACCESSORIES

Canopy Lights	Optional					
Hydraulic Hammer (ft./lb.)	150 / 200	200	350	350 / 500	750 / 1,000	750
Hydraulic Thumb	Optional					
Pin-On Buckets	9"-16"	9"-18"	12"-24"		N/A	12"-48"
Pin Grabber	N/A					Optional
Quick-Attach Buckets	N/A				9"-16"	
Quick Coupler	N/A	Mechanical		Mechanical/ Hydraulic Coupler	Mechanical	
Spark Arrest Muffler	Optional				DPF	
Steel Tracks	N/A			11.8"	15.7"	
Hydraulic Augers	N/A	6" - 36"				
Travel Alarm	Optional					

¹SAE J1995; ²Variable Width Track; ³Canopy, rubber





Wheel Loaders R430 | R540 | R640

Our highly versatile R Series wheel loaders are equipped with features to offer high visibility, unrelenting power, and productivity for many worry-free years to come.

- › 4-wheel drive, 100% on-demand differential lock, and rear frame oscillation provide excellent traction and stability
- › The ultra-comfortable, enclosed cab ensures year-round comfort with great visibility, a suspension seat, and hanging-type foot pedals. Easy access makes engine maintenance simple
- › Equipped with Kubota's own powerful Tier 4 Final diesel engine
- › Make fast and easy attachment changes with the Quick Coupler

R540/R640 Wheel Loader

- › Excellent visibility thanks to a larger front window, full-size right window (door size), and delta-shaped wheel loader arms
- › Operator comfort - moved console of switches was moved to the right side of the cab, increasing foot and leg space for more operator comfort; R540 multi-function control lever is standard
- › Joystick mounted FnR switch allows on-the-go directional changes without clutching or braking (only on the R540 and R640 models)

Wheel Loaders

	R430 Canopy / Cab	R540 Canopy / Cab	R640 Canopy / Cab
Engine Type (Kubota, liquid-cooled, diesel)	4-cylinder, Tier 4 Final		4-cylinder, Tier 4 Final
Engine Model	D1803-CR-TIE4-WL5	V2607-CR-E5-WL	V2607-CR-TE5-WL
Horsepower (gross)*	47.6	50.9	64.3
Operating Weight (lbs.)	7,749 / 8,223	9,888 / 10,285	11,177 / 11,563
Bucket Breakout Force (lbf.)	5,215	8,183	9,869
Loader Boom Linkage	Hybrid		
Standard Bucket Capacity (cu. yd.)	0.5	0.85	1.0
Tipping Load Straight w/ Bucket (lbs.)	5,335 / 5,743	6,437 / 6,768	7,542 / 7,760
Tipping Load Straight w/ Pallet Forks (lbs.)	3,494 / 3,770	4,960 / 5,202	5,820 / 6,063
Tipping Load Full Turn w/ Bucket (lbs.)	4,596 / 4,949	5,644 / 5,930	6,526 / 6,812
Tipping Load Full w/ Pallet Forks (lbs.)	3,009 / 3,251	4,365 / 4,586	5,115 / 5,313
Rated Operating Capacity (SAE 50% w/ Bucket (lbs.))	1,504 / 1,625	2,822 / 2,965	3,263 / 3,345
Rated Operating Capacity w/ Pallet Forks (lbs.)	2,298 / 2,474	2,183 / 2,293	2,558 / 2,657
Angle of Articulation	40°		
Frame Oscillation	8°		
Dump Clearance	7' 2"	8' 0"	7' 9"
Hinge Pin Height	9' 2"	10' 7"	10' 8"
Reach Fully Raised	2' 10"	2' 7"	2' 9"
Turn Radius (loader clearance)	12' 1"	13' 8"	13' 10"
Turn Radius (tire clearance)	10' 1"	11' 1"	12' 0"
Overall Length w/ Bucket	14' 4"	17' 8"	18' 0"
Overall Width w/o Bucket	5'	5' 7"	5' 11"
Overall Height	8' 3"	8' 1"	8' 2"
Tread	3' 10"	4' 5"	4' 7"
Wheelbase	5' 10"	6' 7"	6' 7"
Auxiliary Hydraulic Flow (gpm)	11.2	14.2	17.8
Brakes – Service	Self-adjusting, enclosed, wet disk		
Brakes – Parking	Spring applied, hydraulic release, wet disk negative brake		
Front/Rear Axle Traction Lock	100% on-demand differential lock		
Transmission Type	HST, 2-speed		
Traction Force (lbs.)	5,485	6,541	8,588
Travel Speed (mph)	0–12.4		
ADDITIONAL ATTACHMENTS AND ACCESSORIES			
Backhoe	Optional - Rear	N/A	
Light Material Bucket (cu. yd.)	0.75	1.0	1.5
Pallet Fork	48"		

* SAE J1995



RTV520

Mighty Capability. Agile Package.

- › Powerful Kubota Liquid-Cooled Efi Engine. The 2-cylinder engine is powerful with quiet and reliable muscle for most jobs. Kubota-built, the durable engine is liquid-cooled to ensure consistent performance throughout the day. Electronic Fuel Injection (EFI) makes starting the engine in cold weather easier and provides instant power with greater throttle control
- › Capable Towing Capacity. The reliable engine delivers capable towing capacity made simple with a standard trailer hitch for greater versatility, and an ability to attach trailers or pull-behind equipment. For those who refuse to compromise, the mighty RTV520 can tackle even the toughest jobs with its 1,168 lbs. towing capacity*
- › Comfortable Seat Design. The stylish matte black and contoured seats have been redesigned to provide better comfort during long rides
- › Narrow Stance. The RTV520's compact dimensions let you maneuver into and out of tight spaces with ease
- › Tight-Turning Radius. With a tight-turning diameter of just 21.7 ft., the RTV520 can work in narrow sites where bigger utility vehicles can't go
- › Metal Cargo Bed. The RTV520 features a metal cargo bed which hold up to loading, unloading and hauling material better than plastic beds - especially if the material is hard or pointed
- › Radiator With Screen. The radiator features a screen to maximize protection of the radiator. A window provides superior accessibility for cleaning and maintenance

* Manufacturer estimate (see owner's manual for details)

RTV520

RTV520

	GENERAL PURPOSE	DELUXE
Engine Type (Kubota)	2-cylinder, gasoline, water-cooled, EFI	
Horsepower (net)**	17.4	
Transmission	Variable Hydro Transmission (VHT Plus)	
Brakes (front/rear)	Dry disc brake	
Fuel Capacity (gal)	5.1	
Towing Capacity (lbs.)*	1,168	
Cargo Bed Capacity (lbs.)	935	
Weight (lbs.)	1,378	1,393
Length (in.)	105.1	111.2* including front guard
Overall Height (in.)	74"	
Width (in.)	54.7"	
Ground Clearance (front/rear axle in.)	8.9" / 6.7"	
Color	Orange and Camouflage***	Orange

ADDITIONAL IMPLEMENTS AND ACCESSORIES

Alloy Wheels	Optional	Standard
Steel Front Guard		Standard
Speedometer		Optional
Cab Systems		Optional
Canopy and Windshield		Optional
3,500 lb. Winch		Optional

* Manufacturer estimate (see owner's manual for details); ** SAE J1995; *** Realtree® Hardwoods HD Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.



UTILITY VEHICLES




SIDEKICK®
Shown with optional accessories

The gas-powered, large chassis Sidekick is where durability meets speed.

- › The Sidekick® is built upon the robust, heavy-duty platform to provide proven durability and performance
- › Electronic Fuel Injection (EFI) and a powerful 54 HP** gasoline, water-cooled engine provide plenty of torque, astonishingly quick acceleration, and high transport speed (up to 40 mph)
- › Idle Speed Control (ISC) ensures stable power
- › The Continuously Variable Transmission with centrifugal clutch (CVT-Plus) provides fast acceleration, smooth operation, and controlled braking with engine-assisted deceleration
- › The cogged belt on the CVT-Plus is kept tight for minimal slippage and excellent durability, fully shielded to help keep out dust and water, and cooled with a large fan for even greater longevity
- › Kubota Sidekick's® standard 45A Electronic Power Steering (EPS) delivers light steering at low speeds and firm control at high speeds. Designed for stability and precision, EPS adapts to heavy cabin loads, cargo, or snow blade attachments—ensuring confident handling and protection against over-steering at any speed. Even when fully loaded, the Sidekick won't bottom out—front and rear adjustable independent suspension delivers a smooth ride with plenty of clearance
- › The aggressive style is offered in five distinct colors, including the special edition Stone Gray Model, which comes with alloy wheels, spray-on bed liner, and a visually distinct design and graphics to signify being “ready for anything”

** SAE J1995

UTILITY VEHICLES



SIDEKICK

All photos shown with optional accessories.

	General Purpose	Worksite	Special Edition
Engine Type (Kubota)	2-cylinder, 4-cycle, Gas, DOHC		
Horsepower (gross)**	54		
Transmission	CVT PLUS (CVT with centrifugal clutch)		
Power Steering	Speed sensitive Electric Power Steering		
Brakes (front/rear)	4-wheel hydraulic disc brake		
Fuel Capacity (gal)	8.64		
Towing Capacity (lbs.)*	Flat: 2,000 / Slope: 1,550		
Weight (lbs.)	1,761		
Overall Height	79.5"		
Ground Clearance (rear axle)	9.9"		
Width	63.2"		
Body Color	Orange	Desert Sand, Black, Orange, and Camouflage***	Stone Gray
ADDITIONAL ACCESSORY OPTIONS			
Alloy Wheels	Optional		Standard
Hydraulic Bed Lift	Optional electric hydraulic power lift		
Steel Front Guard	Optional	Standard	
Spray-On Bed Liner	N/A	Optional	Standard

* Manufacturer estimate (see owner's manual for details); ** SAE J1995; *** Realtree® AP Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Visit KubotaUSA.com for a full listing of accessories and attachments.





Whether you're hauling half a ton of cargo on the job site or feeding livestock out in the pastures, the smooth-riding, hard-charging RTV-X gets it done.

- › VHT-X (Variable Hydraulic Transmission): Kubota's VHT-X provides exceptional performance on various terrains with smooth and powerful acceleration. Low-speed driving is made exceptional through smooth throttle control, great traction, and maneuverability with or without loads
- › Dynamic Brakes: One of the major benefits of the VHT-X is the dynamic braking, which slows the vehicle down when you remove your foot from the throttle. It also provides drivers a sense of confidence as they travel down slopes. The ability to utilize one pedal operation creates a great experience for both novice and experienced drivers alike by providing a heightened sense of security
- › Towing Capacity: Standard two-inch hitch receivers are located at the front and back. The back receiver lets you tow up to 1,300 lbs.* of gear. (*See owner's manual for detail.)
- › ProKonvert™ Cargo Bed Optional: When you have a job to get done, being able to easily load and unload the cargo bed is critical. The innovative bed design allows you to open from either side or the rear—especially useful for easily loading items in the back of the bed

RTV-X

Grade	Basic	Standard	Premium
Engine Type (Kubota)	3-cylinders, 4-cycle, diesel, OHV		
Horsepower (gross)**	23.3		
Transmission	Variable Hydraulic Transmission (VHT-X)		
Power Steering	Hydrostatic power steering		
Brakes (front/rear)	Wet disc brake		
Fuel Capacity (gal)	7.9		
Weight (lbs.)	2,050	2,072	2,099
Overall Height	79.5"		
Ground Clearance	10.4" - 10.5"		
Width	63.2"		
Cargo Capacity (lbs.)	1,102		
Towing Capacity (lbs.)*	1,300		
Body Color	Orange	Orange and Camouflage***	Orange, Camouflage, and Desert Sand

ADDITIONAL ACCESSORY OPTIONS

Alloy Wheels	Basic does not offer alloy wheels, only steel wheels. Only the standard and premium lines.	(Orange, Camo) Available (Desert Sand) Standard
Hydraulic Bed Lift	Optional	Standard
Standard Front Guard	Basic	Premium
Spray-On Bed Liner	N/A	(Orange) Available, (Camo) Standard

* Manufacturer estimate (see owner's manual for details); ** SAE J1995; *** Realtree® AP Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Visit KubotaUSA.com for a full listing of accessories and attachments.





Experience luxurious driving comfort with the factory-installed, climate-controlled cab.

- > RTV-X CAB features a premium grand cab that is built around a unibody chassis frame. The quiet, rattle-free environment and standard, factory installed A/C, heat, and defrost ensure that you'll ride in comfort year round
- > The RTV-X CAB boasts 23.3-horsepower** Kubota diesel engine for demanding jobs that require plenty of power
- > 1,300 lbs. towing capacity* with standard front and rear two-inch hitch receivers at the front and back
- > Up to 15.2 cubic feet of cargo — heavy-duty steel cargo box can carry up to a half-ton (1,102 lbs.) of tools, firewood, gear, supplies, and whatever you need to haul from here to there and back again
- > Front PTO attachment options take your RTV-X CAB to a higher level of versatility and performance
- > LED Headlights: For the jobs that begin well before the sun rises and continue on long after the sun sets, the LED headlights not only look cool, but also illuminate the way so you can stay focused on the job at hand
- > Front and rear independent suspension ensures an exceptional ride, and extra duty IRS (Independent Rear Suspension) sets a standard for durability
- > ProKonvert™ Cargo Bed Optional: When you have a job to get done, being able to easily load and unload the cargo bed is critical. The innovative bed design allows you to open from either side or the rear—especially useful for easily loading items in the back of the bed
- > Flatbed Conversion: Customers can easily convert the cargo bed into a flatbed without the use of any tools. Loading bulky or awkwardly shaped materials or equipment has never been easier—capability, reimagined
- > VHT-X (Variable Hydraulic Transmission): Kubota's VHT-X provides exceptional performance on various terrains with smooth and powerful acceleration. Low-speed driving is made exceptional through smooth throttle control, great traction, and maneuverability with or without loads

* Manufacturer estimate (see owner's manual for details); ** SAE J1995

RTV-X CAB

Trim	Standard	Premium
Engine Type (Kubota)	3-cylinder, diesel	
Horsepower (gross)**	23.3	
Transmission	Variable Hydraulic Transmission (VHT-X)	
Power Steering	Hydrostatic power	
Brakes (front/rear)	Wet disc brake	
Fuel Capacity (gal)	7.9	
Weight (lbs.)	2,414	
Overall Height	82.3"	
Ground Clearance	10.4"	
Width	65.4"	
Cargo Capacity (lbs.)	1,102	
Towing Capacity (lbs.*)	1,300	
Body Color	Orange	Desert Sand and Camouflage***

ADDITIONAL ACCESSORY OPTIONS

	Standard	Premium
Wheels	Steel	Alloy
Hand Throttle	Standard	
Hydraulic Bed Lift	Standard	
Standard Front Guard	Standard	Premium
Spray-On Bed Liner	Optional	Standard

* Manufacturer estimate (see owner's manual for details); ** SAE J1995; *** Realtree® AP Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Visit KubotaUSA.com for a full listing of accessories and attachments.





From spacious cargo capacity to generous seating for up to four adults, this utility workhorse gives you the best possible performance and comfort across a wide range of jobs.

- › K-vertible Cargo Transformation System: two- and four-passenger configuration in less than a minute
- › Powerful Kubota 3-cylinder, liquid-cooled, 4-cycle, 23.3-horsepower** diesel engine
- › Exclusive Kubota 2-range VHT-X (Variable Hydraulic Transmission)
- › Top speed of 25 mph and 1,300 lbs. towing capacity*
- › Quick, responsive hydrostatic power steering
- › LED Headlights - For the jobs that begin well before the sun rises and continue on long after the sun sets, the LED headlights not only look cool, but also illuminate the way so you can stay focused on the job at hand
- › ROPS meets both OSHA and SAE requirements for both front and back row seats, meeting many job site requirements and allows you to load and dump the cargo bed in both the one-row and two-row configuration
- › Radiator and air-intake located high and up front, where the air is cleaner and cooler. This helps radiator performance and simplifies maintenance
- › Wet disc brakes for smooth, consistent braking and excellent durability
- › Independent front and rear suspensions, and a long wheelbase deliver a smooth, stable ride
- › Standard 19.1 cu. ft./9.9 cu. ft. (two-seat/four-seat configurations) cargo bed with hydraulic lift capability in either configuration (up to 1,102 lbs. capacity)

* Manufacturer estimate (see owner's manual for details); ** SAE J1995

RTV-X CREW

Trim	Basic	Standard	Premium
Engine Type (Kubota)	3-cylinder, 4-cycle, diesel, OHV		
Horsepower (gross)**	23.3		
Transmission	Variable Hydraulic Transmission (VHT-X)		
Power Steering	Hydrostatic power		
Brakes (front/rear)	Wet disc brake		
Fuel Capacity (gal)	7.9		
Weight (lbs.)	2,370		
Overall Height	79.7"		
Ground Clearance (rear axle)	9.4"		
Width	63.2"		
Cargo Capacity (lbs.)	1,102 (long) / 661 (short)		
Towing Capacity (lbs.)*	1,300		
Body Color	Orange	Orange and Camouflage	Orange, Desert Sand, and Camouflage***

ADDITIONAL ACCESSORY OPTIONS

Wheels	Steel		Alloy
Hand Throttle	Standard		
Hydraulic Bed Lift	Standard		
Standard Front Guard	Basic	Standard	Premium
Spray-On Bed Liner	Optional		Standard

* Manufacturer estimate (see owner's manual for details); ** SAE J1995; *** Realtree® AP Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.

Visit KubotaUSA.com for a full listing of accessories and attachments.





The RTV-X LONG BED delivers the capability, power, and performance needed to get the job done right.

- › Full Steel Frame/CV Joint Guards: The high-rigidity steel frame helps isolate the occupants from noise and vibration. The structural strength of this frame can hold up to many different tasks and seasons, to help you power your productivity
- › VHT-X (Variable Hydraulic Transmission): Kubota's revised VHT-X delivers smooth, powerful acceleration and outstanding performance across varied terrains. Exceptional low-speed control, traction, and maneuverability—whether loaded or unloaded—make it ideal for demanding tasks
- › Wet Disc Brakes: The RTV-X LONG BED uses multi-disc wet brakes which provide excellent brake life. You'll also feel more secure, especially when traveling down long inclines, knowing that dynamic braking is helping to provide additional braking power and greater driving control
- › Standard Prokonvert™ Cargo Bed: It's not enough to get you there and back—you need to get your stuff there and back as well. This heavy-duty 6 ft. steel cargo bed can do that for you, carrying more than a half-ton (1212 lbs.) of tools, materials, gear, supplies—so you can be ready for what the day may bring
- › Standard Hydraulic Dump Bed: Unload sand, gravel, turf, and more with ease using the RTV-X LONG BED'S impressive 26.1 cu. ft. cargo capacity. The powerful hydraulic system makes dumping cargo quick and easy, so you can move on to what is next

RTV-X LONG BED

RTV-X LONG BED

Body Color	Kubota Orange	**** Hunters Camo*** Edition
Engine Type (Kubota)	3-cylinders, 4-cycle, diesel, OHV	
Horsepower (gross)**	23.3	
Transmission	Variable Hydraulic Transmission (VHT-X)	
Power Steering	Hydrostatic power steering	
Brakes (front/rear)	Wet disc brake	
Fuel Capacity (gal)	7.9	
Weight (lbs.)	2,340	
Overall Height	80"	
Ground Clearance	11.3" / 9.4"	
Width	63"	
Cargo Capacity (lbs.)	1,212	
Towing Capacity (lbs.)*	1,300	

ADDITIONAL ACCESSORY OPTIONS

Wheels	Steel	
Hydraulic Bed Lift	Standard	
Front Guard	Standard	Premium
Spray-On Bed Liner	Standard	

* Manufacturer estimate (see owner's manual for details); ** SAE J1995; *** Realtree® AP Camouflage is a registered trademark of Jordan Outdoor Enterprises, Ltd.; ****Factory accessorized Hunter Edition

Visit KubotaUSA.com for a full listing of accessories and attachments.



MOWERS



T Series

T2290KW | T2290KWT

	T2290KW	T2290KWT
Engine Type	OHV, air-cooled, gasoline, 2-cylinder, V-twin	
Engine Model	Kawasaki FR651V	
Horsepower (gross)*	21.5	
Transmission	Hydrostatic	
Fuel Capacity (gal)	3.6	
Speed (mph) (forward)	0-5.7	0-6.7
Overall Length	75.2"	
Deck Size	42"	48"
Overall Width (w/o mower)	39.8"	
Weight (lbs.)	622	661

ADDITIONAL IMPLEMENTS AND ACCESSORIES

Armrest Kit	Standard	
Grass Catcher (blower not necessary)	GCK42-90T	GCK48-90T
Mulching Kit	T2832	T2838
Front Push Blade (48")	T2833	
Two-Stage Snowblower (46")	T2834	

*Gross horsepower certified by Kawasaki in accordance to SAE J1995

Easy to operate and fun to drive, the Kubota T Series is durable and packed with premium features to keep you mowing efficiently and comfortably.

- Equipped with a high performance 21.5-horsepower* Kawasaki Engine
- All models are equipped with hydrostatic transmissions (HST) for precise control
- High-back seat provides extra cushioning and support with dual armrests for comfort
- A thicker, higher-positioned steering wheel helps reduce fatigue while improving operator comfort
- Convenient 12V power outlet lets you charge your phone or power accessories, like an air compressor
- Short 14" turning radius allows easy maneuvering around difficult objects
- Mower height adjusts from 1" to 4" right from the operator's seat with simple dial-cam setting
- Upgraded fabricated mower deck, along with new tubular-frame structure, improves strength, rigidity, and durability
- Ductile cast iron front axle is strong and durable, handling all sorts of bumps & shocks
- Compatible with a full line of performance-matched, quick-attach front implements

MID-MOUNT MOWER SPECIFICATIONS

	RCK42P-90T	RCK48P-90T
Number of Blades	2	3
Cutting Width	42"	48"
Cutting Height	1-4"	
Height Adj. Increments	1/4"	
Lift System	Manual w/ gas assist	

*Gross horsepower certified by Kawasaki in accordance to SAE J1995



MOWERS



GR Series GR2020G | GR2120

With Kubota's revolutionary Glide Steer[®], all-wheel drive, plus tight turning, even difficult mowing conditions are now effortless.

- › Your choice of a 3-cylinder, 17-horsepower Kubota diesel engine or a 2-cylinder, 20-horsepower Kohler gasoline engine
- › Glide Steer[®] provides excellent turning maneuverability with front wheels that turn up to 70 degrees while helping to prevent turf damage
- › All-wheel drive (AWD) characteristics provide outstanding traction needed for mowing on rolling terrain
- › Versatile HST transmission is controlled by a single foot pedal for a smooth and comfortable ride
- › Shaft-driven mower, transmission, and PTO offer smooth, virtually trouble-free operations
- › Cruise control, full-flat operator platform, and a comfortable high-back, adjustable suspension seat increase operator comfort
- › 5" deep, 48", and 54" contoured design mower decks are able to produce professional results
- › Equipped with Kubota's Reverse Awareness System (KRA) for additional safety when mowing in reverse
- › Variety of implements available for year-round versatility, including a grass catcher, two-stage snowblower, front blade, and mulching kit

GR Series

	GR2020G	GR2120
Engine Type	Air-cooled, gasoline, 2-cylinder	Liquid-cooled, diesel, 3-cylinder
Engine Model	Kohler	Kubota
Horsepower (gross)	20.5*	17**
Transmission	Hydrostatic	
Steering System	Glide Steer®, hydrostatic power steering	
Deck Size	48"	48" / 54"
Overall Length	77.2"	
Overall Width (w/ mower)	61" (w/48")	66.9" (w/54")
Weight (lbs.) (w/ mower)	871 (w/48")	970 (w/54")

ADDITIONAL IMPLEMENTS AND ACCESSORIES

Front Blade	48"
Grass Catcher	3-bag, 10-bushel capacity
Mulching Kit	Optional
Snowblower	2-stage 46"
Rear Weight Bracket	Optional
Suitcase Weights	Optional

MOWER SPECIFICATIONS

	RCK48-GR	RCK54-GR
Number of Blades	3	
Cutting Width	48"	54"
Cutting Height	1–4"	
Height Adj. Increments	1/4"	
Lift System	Hydraulic	

* Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 or J2723 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions, and other factors. The gross engine horsepower information is for comparison purposes only.; ** SAE J1995





Z200 Series

Z232KW-42 | Z242KH-48 | Z242KW-48 | Z252KH-54 | Z252KW-54

The ultimate residential zero-turn mower—combining style, comfort, and performance.

- › K-Ride® comfort system provides enhanced comfort (features may vary)
- › Adjustable suspension seat standard on KW 48" and 54" models, optional on KH models
- › Folding ROPS standard on KW 48" & 54" models, optional on KH models
- › A 10-gauge steel, welded mower deck provides exceptional cutting performance for homeowners
- › Push button start allows for easy one-handed starting
- › Covered storage box keeps things out of the weather and safe
- › Convenient cup holders keep your drinks at hand
- › Wide-tread tires give you better traction and weight distribution to help protect your lawn
- › The K-Lift (mechanical one-push deck-lift pedal) makes adjusting the cutting height simple
- › Z232KW comes with a 42" deck to maneuver in and out of intricate spaces smoothly and with ease
- › Zero-turn steering for superior machine control and precision mowing
- › The Z200 Series is covered by the four-year, 300-hour Kubota Limited Warranty

Z200 Series

	Z232KW-42	Z242KH-48	Z252KH-54	Z242KW-48	Z252KW-54
Engine Type	Air-cooled, gasoline, V-Twin				
Engine Model	Kawasaki FR	Kohler 7000		Kawasaki FR	
Horsepower (gross)	21.5*	22**	25**	21.5*	24*
Displacement (cu. cm.)	726	725	747	726	
Transmission	Hydro-Gear™ Commercial ZT2200 Integrated Zero-Turn Transaxle	Hydro-Gear™ Commercial ZT3100 Integrated Zero-Turn Transaxle			
Fuel Tank Capacity (gal)	3.6	4.3			
Speed (mph) (forward/reverse)	0–6.5 / 0–4	0–8 / 0–4			
Overall Length	74.4"	79.0"			
Overall Width (w/ mower chute down)	55.1"	61.1"	67.3"	61.1"	67.3"
Overall Height	66.7"	73.0" Fixed ROPS		68.4" Foldable ROPS	
Wheel Base	48.7"	47.0"			
Weight (lbs.)	643	811	827	844	860

MOWER SPECIFICATIONS

Mower Deck Type	Pro performance fabricated deck				
Mower Lift System	Mechanical				
Mower Height, Increment	1.5–4.25", 1/4"	1.5–4.5", 1/4"			
Mower Deck Width	42"	48"	54"	48"	54"
Blade Tip Speed (fpm)(max):	17,700	18,100			

IMPLEMENTS AND ACCESSORIES

Grass Catcher	Optional				
Mulching Kit	Optional				
Seat Suspension Kit	N/A	Optional		Standard	
LED Working Light Kit	Optional				
Canopy Sunshade & Deck Lift Assist Kit	N/A	Optional			
Arm Rest Kit	Optional	N/A			
Hitch Kit	Optional	N/A			

* Gross horsepower certified by Kawasaki in accordance to SAE J1995

** Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 or J2723 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions, and other factors. The gross engine horsepower information is for comparison purposes only.

MOWERS



Z400 Series

Z412KW | Z422KW | Z422KWT | Z411KW | Z421KW | Z421KWT
Z452KWI | Z452KWT

Designed for the user who seeks professional performance and durability as well as comfort and convenience.

Z412 and Z422 Features

- › Premium 22" high back 3" suspension seat offers thick cushion with high back and a 4" adjustable seat slide that improves comfort and reduces fatigue
- › Suspension seat is standard on the Z412, Z422, and Z452 models
- › Powered by Kawasaki FS and FT Series Engines, the Z400 provides the torque you need to power through tall, tough grass conditions
- › The Z400 is driven by the dependable and durable Hydro-Gear ZT-3600 transmission
- › Maximum forward travel speed of 10 mph contributes to quickly completing the job at hand
- › A generous fuel tank capacity of 6.8 US gallons (25.7 L)
- › Smooth patented weighted control lever operation with dampers that have three adjustment positions (weighted control levers not available on Z411 or Z421 models)
- › All deck sizes have 13" x 6.5"-6" front pneumatic tires
- › The Z411, Z412, Z421, and Z422 have the pneumatic front caster tires. Z452 has semi-pneumatic front caster tires.
- › Simple operation of the mower lift pedal efficiently raises the mower deck
- › The operation panel is conveniently and integrally located on the right fender and features a simple, easy-to-operate design
- › Convenient 12V power outlet lets you charge your phone or power accessories, like an air compressor
- › The seat features a thick cushion construction, and slides a full 4" travel forward and back, allowing even prolonged operations to be undertaken in maximum comfort (Z411 and Z421)

Z400 Series

	Z412KW-48 Z411KW-48	Z422KW-54 Z421KW-54	Z422KWT-60 Z421KWT-60	Z452KWi-54	Z452KWTi-60
Engine Type	Air-cooled, gasoline, 2-cylinder			EFI - Air cooled V-twin vertical crank shaft gasoline engine	
Engine Model	Kawasaki FS 651V	Kawasaki FS 730V		Kawasaki FT 730V EFI	
Horsepower (gross)*	22	24		26	
Displacement (cu. cm.)	726				
Transmission	Hydro-Gear ZT-3600				
Front Tire	13" x 6.5"-6" (Z412 and Z422) 13" x 5" x 6" 13" x 6.5" - 6"			13" x 6.5"-6" Semi-pneumatic	
Fuel Capacity (gal)	6.8				
Speed (mph) (forward/reverse)	0-10 / 0-5				
Overall Length	48.7"		54.2"		80.9"
Overall Width (w/ mower chute)	61.1"	67.3"	73.6"	67.3"	73.6"
Overall Height (w/ROPS upright)	69.8"				
Weight (lbs.) (w/ mower)	856	870	904	954	988

MOWER SPECIFICATIONS

	RCK48P-400Z	RCK54P-400Z	RCK60P-400Z	RCK54P-400Z	RCK60P-400Z
Mower Deck Type	Kubota Side Discharge				
Mower Lift System	Mechanical / Foot pedal				
Deck Depth	5"				
Cutting Height	1.5-5", 1/4"				
Cutting Width	48"	54"	60"	54"	60"
Blade Tip Speed (fpm) (max.)	18,880	18,700	18,300	18,700	18,300

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	Z400 Series
Grass Catcher Kit	Optional
Mulching Kit	Optional
Chute Block Kit	Optional
Suspension Seat Kit	Optional
LED Work Light Kit	Optional
Operator Controlled Discharge Chute	Optional
Canopy Sunshade	Optional
Maintenance Lift Kit	Optional

* Gross horsepower certified by Kawasaki in accordance to SAE J1995

MOWERS



Z700 Series

Z781KWiTW | Z751KWi | Z781KWi | Z781KWiTi | Z724XKW |
Z726XKW | Z723KH | Z724KH | Z725KH

Designed for the commercial landscape professional, the Z700 Series offers performance, productivity, comfort, and the durability that Kubota is known for.

Z781KWiTW

- › Airless (Tweel) tires now standard on 54" and 60" models

Z700EFI Model Features

- › Kawasaki FX EFI engines feature a fully integrated electronic governor (E-GOV) and a cutting edge ECU control unit. They deliver outstanding performance without power loss
- › EFI dial throttle control delivers effortless engine control
- › LCD engine meter provides all the information you need to keep your Z700 EFI unit running at optimum efficiency
- › Equipped with 24" low profile tires
- › 12V power outlet can charge or power many devices

All Model Features

- › Premium adjustable suspension seat offers a thick cushion with a 21.2" high back 3" suspension seat with 6" adjustable seat slide that allows you to find the ideal seating position for maximum comfort
- › Deck step indicator provides easier access
- › Water and dust proof safety switches help to reduce failures
- › 6"-deep mower deck and anti-scalp rollers help to provide fast, clean and superior grass-cutting performance
- › With an 11.2 mph maximum speed, it's Kubota's fastest zero-turn mower
- › Dual Parker® transmissions with an integrated pump and motor designed for increased efficiency and simplified maintenance

Z700 Series

	Z781KWi-54 Z781KWTi-60 Z781KWITW						
	Z751KWi-48	Z724XKW-3-48	Z724XKW-3-54	Z726XKW-3-60	Z723KH-3-48	Z724KH-3-54	Z725KH-3-60
Engine Type	Air-cooled, gasoline, V-Twin						
Engine Model	Kawaski FX 730V EFI	Kawaski FX 850V EFI	Kawasaki FX FX 730V	Kawasaki FX FX 801V	KOHLER Command Pro® CV682	KOHLER Command Pro® CV732	KOHLER Command Pro® CV742
Horsepower (gross)	25.5*	29.5*	23.5*	25.5*	22.5**	23.5**	25**
Displacement (cu. cm.)	726	852	726	852	694	694	747
Transmission	Parker® HTG14						
Fuel Capacity (gal)	11.6						
Speed (mph) (forward/reverse)	0–11.2 / 0–5.6						
Overall Length	83.9"						
Overall Width (w/ mower)	61.3"	67.3" / 73.8"	61.3" / 67.3"	73.8"	61.3"	67.3"	73.8"
Overall Height (w/ ROPS upright)	70.1"						
Wheel Base	50.9"						
Weight (lbs.) (w/ mower)	1,215	1,254 / 1,285	1,207 / 1,223	1,276	1,212	1,226	1,257

MOWER DECK SPECIFICATIONS

Mower Deck Type	Commercial fabricated deck						
Mower Deck Width, Lift System	48" Mechanical	54" / 60" Mechanical	48" / 54" Mechanical	60" Mechanical	48" Mechanical	54" Mechanical	60" Mechanical
Cutting Height	1–5"						
Height Adj. Increments	1/4"						
Mower Deck Depth	6"						
Blade Tip Speed (fpm) (max):	18,600	18,400 / 18,600			18,600		

IMPLEMENTS AND ACCESSORIES

Premium Suspension Seat	Standard
Grass Catcher	Optional – 10 bushels (48" / 54"), 11 bushels (60")
Mulching Kit	Optional
Operator-Controlled Discharge Chute	Optional
Towing Hitch	Optional
LED Working Light Kit	Optional
Maintenance Lift Kit	Optional
Canopy Sunshade	Optional
Karu Mulching Blade	Optional, 60" only

* Gross horsepower certified by Kawasaki in accordance to SAE J1995

** SAE J1940

Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 or J2723 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions, and other factors. The gross engine horsepower information is for comparison purposes only.

MOWERS



SZ Series

SZ19NC-36-2 | SZ22NC48-2 | S26NC-52-2 | SZ26NC-61-2

The Kubota SZ Series commercial stand-on is the answer to get more done, faster and more efficiently, in even the tightest spaces while delivering superior comfort and durability.

All Models

- › Commercial-grade Kawasaki FX & FT EFI gas engines equipped with Hydro-Gear integrated transmissions
- › Adjustable front baffle on cutting decks (on 48", 52" and 61")
- › Smooth three-position adjustable dampened controls
- › Tool-less adjustable front reference bar
- › Large operator platform (48", 52" and 61" models)
- › Tool-less tracking adjustment
- › Ergonomic cushion pad
- › No-flat front castors

SZ Series

	SZ19NC-36-2	SZ22NC-48-2	SZ26NC-52-2	SZ26NC-61-2
Engine Type	Kawasaki FX600V	Kawasaki FX691V	Kawasaki FT730V-EFI	
Horsepower (gross)*	19 HP	22 HP	26 HP	
Transmission	Hydro-Gear ZT3100	Hydro-Gear ZT3600		
Speed	9 MPH	11 MPH		
Fuel Capacity (gal)	5.1	6.5		
Deck Type	Fabricated Floating			
Deck (ga)	7 ga top and side skirts w/ 3 ga reinforcement	10 ga top and 7 ga side skirts w/ 3 ga reinforcement w/ adjustable front baffle (on -2 models)		
Deck Spindle & Bearings	1" Shaft w/ Maintenance-Free Seal Bearings			
Deck Size	36"	48"	52"	61"
BladeTip Speed (fpm)	17,950	17,773	18,585	18,850
Cutting Height	Adjustable 1.5" - 4.5"			
Front Tires (Flat-Free)	11" x 6"-5"	13" x 6.5"-6"		
Rear Tire	20" x 8"-10"	23" x 8.5"-12"	23" x 10.5"-12"	
Weight (lbs.)	800	961	991	1,028
Length	64"			
Height	45"	45.75"		

ATTACHMENTS

Mulch Kit	SMK36	SMK48-2	SMK52-2	SMK61-2
Discharge Plate	SBP36	SBP48-2	SBP52-2	SBP61-2
Weight Kit	SWK36	SWK48		
Striping Kit	N/A	SSK48	SSK52-61	
Deck Lift Assist	N/A	SZLA01		
Accelerator Grass Catcher 1	SGC61			

* Gross horsepower certified by Kawasaki in accordance to SAE J1995



MOWERS



W Series

WHF14NC-36-2 | WHF15NC-48-2 | WHF19NC-52-2

Kubota's durable Commercial Walk-Behind Mowers offer options for all commercial mowing, small and large.

WHF14NC-36-2 / WHF15NC-48-2 / WHF19NC-52-2

- › The ergonomic handle design and intuitive control layout keep operators mowing confidently and comfortably
- › All models use commercially proven Kawasaki FS-series engines to deliver reliable performance and superior durability
- › The durable Hydro-Gear ZT-2800 hydrostatic transaxles deliver smooth and simple operation with ground speeds of up to 6.5 mph
- › The large rear wheels provide ample ground clearance to enable smooth, easy maneuverability on all types of terrain
- › The dependable cutting decks are equipped with steel-fabricated spindle assemblies and welded baffle systems
- › Easy-to-maintain features include a tool-less oil drain, a handy external oil filter location, and easy battery access

Walk-Behind Mowers

	WHF14NC-36-2	WHF15NC-48-2	WHF19NC-52-2
Engine Type	Kawasaki FS481V	Kawasaki FS541V	Kawasaki FS600V
Horsepower (gross)*	14.5	15	18.5
Fuel Capacity (gal)	5		
Speed (mph)	6.5		
Transmission	Hydro-Gear ZT-2800 transmissions		
Mower Deck Type	Fabricated Floating Deck with Wear Band		
Deck (ga)	10 ga deck with 10 ga top and 7 ga skirts		
Blade Tip Speed (fpm)	18,127	16,832	18,645
Cutting Height	1.5" - 4.5"		
Starter	Electric		
Hand Controls	Ergonomic Bull Horn		
Deck Spindle	Maintenance-free with 1" shaft		
Spindle Bearings	Precision-ground double-sealed bearings		
Deck Drive	Warner Mag Stop 105 ft.-lb. electric clutch		
Front Tires	11" x 6"-4" No-Flat		
Rear Tires	20" x 6.5" - 8"	20" x 8" - 8"	
Brakes	(-2) Hydrostatic Dynamic Braking		
Weight (lbs.)	774	789	832
Length	78"		
Height	40.3"	43"	

* Gross horsepower certified by Kawasaki in accordance to SAE J1995



ZG200 Series ZG222 | ZG227

The professional-quality performance, exceptional comfort, and outstanding reliability of the ZG200 Series make it the ultimate mowing machine for both professionals and homeowners.

- › Powered by durable 21.1- and 26-horsepower air-cooled Kubota gasoline engines*
- › Zero-turn steering for superior navigation
- › Reliable, ultra-smooth hydrostatic transmission offers superior durability and performance
- › Heavy-duty Pro Commercial Mower Deck features a unique baffle system that discharges grass clippings for professional-looking results
- › Optional mulching system provides a beautiful finish even in thick grass
- › Foot-operated hydraulic deck-lift system for easy adjustment
- › Spacious platform, comfortable and supportive seating, and an easy-to-reach cup holder for operator comfort
- › Operator-friendly instrument panel puts everything within close reach
- › Convenient mower, HST, and engine access for hassle-free maintenance
- › Foldable ROPS standard

ZG200 Series

	ZG222-48	ZG227-54/60
Engine Type	Kubota air-cooled, gasoline, 2-cylinder	
Engine Model	Kubota KGZ770-M3	Kubota KGZ770-M2
Horsepower (gross)*	21.1	26
Displacement (cu. cm.)	768	
Transmission	2-HST w/gear reduction	
Fuel Capacity (gal)	7.1	
Speed (mph) (forward/reverse)	0-9 / 0-5	
Overall Length	82.5"	82.5" / 83.7"
Overall Width (w/mower chute)	61"	67.3" / 75.2"
Overall Height (w/ROPS upright)	69.9"	
Overall Height (w/ROPS folded)	52.8"	
Weight (lbs.) (w/mower)	1,168	1,190 / 1,235

MOWER SPECIFICATIONS

	ZG222-48	ZG227-54/60
Mower Deck Type	Welded, side discharge	Welded, side discharge
Mower Deck Width / Lift System	48" / Hydraulic	54 or 60" / Hydraulic
Cutting Height	1-5"	
Height Adj. Increments	1/4"	
Mower Deck Depth	6" (48)	6"

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	ZG200 Series
Canopy Sunshade	Optional
Grass Catcher	Optional
Mulching Kit	Optional
Working Light Kit	Optional

* SAE J1940

MOWERS



ZG300 Series ZG327P | ZG327RP

Built for power, durability, and performance, the ZG300 Series features deep mower decks for exceptional cutting performance.

- › ZG300 mowers are available with durable Kubota air-cooled gasoline engines with 26 gross horsepower*
- › Durable HST transmission optimizes performance to achieve maximum results
- › Pro Commercial Deck is a superior deep mower deck that helps to ensure excellent cutting performance
- › Anti-scalp swivel rollers can rotate a full 360 degrees helping to prevent unsightly turf damage
- › Large-capacity dual fuel tanks on ZG300 Series models
- › Foot-controlled hydraulic deck lift and PTO wet disc clutch
- › Unique maintenance lift system allows easy mower access (optional on ZG300 models)
- › Tie-down for securing onto flatbed truck or trailer for convenient transportation
- › “Flat-free” front caster tires are standard with ZG300 and enable mowing operation without worrisome flat-tire downtime

ZG300 Series
**ZG327P-60
ZG327RP-60R**

Engine Type	Kubota air-cooled, gasoline, 2-cylinder
Engine Model	Kubota KGZ770
Horsepower (gross)*	26
Displacement (cu. cm.)	768
Transmission	2-HST w/gear reduction
Fuel Capacity (gal)	12.7
Speeds (mph) (forward/reverse)	0–10.6 / 0–5.3
Overall Length	87.8"
Overall Width (w/ mower)	75.2"
Overall Height	75.4"
Weight (lbs.)	1,565

MOWER SPECIFICATIONS

Mower Deck Type	Welded, side, or rear discharge
Mower Deck Width / Lift System	60" / Hydraulic
Mower Height / Increment	1–5" / 1/4"
Mower Deck Depth	6.5"

ADDITIONAL IMPLEMENTS AND ACCESSORIES
ZG300 Series

Canopy Sunshade	Optional
Front Utility Blade	Optional
Grass Catcher**	Optional
Mulching Kit	Optional
Spark Arrester	Optional
Striping Kit	Optional
Working Light Kit	Optional
Karu Mulching Blade	Optional

* SAE J1940



Product may be shown with optional equipment

ZD1000 Series ZD1011 | ZD1021

Top to bottom, front to back, and inside and out, Kubota's ZD Series of zero-turn mowers is engineered for quality. Versatile and reliable, the ZD1000 compact mower can handle jobs big and small.

- › The Kubota ProDeck with ACS (Aerodynamic Cutting System®) delivers professional-looking results, meaning you can get the job done right the first time
- › The Clean-cut blades are designed to optimize overall load balance and provides a longer service life in comparison to traditional blades
- › Discharge chute is designed with a strong but flexible material to promote smooth, uniform discharge of grass clippings
- › Improved fuel efficiency — up to 22% better
- › Low center of gravity provides stability on slopes and uneven ground
- › A two-pedal hydraulic deck-lift system lets you easily raise and lower the deck with your foot

ZD1000 Series

	ZD1011-48 / ZD1011-54	ZD1021-60
Engine Type	Kubota liquid-cooled, diesel, 3-cylinder	
Engine Model	Kubota D782-E4-ZD-3	Kubota D902-E4-ZD-2
Horsepower (gross)*	19.3	21.6
Displacement (cu. cm.)	778	898
Transmission	2-HST w/gear reduction	
Fuel Capacity (gal)	6.0	
Speed (mph) (forward/reverse)	0-9 / 0-5	
Overall Length	87.8"	88.8"
Overall Width (w/ mower chute)	61.6" / 67.3"	73.8"
Overall Height (w/ ROPS upright)	74.4"	
Front Tires	13 x 5.0-6 smooth pneumatic	13 x 6.5-6 smooth pneumatic
Rear Tires	24 x 9.5-14 low-profile tire	24 x 12.0-14 low-profile tire
Brakes	Wet multi-discs, foot applied, released	
Weight (lbs.) (w/ mower)	1,296 / 1,323	1,389

MOWER DECK SPECIFICATIONS

	RCK48P-1000Z	RCK54P-1000Z	RCK60P-1000Z
Mower Deck Type	Kubota ProDeck with ACS		
Mower Lift System	Hydraulic		
Deck Depth	6"		
Cutting Height	1-5"		
Cutting Width	48"	54"	60"
Blade Tip Speed (fpm) (max.)	17100		18200

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	ZD1011-48 / ZD1011-54	ZD1021-60
"Catch-All" 2-Bag Style Grass Catcher	Optional	
Hitch Kit	Optional	
Operator-Controlled Discharge Chute	Optional	
Work Light Kit	Optional	
Canopy Sunshade	Optional	

* SAE J1995



ZD1200 Series

ZD1211 | ZD1211R | ZD1211L | ZD1211RL

With a bigger engine and wider mower deck, the ZD1200 gets the job done with speed and efficiency. These premium mowers incorporate the best of Kubota's advanced technology in every detail, and help to ensure both superior mowing performance and supreme operator comfort.

- › The large LCD meter shows all the key indicators you need to maximize cutting performance and operability
- › For faster operation and better ergonomics, the mower deck controls are on the right side within easy reach of your hand, letting you quickly and easily adjust the cutting height
- › Equipped with low profile tires
- › HST levers designed with operator comfort in mind, meaning more leg room and more adjustability for smoother operation
- › A more comfortable, fully padded, and reclining bucket seat means less operator fatigue and greater productivity—with dual adjustable armrests, higher backrest, and lumbar support
- › The optional “Catch-All” hopper-style grass catcher holds 11.4 bushels of clippings and can be emptied while the operator remains seated

ZD1200 Series

	ZD1211-60 / ZD1211R-60R		ZD1211L-72 / ZD1211RL-72R	
Engine Type	Kubota liquid-cooled, diesel, 3-cylinder			
Engine Model	Kubota D1105-E4-ZD-2			
Horsepower (gross)*	23.3			
Displacement (cu. cm.)	1,123			
Transmission	2-HST w/gear reduction			
Fuel Capacity (gal)	13.0			
Speed (mph) (forward/reverse)	0–10.6 / 0–5.3			
Overall Length	89"		93.7"	
Overall Width (w/ mower chute)	73.8" / 63"		85.8" / 75.2"	
Overall Height (w/ROPS upright)	78.7"			
Front Tires	15 x 6.5-8 smooth semi-pneumatic			
Rear Tires	26 x 12.0-16 low-profile tire			
Brakes	Wet multi-discs, foot applied, released			
Weight (lbs.) (w/ mower)	1,687 / 1,720		1,764 / 1,786	

MOWER DECK SPECIFICATIONS

	RCK60P-1200Z	RCK60RP-1200Z	RCK72P-1200Z	RCK72RP-1200Z
Mower Deck Type	Kubota ProDeck with ACS	Kubota ProDeck	Kubota ProDeck with ACS	Kubota ProDeck
Mower Lift System	Hydraulic			
Deck Depth	6.0"	5.5"	6.0"	5.5"
Cutting Height	1–5"			
Cutting Width	60"		72"	
Blade Tip Speed (fpm) (max.)	18,050	16,900	18,050	18,000

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	ZD1211-60 / ZD1211-60R	ZD1211L-72 / ZD1211RL-72R
“Catch-All” Hopper-Style Grass Catcher	Optional	
“Catch-All” 2-Bag Style Grass Catcher	Optional	
Karu Mulching Blade	Optional, 60" and 72"	
Hitch Kit	Optional	
Operator-Controlled Discharge Chute	Optional	
Work Light Kit	Optional	
Canopy Sunshade	Optional	

* SAE J1995



ZD1611 Series

ZD1611RL | ZD1611LF | ZD1611RFL

The ZD1611 stakes its place at the top of the line of Kubota's diesel zero-turn mowers with the electronically controlled Kubota diesel engine and the Aerodynamic Cutting System® to significantly enhance cutting performance.

- › The flexible discharge chute helps to ensure superior scattering of clippings
- › Wider, thicker, and more durable blades contribute to optimized air flow
- › Compared to the previous model, the ZD1611 features an enlarged flywheel that is responsible for an increase from 29.1 hp (21.7 kW) to 30.8 hp (23 kW)
- › The hydraulic transmission, a unique Kubota feature, ideally complements the V1505 Kubota diesel engine
- › The 3.5" (88.9 mm) wide LCD Panel provides machine diagnostics and machine performance indicators
- › Two-pedal type hydraulic lift system enables the operator to easily raise the mower deck when an obstacle is encountered
- › Operators do not need to remove hands from levers to engage the parking brake through use of the conveniently located parking brake pedal
- › The simple and easy-to-use two-pin type maintenance lift allows for quick access to the mower deck making maintenance a breeze

ZD1611 Series

	ZD1611RL-60R	ZD1611LF-72 / ZD1611RLF-72R
Engine Type	Diesel, liquid-cooled (4 cyl.) with DPF	
Engine Model	Kubota V1505-CR-TE5-ZD1	
Horsepower (gross)*	30.8	
Displacement (cu. cm.)	1,498	
Transmission	2-HST w/gear reduction	
Fuel Capacity (gal)	13.0	
Speed (mph) (forward/reverse)	0–10.6 / 0–5.3	
Overall Length	105.7"	
Overall Width (w/ mower chute)	63"	85.8" / 75.2"
Overall Height (w/ROPS upright)	78.7"	
Front Tires	15 x 6.5-8 smooth semi-pneumatic	
Rear Tires	26 x 12.0-16 low-profile tire	
Brakes	Wet multi-discs, foot applied, released	
Weight (lbs.) (w/ mower)	2,105	2,094 / 2,105

MOWER DECK SPECIFICATIONS

	RCK60RP-1500Z	RCK72P-1500Z	RCK72RP-1500Z
Mower Deck Type	Kubota ProDeck	Kubota ProDeck with ACS	Kubota ProDeck
Mower Lift System	Hydraulic		
Deck Depth	5.5"	6.0"	5.5"
Cutting Height	1–5", 1/4"		
Cutting Width	60"	72"	
Blade Tip Speed (fpm) (max.)	17,200	18,300	

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	ZD1611RL	ZD1611LF	ZD1611RFL
Mulch Kits	Optional		
Work Light Kit	Optional		
Canopy Sunshade	Optional		
Operator Controlled Discharge Chute (OCDC)	N/A	Optional	N/A
Karu Mulching Blade	Optional, 72"		

* SAE J1995

MOWERS



F Series F2510E | F2510 | F3710

The F Series sets the standard for professional front-mount mowers with cleaner emissions and greater power, precision, and efficiency.

- › Kubota diesel engines provide fast and efficient job performance with high-torque rise that allows you to power through tall or wet grass
- › The F3710 offers the highest-ever horsepower among all Kubota front-mount mowers
- › 6" deep, side-discharge deck design lets tall grass stand up so it can be cut more easily with a cleaner appearance
- › Large operator's platform and deluxe high-back seat with four separate adjustments and operator levers for maximum driving comfort and convenience
- › Hydrostatic power steering reduces operator effort and makes it easier to mow around trees and other obstacles

F Series

	F2510E	F2510	F3710
Engine Type	Kubota liquid-cooled, diesel, 3-cylinder		Kubota liquid-cooled, diesel, 4-cylinder
Engine Model	Kubota D1105-E4-FM-4U		Kubota V1505-CR-TE5-FM2
Horsepower (gross)*	23.3		36.9
Displacement (cu. cm.)	1,123		1,498
Transmission	Hydrostatic, 2-range		
Fuel Capacity (gal)	16.1		
Speed (mph) (forward/reverse)	0–12 / 0–6.2	0–12.4 / 0–6.8	
Overall Length	96.5"		99.6"
Overall Width	48.8"	53.9"	
Overall Height	77.8"	78.1"	
Min. Ground Clearance	7.0"	7.3"	
Weight (lbs.)	1,684	1,715	1,872

MOWER SPECIFICATIONS

	RCK60P-F39	RCK72P-F39	RCK60R-F36	RCK72R-F36
Mower Deck Type	Welded, side discharge		Welded, rear discharge	
Cutting Width	60"	72"	60"	72"
Cutting Height	1–5", 1/4"			
Mower Deck Depth	6"		5.5"	

ADDITIONAL IMPLEMENTS AND ACCESSORIES

	F2510E	F2510	F3710
Hard Cab Enclosure		Optional	
Cab Heater		Optional	
Grass Catcher 12-Bushel, Low-Dump Style		Optional	
Debris Blower		Optional	
60" Front Blade		Optional	
60" Rotary Sweeper		Optional	
Snow Blower		Optional	
Mulching Kit		Optional	

* SAE J1995

KUBOTA SERVICES

KUBOTA SERVICES: SUPPORT THAT WORKS AS HARD AS YOU DO

At Kubota, we know that owning equipment is just the beginning—keeping it running at peak performance is what truly matters. That's why we offer a full suite of services designed to protect your investment, simplify ownership, and keep you productive for years to come.

KUBOTA GENUINE PARTS KEEP YOUR EQUIPMENT RUNNING LIKE NEW

Kubota Genuine Parts are engineered to original factory specifications, helping to ensure your equipment performs at its best. Available through our nationwide Dealer network and supported by four strategically located US warehouses, you'll have quick access to the parts and manuals you need.

BENEFITS:

- › Guaranteed fit and performance
- › Maintains reliability and longevity
- › Backed by Kubota's trusted Dealer network

KUBOTA ORANGE PROTECTION PROGRAM® EXTEND YOUR PEACE OF MIND

Protect your investment beyond the limited warranty with Kubota's Orange Protection Program. Extend coverage by one or two years and enjoy uninterrupted protection.¹

BENEFITS:

- › Comprehensive coverage with no deductibles
- › Extends Basic and Powertrain warranties
- › Fully transferable for added resale value
- › Financing available when purchased with your equipment

KUBOTA CREDIT CORPORATION, USA FLEXIBLE FINANCING FOR EVERY NEED

Since 1982, Kubota Credit Corporation, U.S.A. has helped customers bring their plans to life with competitive rates and flexible payment options. From seasonal terms to property damage insurance, we make financing simple and tailored to your needs.

BENEFITS:

- › Competitive interest rates
- › Flexible down payments and terms
- › Insurance options for added protection



**KUBOTA-BACKED, NO DEDUCTIBLE
EXTENDED WARRANTY SOLUTION**

¹Orange Protection Program is available in Florida for commercial customers only.



KTAC INSURANCE AGENCY

COMPREHENSIVE COVERAGE YOU CAN COUNT ON

KTAC Insurance offers “all-risk” protection² designed specifically for Kubota equipment. From theft and fire to flood and collision, your investment is covered—on your property and in transit.

BENEFITS:

- > Broad coverage for unexpected events
- > Low \$250 deductible
- > Convenient payment options
- > Transportation reimbursement

KUBOTA LEASING

AFFORDABLE ACCESS TO THE EQUIPMENT YOU NEED

Kubota Leasing makes it easier for commercial customers to get the equipment they need without heavy upfront costs. With flexible terms and fast approvals, leasing is a smart way to keep your business moving forward. Program Highlights Include:

BENEFITS:

- > Lower monthly payments
- > Quick, hassle-free application process
- > Flexible structures to fit your budget

MY KUBOTA APP

YOUR EQUIPMENT, YOUR WAY—RIGHT AT YOUR FINGERTIPS

Take control of your Kubota experience with the My Kubota App, designed to make ownership easier and more productive. Manage your equipment, keep track of maintenance, and find compatible attachments—all in one place. Everything you need is just a tap away.


Download the myKubota App today and unlock a smarter way to manage your equipment.

Download the myKubota app

and see all compatible attachments for your unit

Find Kubota performance matched implements & attachments to go along with your unit directly in the myKubota app.

Scan to download now

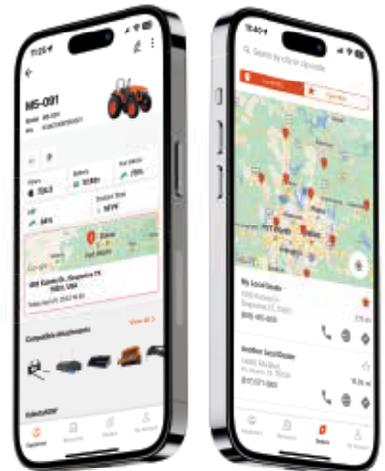

²See policy details.



Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety, and product information, consult your local Kubota Dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global website. Kubota does not provide parts, warranty, or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.



KUBOTA TRACTOR CORPORATION

1000 Kubota Drive
Grapevine, TX 76051
KubotaUSA.com



This brochure is for descriptive purposes only. Please contact your local Kubota Dealer for warranty and safety information. See Dealer for details.

KUB-092025-1 Rev 1-26 Full Product Line Brochure | Copyright © 2026 Kubota Tractor Corporation. All rights reserved.