




KUBOTA HAY IMPLEMENTS KUBOTA BROADENS THE RANGE

Introducing new additions to the Kubota Family



KUBOTA DM3087

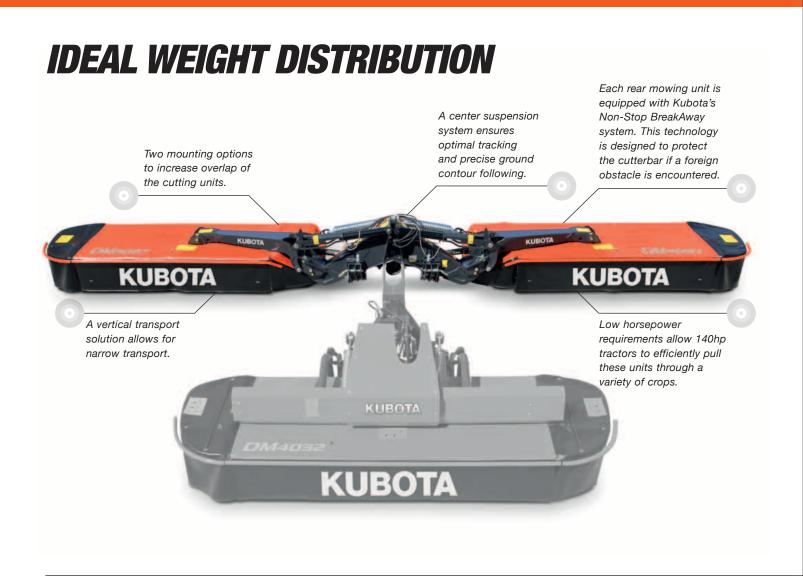


Kubota DM3087

With only 140hp, Kubota's DM3087 can provide 28'7" of cutting productivity. This cutting solution allows farmers to effectively mow extensive areas with a relatively small tractor.

Weighing only 3000lbs, this unit proves to be the ideal ratio between low weight, to large working width. The center suspended mowing units combined with Kubota's cutterbar technology and their three - bladed discs offer unmatched mowing performance.

Kubota Model	DM 3087
Working Width (ft)	28'7"
Weight approx. (lbs)	3000
Hitch (CAT)	2/3
Min. PTO hp req. (hp/kW)	140/100
Number of discs/ blades	16/48

KUBOTA DM4032

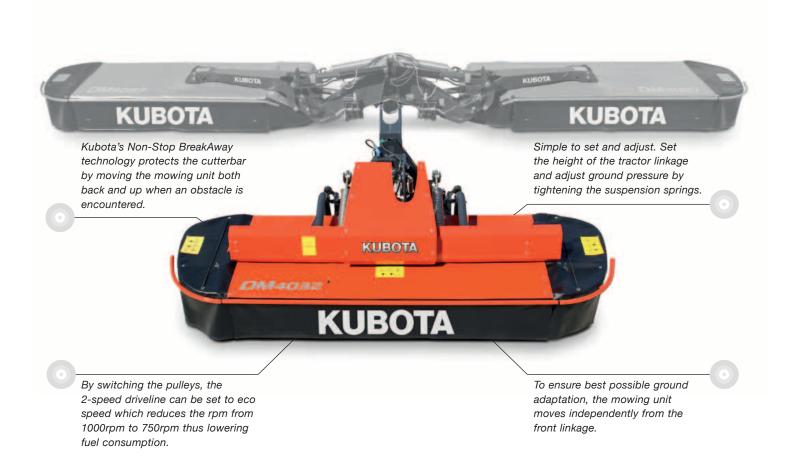

OUTSTANDING GROUND FOLLOWING ABILITY

Kubota DM4032


Kubota's DM4032 features a user friendly interface while still providing a tough low weight solution. The DM4032 distinguishes itself through its excellent cutting performance and its unique ability to adapt to a variety of terrain.

With eight counter rotating discs, cut quality is uncompromised. Running the DM4032 in combination with Kubota's DM5040, producers can effectively cut 23'7" of material with very low horsepower demands.

Kubota Model	DM 4032
Working Width (ft)	10'6"
Weight approx. (lbs)	1566
Hitch (CAT)	2
Min. PTO hp req. (hp/kW)	40/29
Number of discs/ blades	8/24

KUBOTA DMC8028R

INCREASED DURABILITY

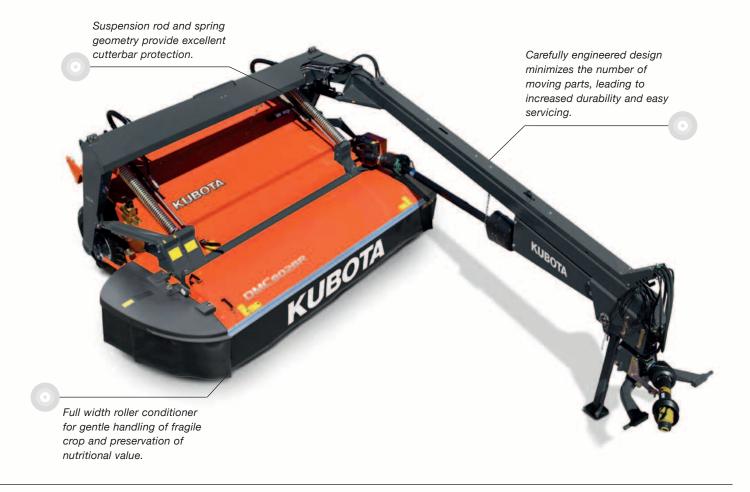

Kubota DMC8028R

Kubota's DMC8028R was carefully designed to allow both the cutterbar and conditioning unit to float separately from the main chassis, providing an unsurpassed ability to follow a variety of terrain. This unit features full width roller conditioning and Kubota's 3-bladed cutterbar technology.



Kubota Model	DMC 8028R
Working Width (ft)	9'2"
Weight approx. (lbs)	3870
Hitch (CAT)	2
Min. PTO hp req. (hp/kW)	70/50
Number of discs/ blades	16/18

KUBOTA RA2072

COST-EFFECTIVE TWO-ROTOR RAKE



Kubota RA2072

The RA2072 is Kubota's smallest double rotor, center delivery rake. This rake is ideal for small professional operations that need added flexibility. With raking widths ranging between 20'4" - 23'7" it has the ability to work comfortably in tight fields and produce consistent windrows day in and day out.

Kubota's RA2072 has a sturdy carrier frame which features rear steered wheels, a TerraLink Quattro flexibility system and a unique hydraulically controlled working width adjustment.

Kubota Model	RA 2072
Working Width (ft)	20'4"-23'7"
Weight approx. (lbs)	3616
Hitch (CAT)	2
Min. PTO hp req. (hp/kW)	50/35
Number of rotors	2
Number of arms per rotor	11

The company reserves the right to change the above specifications without notice. This brochure is for descriptive purposes only. Some of the items pictured in this brochure are optional and not standard equipment. Please consult your local Kubota dealer for warranty, safety or product information. Kubota strongly recommends of a seatbelt and ROPS (rollover protective structure) in almost all applications. ©2015 Kubota Corporation



KUBOTA TRACTOR CORPORATION Kubota Tractor Corporation, 3401 Del Amo Boulevard, Torrance CA 90503

Visit our web site at: www.kubota.com

