



2015-16


RTV-X1100C PTO K-CONNECT



VERSATILITY & PERFORMANCE »

» Power Module & PTO K-Connect


Fast & reliable PTO connection system

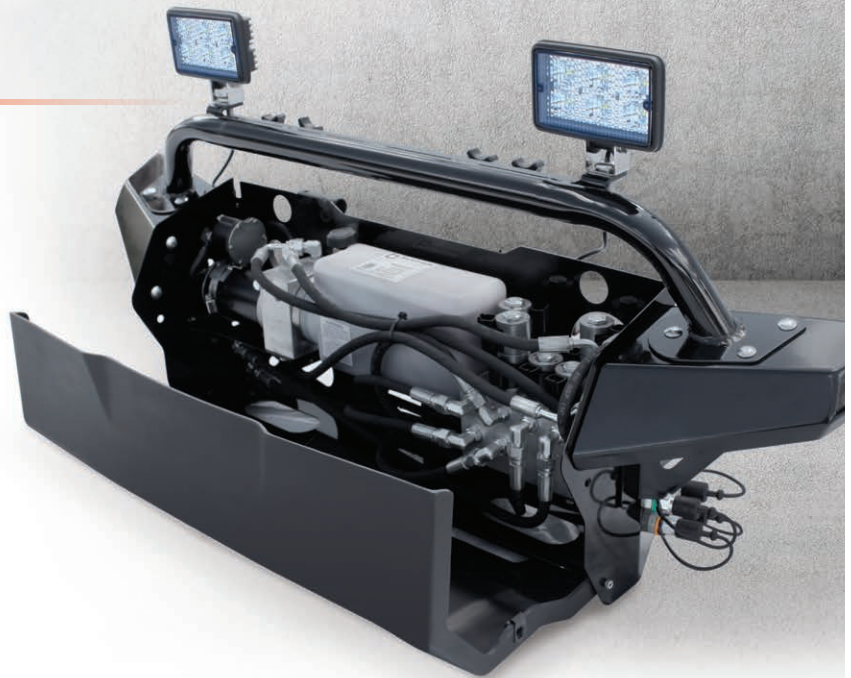


High quality LED lights for increased luminescence



4 Point hitch shown with K-Connect installed

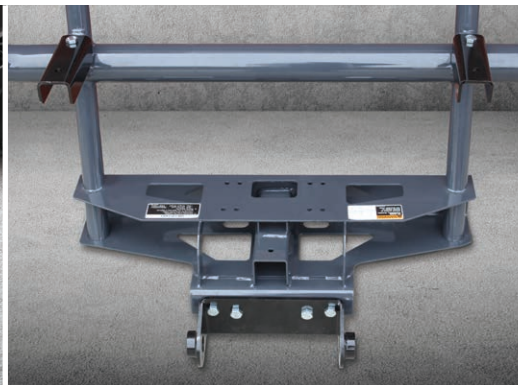

Optional grill guard adaptor kit

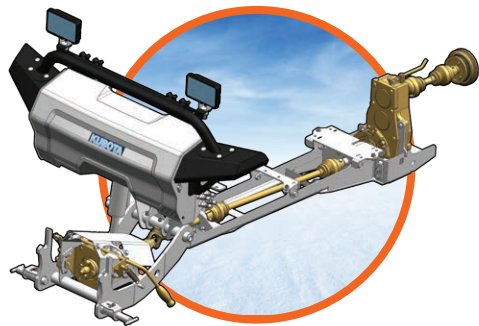

- Implements connect in seconds without tools! Simply flip the PTO lever and start working.
- The complete system can be removed in less than 1 hour.

Features & Benefits

- » The complete system can easily be removed for seasonal storage
- » The PTO is gear box driven, for durability and precision
- » Accessible greaseable fittings for preventative maintenance
- » Skid plate protection

» Snowblower 66"


*Professional
grade
snowblowing*



Standard hydraulic chute rotation and deflection



Throws snow farther than the competition

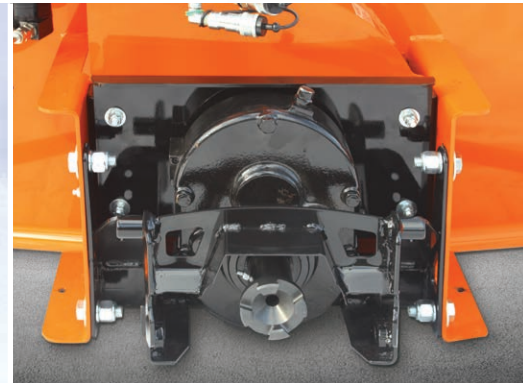

Gear box reduction for less maintenance and quieter operation



Four Blade Fan for Superior Performance

Features & Benefits

- » 66" wide two stage commercial snowblower
- » Throws snow with less dispersion and more precision
- » Hydraulic chute rotation and deflection standard
- » Adjustable/replaceable skid shoes
- » Optional hard plastic skid shoes and cutting edge
- » Replaceable/reversible cutting edge
- » Shear bolt protected for auger and fan
- » Gear box reduction for less maintenance and more durability
- » Drift cutters standard

>> Sweeper 66"



*Easy & fast
broom adjustment*



**Self balancing
adjustment handle**



**PTO powered -
turns at more than 240 rpm**



**Floating wheel placement
avoids obstructions**




**Oscillation Angle
up to 8.5°**

Hydraulic Angling up to 25°

Features & Benefits

- » 66" wide PTO driven sweeper
- » Loaded with 34 (24" diameter) wafer brushes that can easily be replaced within 20 minutes
- » Turns at more than 240 RPM
- » Standard polyethylene brushes
- » Standard floating wheels
- » Optional dust suppression system
- » Optional 50/50 Poly - Steel brushes
- » Designed for even wear of the bristles and to follow ground contour

>> Control Handle & PTO Switch

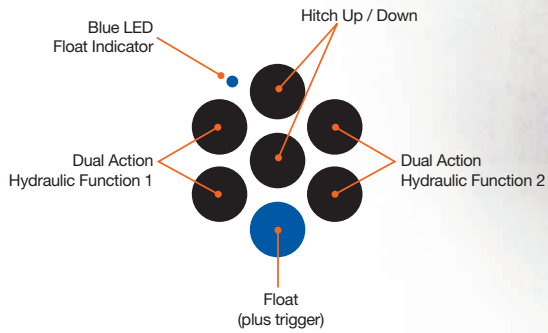

Simple intuitive control for all implements



Easy to reach trigger to activate float function



Ergonomic design for right or left hand comfort



Control handle mounting system included



PTO Switch

Features & Benefits

Control Handle

- » Symmetrical design for left or right hand operation
- » Blue LED indicator that confirms the floating action of the hitch for immediate use. This LED is activated when both the trigger and the blue colored button are pressed simultaneously
- » Smooth floating action by design

PTO Switch

- » Ergonomically located and easily reachable
- » Double action intuitive control (similar to that found on tractors)
- » Operator presence cutoff switch is standard

>> V-Plow 78"

Designed for heavy duty application




Compression spring trip edge and adjustable relief valve for safety



Each wing is re-enforced with three vertical ribs, one diagonal rib and a C channel



Double acting cylinder on each wing for true back dragging action

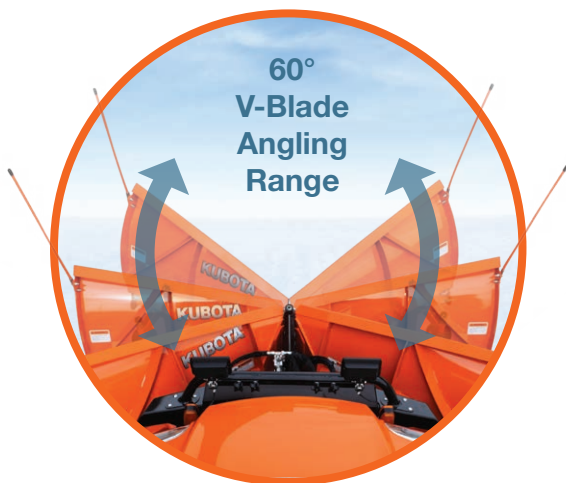


Features & Benefits


- » 78" wide to accommodate the width of the RTV-X1100C when fully angled at 30°
- » Replaceable high carbon steel cutting edge with hard plastic option
- » New curved design eliminates the need for a deflector
- » Independent trip edge protection by compression springs
- » Moldboard relief valve protection
- » Can operate in float or down pressure for better performance
- » Highly intuitive control handle
- » Position markers are standard

» Straight Blade 78"

Superior performance you can rely on

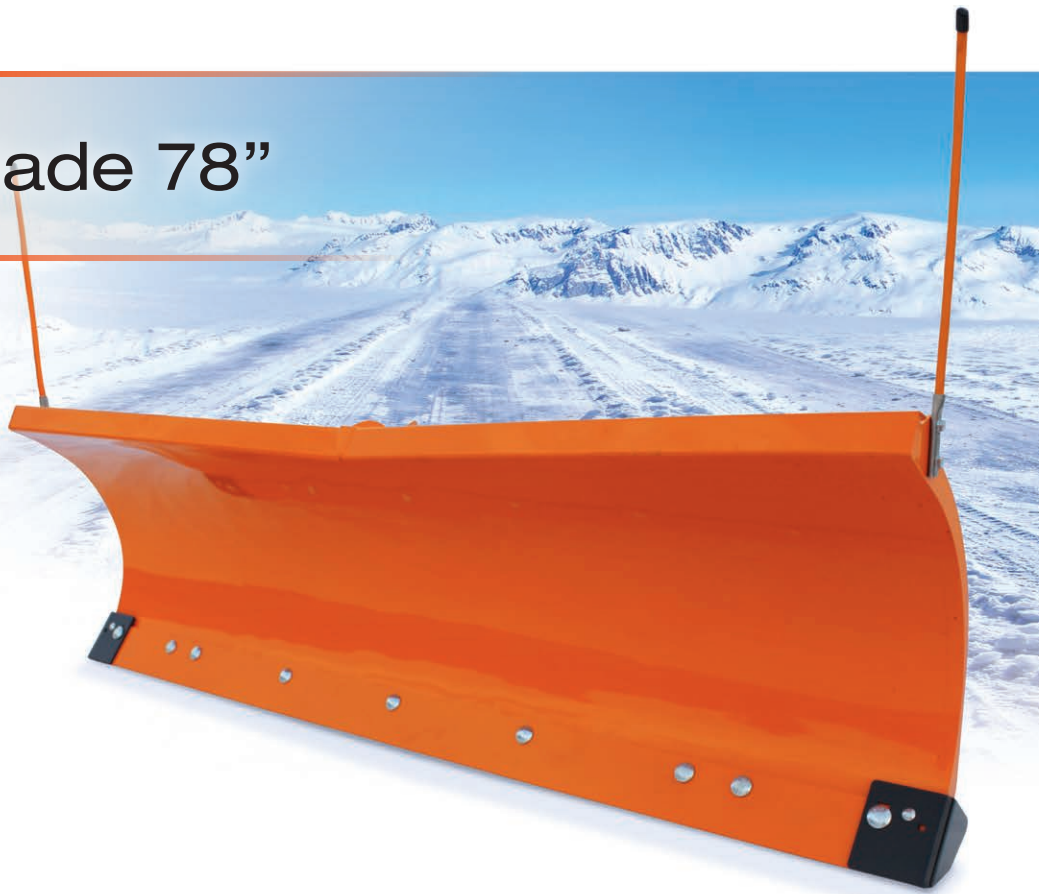

New curvature to better roll the snow

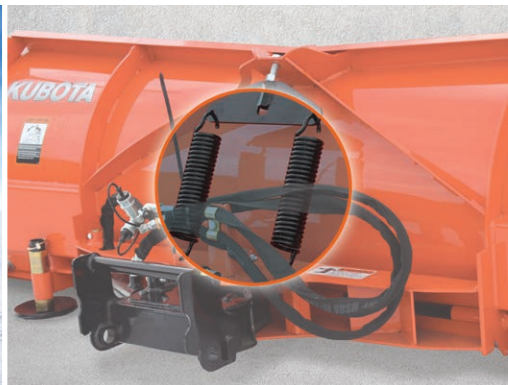

Trip spring protection for moldboard



Optional skid shoes and curb guards



Superior Rolling Action

Features & Benefits

- » 78" wide to accommodate the width of the RTV-X1100C when fully angled at 30°
- » Replaceable high carbon steel cutting edge with hard plastic or rubber options
- » New curved design eliminates the need for a deflector
- » Full moldboard trip protection by two springs
- » Can operate in float or down pressure for better performance
- » Position markers are standard

>> Specifications



V5296



V5266



V5295A



V5294A

Description	Snowblower	Broom	V-Blade	Straight Blade
Nominal width	66"	66"	78"	78"
Hitch model	4 pt hitch	4 pt hitch	4 pt hitch	4 pt hitch
Overall length - inches (mm)	30 (762)	47 1/2 (1207)	42 1/2 (1080)	45 1/2 (1158)
Overall width - inches (mm)	67 (1702)	76 3/4 (1950)	78 (1981)	78 (1981)
Overall height - inches (mm)	45 (1143)	25 (635)	27 3/4 (705)	24 (610)
Lift height - inches (mm)	18 1/2 (470)	7 3/8 (187)	12 3/4 (324)	13 1/2 (343)
Maximum angling		25°	30°	30°
Angle control		hydraulic	hydraulic	hydraulic
Width at maximum angling - inches (mm)		59 3/8 (1509)	67 1/2 (1714)	68 (1727)
Cutting height with drift cutter - inches (mm)	30 (762)			
Auger diameter - inches (mm)	12.75 (324)			
Auger speed @ pto rpm	155 @ 3000			
Flighting pitch - inches (mm)	15 (381)			
Impeller diameter - inches (mm)	16 (407)			
Number of blades on impeller	4			
Impeller speed @ pto rpm	772 @ 3000			
Chute rotation	220°			
Maximum oscillation		8.5°		
Brush type		wafer		
Brush diameter		24"		
Brush speed @ engine rpm		243 @ 3000		
PTO shaft type		06 series		
Drive type		50 H chain		
Cutting edge height - inches (mm)			5 (127)	4 (102)
Cutting edge thickness - inches (mm)			1/4 (6.35)	1/4 (6.35)
Approx. Shipping weight - lbs (kg)	340 (155)	480 (218)	380 (172)	310 (141)

* Installation of PTO reduces ground clearance.

Kubota Tractor Corporation reserves the right to change stated specifications without notice. This brochure is for descriptive purposes only and does not provide any express or implied warranty of any nature. Some items in this brochure are optional and not standard equipment. Please consult your local Kubota dealer for warranty, safety or product information. For off-highway use only. Kubota strongly recommends use of a fastened seat-belt and ROPS (rollover protective structure) in almost all applications.

