



For Earth, For Life
Kubota

T

KUBOTA LAWN TRACTOR
T1880/T2080/T2380

T-Series lawn tractors provide the power and versatility you need as well as our revolutionary new 3-in-1 mower deck.



Learning to drive one will take minutes. Getting off of one might take a bit longer.

From the very first time you turn the key and start up a T-Series lawn tractor, you'll be in love. The first thing you'll feel is the comfortable seat and you'll notice the roominess of the full-flat operator platform. Next, you'll appreciate the T-Series' increased horsepower, especially when taking on big jobs or when mowing

long grass. But most of all, you'll be pleasantly surprised at just how easy the T-Series is to use, from its smooth hydrostatic transmission to its revolutionary new 3-in-1 mower deck. With the T-Series, what were once chores will soon turn into recreation.



● Introducing Kubota's new 3-in-1 mower deck.

∞ INFINITY DECK

Named for its distinctive counter-rotating figure-eight grass flow, the Infinity Deck's most notable benefit is its ability to quickly and easily change cutting modes without having to change blades. The proprietary secret behind this 3-in-1 deck is its sturdy steel "gate" that slides to cover the discharge area, thus speedily turning the deck into a mulching deck.




1 Side-Discharge Mode

In this mode, the deck discharges grass evenly and efficiently through the side of the deck, utilizing two counter-rotating blades. The flow created by these blades is where the Infinity Deck gets its name.



Gate open with discharge chute

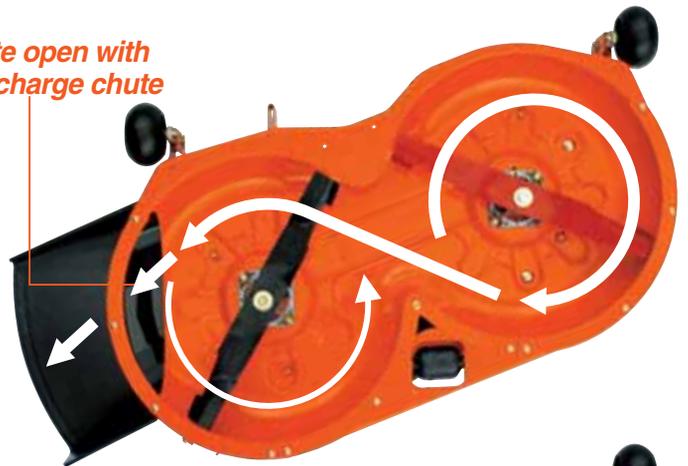

2 Mulching Mode

To change from side-discharge to mulching mode, simply slide the steel gate, conveniently located on the outside of the deck, to the front of the discharge area. This feature, along with the deck's rounded shoulders, keeps grass under the deck, ensuring the perfect mulch. No special blades, tools or optional attachments are needed.



Gate closed




3 Grass Catching Mode

Using the optional grass catcher is now easier than ever. Due to the powerful flow of the Infinity Deck, a blower is no longer needed—the deck does all the work. With this design, attaching the grass catcher's boot is made simple.



Gate open with grass catcher attached

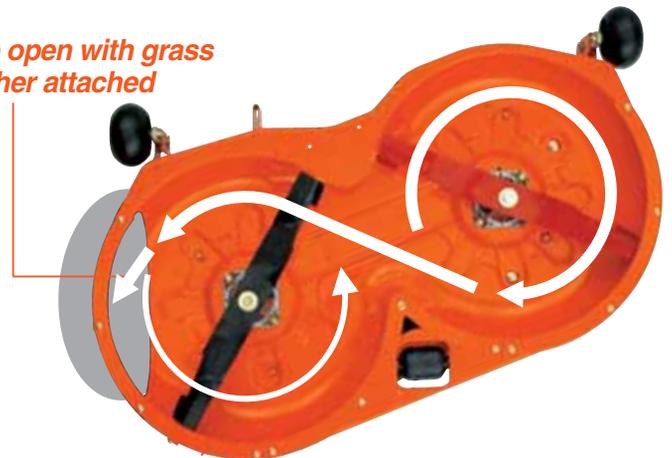

Smooth Operation

Hydrostatic Transmission

The hydrostatic transmission (HST) makes operating the T-Series easier and more precise than ever. A single pedal controls both speed and direction changes quickly, without shifting or clutching. This system keeps your hands free for precise steering at all times, which is especially important when maneuvering around trees and shrubs or working in confined spaces.



Cutting Height Adjustment

Adjusting the mower deck's cutting height is easy with Kubota's simple dial-type design. Just reach underneath the operator's seat and turn the control dial.



Easy Mower-lift Lever

Press the button on top of this conveniently located lever to release the mower deck and raise or lower as needed.



KRA: Kubota Reverse Awareness System

The T-Series is equipped with the Kubota Reverse Awareness System to prevent you from mowing in reverse. You may choose to override the system by depressing an override switch. A flashing light reminds you that reverse mowing has been selected.

Cruise Control (Standard on T2080 and T2380)

The T-Series' cruise control feature allows you to maintain a constant mowing speed once you have reached the desired speed. You can also reach the desired speed by pulling the cruise control knob.



One-step Parking Brake

With this feature, parking is accomplished quickly, easily and safely. To activate the parking brake, simply depress the parking brake pedal firmly with your foot.



Larger Rear Tires

Taller and wider rear tires (22x11-10) are now standard on the new T-Series. They ensure better traction and stability.

New Higher Power Gasoline Engines

The T2080 and T2380 models are equipped with powerful 20HP and 22HP V-Twin gasoline engines. The T1880 offers a single-cylinder, 18HP gasoline engine.

● Comfort

Full-flat Operator Platform

The T-Series features a full-flat operator's platform. This design offers ample floor space and legroom, and makes getting on and off the tractor easy.

High-back Seat (Standard on T2080 and T2380)

Our deluxe high-back seat adjusts easily to accommodate different size operators.



Cushion Ride Suspension (Standard on T2080 and T2380)

Kubota's exclusive "Cushion Ride" suspension system, located in the tractor fender, is yet another industry first. This feature's design utilizes two spring-loaded shocks connected to the operator's platform, providing you with a smooth, comfortable ride.



● Quick-Attach Grass Catcher

The new T-Series seven-bushel grass catcher enables efficient grass catching without the use of a blower thanks to Kubota's innovative Infinity Deck. Built to complement the grass catcher, the Infinity Deck's blades are the sole power source for the catcher. The deck's design makes attaching the boot to the deck easy. The catcher bin is also easy to attach due to the newly developed V-frame.



Quick-attach V-Frame



Specifications

Model		T1880A2	T2080A2	T2380A2
Engine:	Model	GH541V	GH737V	GH738V
	Type	OHV air-cooled gasoline engine		
	Number of cylinders	1	2	
	Total displacement	36.4 cu.in. (597 cc)	44.2 cu.in. (725 cc)	
	Gross horse power	18 HP (13.4 kW)*	20 HP (14.9 kW)*	22 HP (16.4 kW)*
	Starter	Electric start		
Battery voltage:		12V		
Fuel tank capacity:		3.6 gal. (13.5 l)		
Dimensions:	Overall length	77.0 in. (1955 mm)		
	Overall width [with mower]	54.8 in. (1392 mm)	60.8 in. (1544 mm)	
		[42" mower]	[48" mower]	
Overall height	42.9 in. (1090 mm)	44.3 in. (1125 mm)		
Wheelbase:		50.8 in. (1290 mm)	54.3 in. (1380 mm)	
Wheel tread:	Front	30.8 in. (783 mm)		
	Rear	28.6 in. (727 mm)		
Tire size:	Front	15 x 6.00-6		
	Rear	22 x 11.00-10		
Weight:		639 lbs. (290 kg) (with 42" mower deck)	650 lbs. (295 kg) (with 42" mower deck)	661 lbs. (300 kg) (with 48" mower deck)
Turning radius (at outer front tire):		6.3 ft. (1.9 m)		
Steering system:		Pinion & Sector gear type		
Number of speeds:		Infinite to maximum		
Traveling speed:	Forward	0 to 5.6 mph (0 to 9.0 km/h)		
Transmission:		Hydrostatic transmission		
PTO clutch:		Belt tension		
Brake:		Disc		
KRA system:		Standard		
Optional accessories:		Hour meter, Tractor cover, etc.		

Mower Specifications

Model	RCK42-LT20-2	RCK48-LT23-2
Mounting method	Suspended parallel linkage	
Adjustment of cutting height	Dial gauge	
Cutting width	42 in. (1067 mm)	48 in. (1219 mm)
Cutting height	1.0-4.0 in. (25 to 102 mm)	
Number of blades	2	
Discharge	Right side	

*Power (hp) specifications for individual gasoline engine models are rated pursuant to Society of Automotive Engineers (SAE) J1940 based on gross output testing performed in accordance with SAE J1995 without the air cleaner and muffler. Gross engine hp will be higher than actual engine power which is affected by accessories, application, engine speed, ambient operating conditions and other factors. The gross engine horsepower information is for comparison purposes only. The company reserves the right to change the above specifications without notice. Please contact your local Kubota dealer for warranty information.

©2014 Kubota Corporation



KUBOTA TRACTOR CORPORATION

Kubota Tractor Corporation, 3401 Del Amo Boulevard, Torrance CA 90503
 Western Division: 1175 S. Guild Ave., Lodi, CA 95240 Tel (209) 334-9910
 Central Division: 14855 FAA Boulevard, Fort Worth, TX 76155 Tel (817) 571-0900
 Northern Division: 6300 at One Kubota Way, Groveport, OH 43125 Tel (614) 835-1100
 Southeast Division: 1025 Northbrook Parkway, Suwanee, GA 30024 Tel (770) 995-8855

Visit our web site at: www.kubota.com

Cat.No.2298-01-US Printed in Japan.D.REX.'14-MAR.