

IMPLEMENT LIMITATIONS

IMPORTANT:

The BX80 Series Kubota Tractor has been thoroughly tested for proper performance with implements sold or approved by Kubota. Do not use the following implements:


- Implements which are not sold or approved by Kubota
- Implements which exceed the maximum specifications listed in the following table
- Implements which are otherwise unfit for use with the Kubota tractor

These implements may result in malfunctions or failures of the tractor, damage to other property, and injury to the operator or others.

NOTE:

Any malfunctions or failures of the tractor resulting from use with improper implements are not covered by the warranty.

Model		BX1880, BX2380, and BX2680
Tread (max. width)	Front	36.6 in. (930 mm)
	Rear	32.2 in. (820 mm)
Lower link end max. lifting weight W0		1210 lbs. (550 kg)
Actual figures	Implement weight and/or size	As in [Implement weight list]
	Max. hitch load W2	550 lbs. (250 kg)
	Trailer loading weight W3 (Max. capacity)	1765 lbs. (800 kg)
	Total weight W4	2425 lbs. (1100 kg)

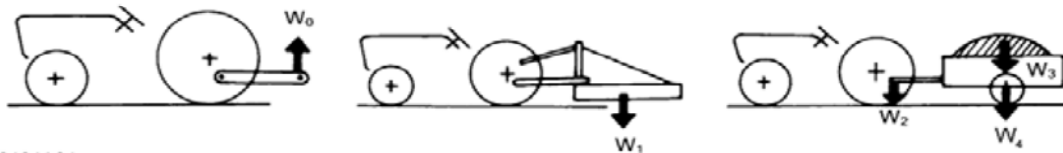

1BXMC00101A01

Lower link end max. lifting weight: W0

The max. allowable load which can be put on the lower link end

Implement weight: W1

The implement's weight which can be put on the lower link

Max. hitch load: W2

The max. loading weight for hitching

Trailer loading weight: W3

The max. loading weight for trailer (without trailer's weight)

Total weight: W4

The max. loading weight for trailer with trailer's weight)

NOTE

- Implement size may vary depending on soil operating conditions
- Strictly follow the instructions outlined in the operator's manual of the mounted or trailed machinery or trailer, and do not operate the combination tractor-machine or tractor-trailer unless all instructions have been followed.

- When you use the forestry application, there are following hazards:
 - Toppling trees, primarily in case a rear-mounted tree-grab crane is mounted at the rear of the tractor
 - Penetrating objects in the operator's enclosure, primarily in case a winch is mounted at the rear of the tractor

To deal with these hazards and other related hazards, the tractor requires optional equipment such as OPS (operator-protective-structure), FOPS (falling-object-protective-structure), and so on. This optional equipment, however, is not available for this tractor. Without optional equipment such as OPS and FOPS, the use of the tractor is limited to tractor-specific-applications like transport and stationary work.

Implement		Remarks	BX1880	BX2380 and BX2680
Mower	Mid-mount	Max. Cutting Width	54 in. (137 cm)	60 in. (152 cm)
		Max. Weight	210 lbs. (95 kg)	295 lbs. (134 kg)
	Rotary Cutter (1 Blade)	Max. Cutting Width	42 in. (107 cm)	48 in. (122 cm)
		Max. Weight	350 lbs. (159 kg)	400 lbs. (181 kg)
	Rear-mount (2 or 3 Blade)	Max. Cutting Width	48 in. (122 cm)	60 in. (152 cm)
		Max. Weight	486 lbs. (220 kg)	577 lbs. (262 kg)
	Flail-mower	Max. Cutting Width	42 in. (107 cm)	42 in. (107 cm)
	Sickle Bar	Max. Cutting Width	48 in. (122 cm)	48 in. (122 cm)
Rotary Tiller		Max. Tilling Width	42 in. (107 cm)	50 in. (127 cm)
		Max. Weight	404 lbs. (183 kg)	435 lbs. (197 kg)
Bottom Plow		Max. Size	12 in. x 1	12 in. x 1
Disc Plow		Max. Size	22 in. x 1	22 in. x 1
Cultivator		Max. Size	48 in. (122 cm) 1 Row	48 in. (122 cm) 1 Row
Disc Harrow		Max. Harrowing Width	48 in. (122 cm)	48 in. (122 cm)
		Max. Weight	421 lbs. (191 kg)	549 lbs. (249 kg)
Sprayer		Max. Tank Capacity	40 U.S. gals. (150 L)	40 U.S. gals. (150 L)
Front Blade		Max. Cutting Width	54 in. (137 cm)	60 in. (152 cm)
		Sub Frame	Necessary	Necessary

Implement	Remarks	BX1880	BX2380 and BX2680
Rear Blade	Max. Cutting Width	60 in. (152 cm)	60 in. (152 cm)
	Max. Weight	248 lbs. (112 kg)	248 lbs. (112 kg)
Front Loader	Max. Lifting Capacity (Bucket pivot pin, Max. height)	739 lbs.* ¹ (335 kg)	739 lbs.* ¹ (335 kg)
	Max. Width	48 in. (122 cm)	48 in. (122 cm)
Box Blade	Max. Cutting Width	60 in. (152 cm)	60 in. (152 cm)
	Max. Weight	375 lbs. (170 kg)	375 lbs. (170 kg)
Snow Blower (Front)	Max. Working Width	50 in. (127 cm)	50 in. (127 cm)
	Max. Weight	353 lbs. (160 kg)	353 lbs. (160 kg)
	Sub Frame	Necessary	Necessary
Post Hole Digger	Digging Depth	45 in. (114 cm)	45 in. (114 cm)
Rotary Broom	Cleaning Width	47 in. (119 cm)	47 in. (119 cm)
Trailer	Max. Load Capacity	1765 lbs.* ² (800 kg)	1765 lbs.* ² (800 kg)
	Max. Weight	2425 lbs. (1100 kg)	2425 lbs. (1100 kg)

NOTE:

- You cannot attach backhoes to the tractor
- Implement size may vary depending on soil operating conditions

***1** The value contains the weight of Kubota standard bucket

***2** Reduce speed and trailer loads when operating in slippery conditions or when operating on slopes and using front-wheel-drive.