

IMPLEMENT LIMITATIONS

The L01 Series Kubota Tractor has been thoroughly tested for proper performance with implements sold or approved by Kubota. Use with implements which exceed the maximum specifications listed below, or which are otherwise unfit for use with the Kubota Tractor may result in malfunctions or failures of the tractor, damage to other property and injury to the operator or others. [Any malfunctions or failures of the tractor resulting from use with improper implements are not covered by the warranty.]

Tread (max. width)				Lower link end max. loading weight W0
	Front		Rear	
	2WD	4WD		
L2501 L3301 L3901	1050 mm (41.3 in.)	1095 mm (43.1 in.)	1290 mm (50.8 in.)	900 kg (1985 lbs.)
L4701	1580 mm (62.2 in.)	1155 mm (45.5 in.)		1300 kg (2870 lbs.)


Actual Figures			
	Implement weight W1 and/or size	Max. Drawbar Load W2	Trailer loading weight W3 Max. capacity
L2501	Refer to the list of implements on the following pages	330 kg (730 lbs.)	1000 kg (2,200 lbs.)
L3301			
L3901			
L4701		650 kg (1,430 lbs.)	3000 kg (6,600 lbs.)

Lower link end max. hydraulic lift capacity: W0

Implement weight: The implement weight which you can put on the link: W1

Max. drawbar load: W2

Trailer loading weight: The max loading weight for trailer (without trailer weight): W3

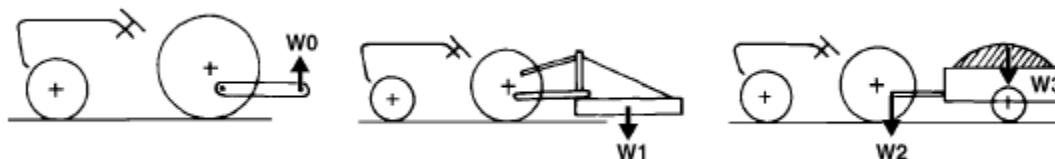

3TMABAB0P109A

■ NOTE

* Implement size may vary depending on soil operating conditions

No.	Implement		Remarks	L2501	L3301	L3901	L4701
1	Trailer		Max. Load Capacity	2,200 lbs.		6,600 lbs.	
			Max. Drawbar Load	730 lbs.		1,430 lbs.	
2	Mower	Rotary Cutter	Max. Cutting Width	60 in.	72 in.	72 in.	
			Max. Weight	770 lbs.		880 lbs.	
		Flail Mower	Max. Cutting Width	50 in.		60 in.	
			Max. Weight	770 lbs.		880 lbs.	
		Sickle Bar	Max. Cutting Width	72 in.		84 in.	
			Max. Weight	880 lbs.		1,100 lbs.	
3	Sprayer	Rear Mount	Max. Tank Capacity	80 U.S. Gal., 66 Imp. Gal.		106 U.S. Gal., 88 Imp. Gal.	
		Pull Type	Max. Tank Capacity	210 U.S. Gal., 176 Imp. Gal.		317 U.S. Gal., 264 Imp. Gal.	
4	Rotary Tiller		Max. Tilling Width	54 in.		60 in.	
5	Bottom Plow		Max. Size	12 in. x 2, 16 in. x 1		14 in. x 2	
6	Disc Harrow: Pull Type		Max. Harrowing Width	60 in.		78 in.	
			Max. Weight	660 lbs.		880 lbs.	
7	Chisel Plow		Max. Width	72 in.		72 in.	
			Max. Weight	770 lbs.		770 lbs.	
8	Broadcaster		Max. Tank Capacity	53 U.S. Gal., 44 Imp. Gal.		80 U.S. Gal., 66 Imp. Gal.	
			Max. Weight	220 lbs.		220 lbs.	
9	Manure Spreader		Max. Capacity	2,200 lbs.		4,400 lbs.	
10	Cultivator		Max. Width	60 in.		84 in.	
			Number of Rows	1		2	
			Max. Weight	550 lbs.		880 lbs.	
11	Front Blade		Max. Cutting Width	72 in.		72 in.	
			Max. Oil Pressure	15.9 MPa (2,311 psi)		17.2 MPa (2,490 psi)	
			Sub Frame	Necessary		Necessary	
12	Rear Blade		Max. Cutting Width	72 in.		72 in.	
			Max. Oil Pressure	15.9 MPa (2,311 psi)		17.2 MPa (2,490 psi)	

No.	Implement	Remarks	L2501	L3301	L3901	L4701
13	Front-end Loader	Max. Lift Cap. to Max. Height	1,082 lbs.	1,131 lbs.		1,684 lbs.
		Max. Oil Pressure	15.9 MPa (2,311 psi)			18.0 MPa (2,560 psi)
		Sub Frame	Necessary			Necessary
14	Box Blade	Max. Cutting Width	52 in.			65 in.
		Max. Weight	694 lbs.			925 lbs.
15	Backhoe	Max. Digging Depth	90 in.			90 in.
		Max. Weight	926 lbs.			990 lbs.
		Sub Frame	Necessary			Necessary
16	Snow Blade	Max. Width	60 in.			72 in.
		Max. Weight	660 lbs.			770 lbs.
17	Snow Blower	Max. Working Width	60 in.			66 in.
		Max. Weight	550 lbs.			620 lbs.

■ NOTE

* Implement size may vary depending on soil operating conditions

Front End Loader

Front Hitch and
Implements

Backhoe

3-Point Implements

Mid-Mount Mower
and Accessories

Dealer-Installed Options