


# Specifications

Model		KX057-5		KX057-5 Angle Blade	
Type of ROPS / FOPS		Canopy / Cab			
Type of tracks		Rubber / Steel		Rubber / Steel	
Engine	Model	V2607-CR-E5-BH1 / V2607-CR-E5-BH2			
	Output (SAE J1995 gross)	HP (kW) @ rpm	47.6 (35.5) @ 2200		
	Output (SAE J1349 net)	HP (kW) @ rpm	46.4 (34.6) / 45.5 (33.9) @ 2200		
	Displacement	cu. in. (cc)	159.6 (2615)		
Dimensions	Overall length	ft. in. (mm)	18'1" (5520)		
	Overall height	ft. in. (mm)	8'4" (2550)		
	Overall width	ft. in. (mm)	6'5" (1960)		
	Min. ground clearance	ft. in. (mm)	12.2" (310)		
Hydraulic system	Pump capacity	GPM (ℓ/min)	14.8 (56.1) Variable × 2 / 9.8 (37.0) Gear × 1		
	Auxiliary hydraulic flow	AUX1 / AUX2 GPM (ℓ/min)	19.8 (75) / 9.8 (37)		
	Max. breakout force	Bucket / Arm lbs. (kgf)	10172 (4614) / 5463 (2478)		
Drive system	Travel speed	Low / High mph (km/h)	1.7 (2.8) / 3.0 (4.8)		
	Max. traction force	Low speed lbs. (kgf)	10139 (4599)		
	Tumbler distance	ft. in. (mm)	6'6" (1990)		
	Crawler length	ft. in. (mm)	8'2" (2500)		
	Shoe width	Rubber / Steel ft. in. (mm)	15.7" (400)		
	Ground contact pressure	Rubber Canopy / Cab psi (kgf/cm <sup>2</sup> )	4.6 (0.32) / 4.7 (0.33)	4.8 (0.33) / 4.9 (0.34)	
	Steel Canopy / Cab psi (kgf/cm <sup>2</sup> )	4.7 (0.33) / 4.8 (0.33)	4.9 (0.34) / 4.9 (0.35)		
Swing system	Unit swing speed	rpm	9.2		
	Boom swing angle	Left / Right degree	70 / 53		
Blade	Dimensions	Width ft. in. (mm)	6'5.2" (1960)		
		Height ft. in. (mm)	16.1" (410)	16.7" (425)	
	Max. lift above ground	in. (mm)	17.3" (440)	20.1" (510)	
	Max. drop below ground	in. (mm)	15.9" (405)	18.3" (465)	
Angle	Left / Right degree	-		25 / 25	
Hydraulic oil (Reservoir / System)		gal (ℓ)	11.1 (41.9) / 20.3 (77.0)		
Fuel reservoir		gal (ℓ)	19.3 (73.0)		
Operating weight (Including operator's weight @ 165 lbs.)	Rubber Canopy / Cab	lbs. (kgf)	12346 (5600) / 12577 (5705)	12820 (5815) / 13051 (5920)	
	Steel Canopy / Cab	lbs. (kgf)	12632 (5730) / 12864 (5835)	13106 (5945) / 13338 (6050)	

# Working range

Model		KX057-5		
A	Max. digging height	ft. in. (mm)	19'0" (5785)	
B	Max. dumping height	ft. in. (mm)	13'8" (4155)	
C	Max. digging depth	ft. in. (mm)	12'9" (3875)	
D	Max. vertical digging depth	ft. in. (mm)	5'4" (1630)	
E	Max. digging radius, at ground level	ft. in. (mm)	20'1" (6125)	
F	Max. digging radius	ft. in. (mm)	20'7" (6260)	
G	Min. turning radius	W/o swing	ft. in. (mm)	7'11" (2410)
		With swing	ft. in. (mm)	6'6" (1990)
H	Min. tail turning radius	ft. in. (mm)	4'2" (1270)	

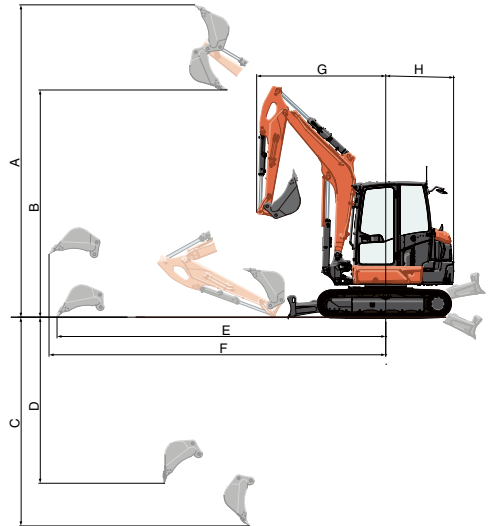

Kubota Tractor Corporation reserves the right to change the stated specifications without notice. This brochure is for descriptive purposes only and reasonable efforts were used to set forth the contained information; some items shown may be optional and some products shown may not be available at all dealerships. Kubota disclaims all representations and warranties, express or implied, or any liability from the use of this brochure. For complete warranty, safety and product information, consult your local Kubota dealer and the operator's manual. Power (HP/KW) and other specifications are based on various standards or recommended practices. For your safety, Kubota strongly recommends the use of a Rollover Protective Structure (ROPS) and seat belt in almost all applications. This brochure is intended for the United States and US territories only. For information regarding Kubota products or services outside these areas, see Kubota Corporation's global web site. Kubota does not provide parts, warranty or service for any Product which is re-sold or retailed in any country other than the country for which the Product(s) were designed or manufactured.



## KUBOTA TRACTOR CORPORATION

1000 Kubota Drive, Grapevine, TX 76051 Tel 888-4 KUBOTA

Visit our web site at: [www.kubotausa.com](http://www.kubotausa.com)

©2020 Kubota Corporation



**Kubota  
Genuine Parts**  
for maximum  
performance,  
durability and  
safety

